


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

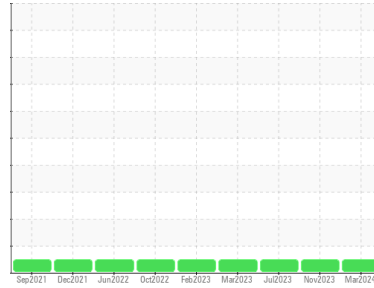

Machine Id  
**211772**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0120658</b>	PCA0113396	PCA0103030
Sample Date	Client Info	<b>12 Mar 2024</b>	22 Nov 2023	27 Jul 2023
Machine Age	mls Client Info	<b>66633</b>	60633	0
Oil Age	mls Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>48</b>	34	21
Chromium	ppm ASTM D5185m >20	<b>2</b>	2	2
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>21</b>	15	9
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>5</b>	3	3
Tin	ppm ASTM D5185m >15	<b>1</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>4</b>	6	8
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>61</b>	65	66
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 950	<b>813</b>	919	973
Calcium	ppm ASTM D5185m 1050	<b>1074</b>	1099	1163
Phosphorus	ppm ASTM D5185m 995	<b>844</b>	1054	1044
Zinc	ppm ASTM D5185m 1180	<b>1014</b>	1282	1284
Sulfur	ppm ASTM D5185m 2600	<b>2961</b>	3139	3766

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	6	4
Sodium	ppm ASTM D5185m	<b>5</b>	1	2
Potassium	ppm ASTM D5185m >20	<b>22</b>	16	8



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.5	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>10.7</b>	9.5	7.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.8</b>	19.3	18.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.6</b>	15.9	14.3
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.8</b>	7.8	9.0









# OIL ANALYSIS REPORT

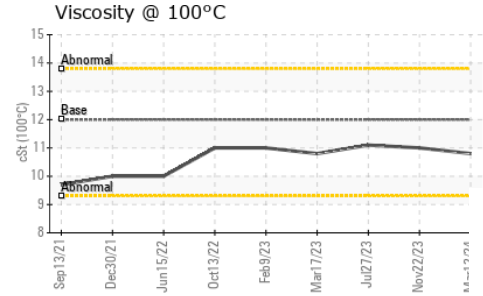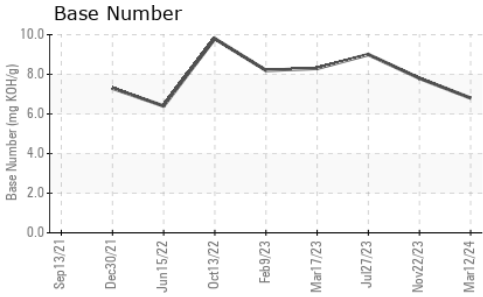

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	11.0	11.1

## GRAPHS

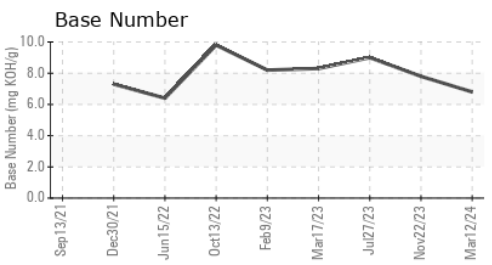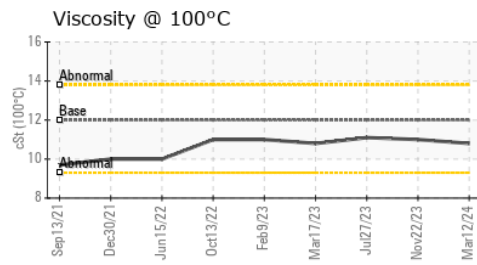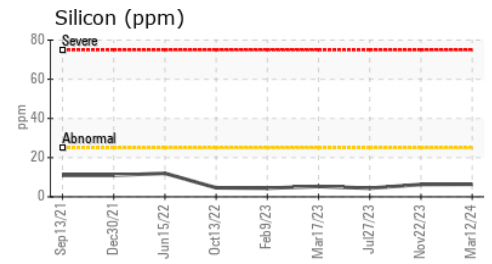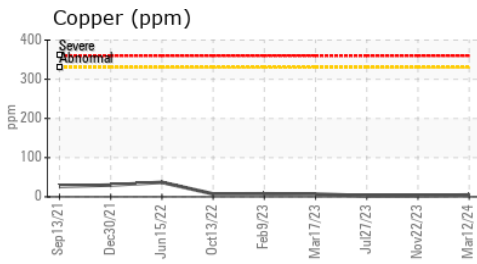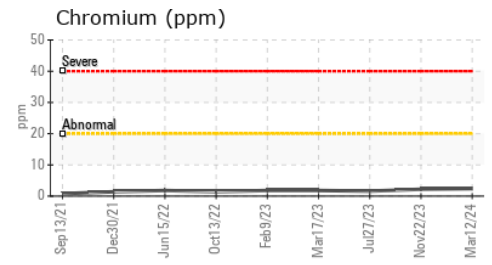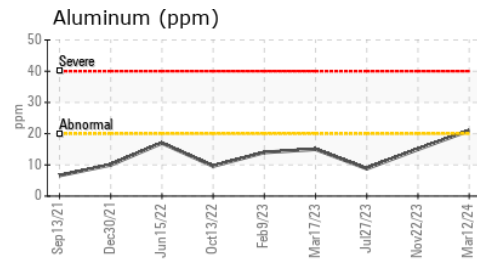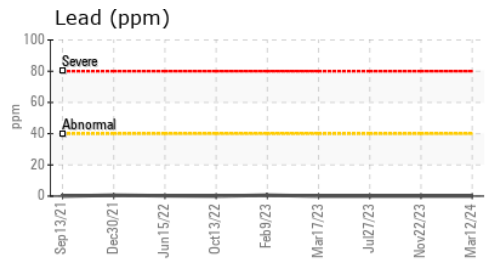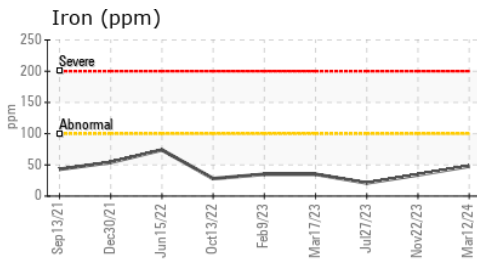

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0120658 **Received** : 15 Mar 2024  
**Lab Number** : 06119260 **Tested** : 15 Mar 2024  
**Unique Number** : 10928093 **Diagnosed** : 15 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (201)528-7053