



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Machine Id
934077

Component
Natural Gas Engine

Fluid
{not provided} (--- LTR)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0113982	---	---
Sample Date	Client Info	11 Mar 2024	---	---
Machine Age	hrs Client Info	1173	---	---
Oil Age	hrs Client Info	1173	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	▲ 60	---	---
Chromium ppm	ASTM D5185m >4	▲ 7	---	---
Nickel ppm	ASTM D5185m >2	0	---	---
Titanium ppm	ASTM D5185m	0	---	---
Silver ppm	ASTM D5185m >3	0	---	---
Aluminum ppm	ASTM D5185m >9	89	---	---
Lead ppm	ASTM D5185m >30	8	---	---
Copper ppm	ASTM D5185m >35	17	---	---
Tin ppm	ASTM D5185m >4	2	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	10	---	---
Barium ppm	ASTM D5185m	4	---	---
Molybdenum ppm	ASTM D5185m	58	---	---
Manganese ppm	ASTM D5185m	6	---	---
Magnesium ppm	ASTM D5185m	810	---	---
Calcium ppm	ASTM D5185m	1244	---	---
Phosphorus ppm	ASTM D5185m	735	---	---
Zinc ppm	ASTM D5185m	913	---	---
Sulfur ppm	ASTM D5185m	2396	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >+100	83	---	---
Sodium ppm	ASTM D5185m	7	---	---
Potassium ppm	ASTM D5185m >20	298	---	---

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	---	---
Nitration	Abs/cm *ASTM D7624 >20	12.8	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	27.6	---	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	24.6	---	---
Base Number (BN)	mg KOH/g ASTM D2896	2.6	---	---



OIL ANALYSIS REPORT







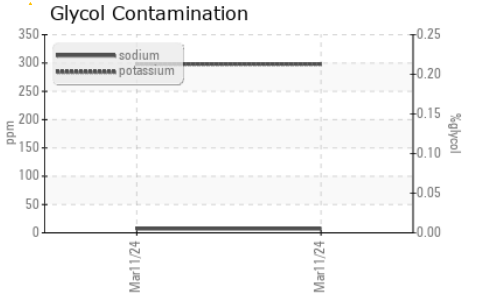


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

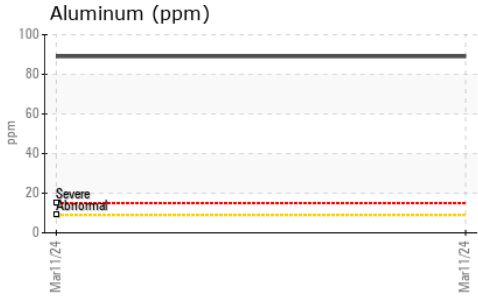

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	---	---

GRAPHS

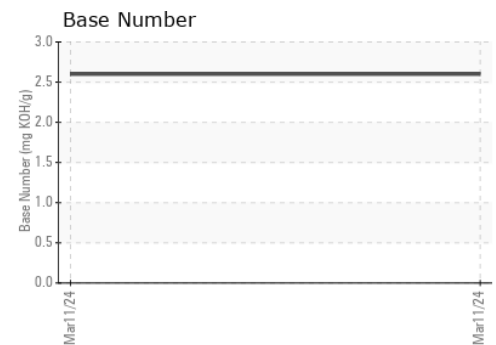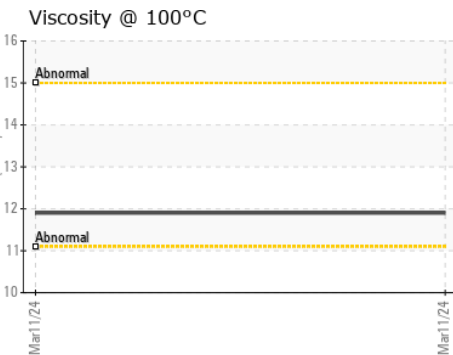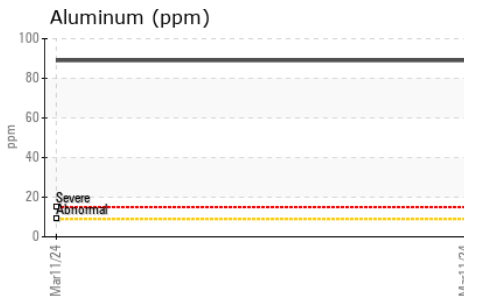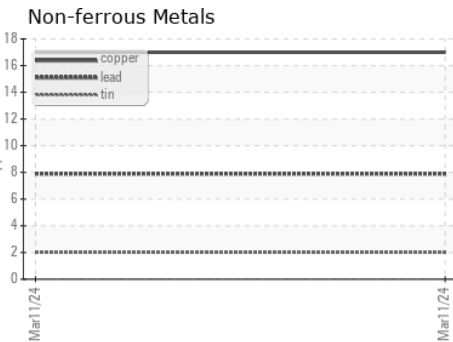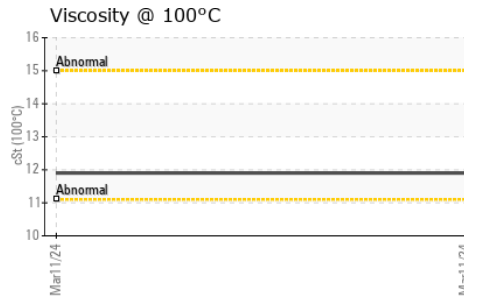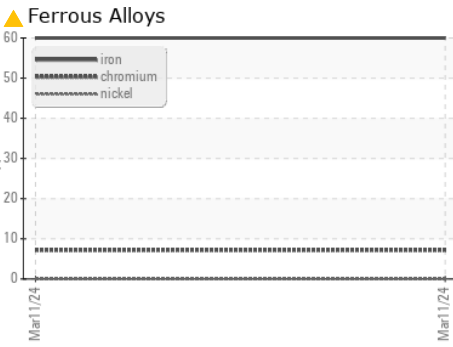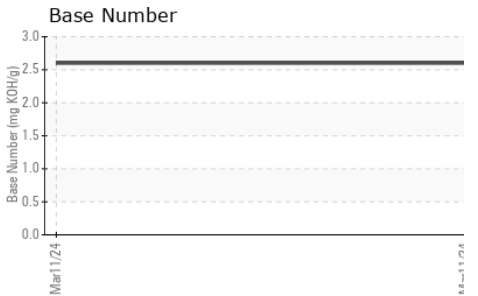

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113982
Lab Number : 06119429
Unique Number : 10928262
Test Package : FLEET

GFL Environmental - 932 - Muskego HC
 W144 S6400 College Ct.
 Muskego, WI
 US 53150
 Contact: Brian Schломann
 brian.schlomann@gflenv.com
 T: (262)510-4586
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)