




OIL ANALYSIS REPORT

Sample Rating Trend

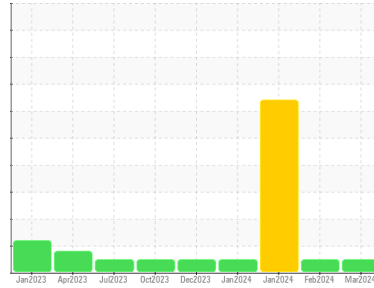

NORMAL



Machine Id
443001
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0114021	GFL0109823	GFL0103274
Sample Date	Client Info	13 Mar 2024	14 Feb 2024	26 Jan 2024
Machine Age	hrs	15918	15760	15627
Oil Age	hrs	0	0	1200
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	15	12	▲ 77
Chromium	ppm ASTM D5185m >4	<1	1	▲ 9
Nickel	ppm ASTM D5185m >2	0	<1	3
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m >3	0	0	<1
Aluminum	ppm ASTM D5185m >9	2	2	▲ 8
Lead	ppm ASTM D5185m >30	<1	3	▲ 14
Copper	ppm ASTM D5185m >35	15	13	▲ 99
Tin	ppm ASTM D5185m >4	0	<1	<1
Vanadium	ppm ASTM D5185m	0	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	12	27	10
Barium	ppm ASTM D5185m 5	0	0	2
Molybdenum	ppm ASTM D5185m 50	51	54	98
Manganese	ppm ASTM D5185m 0	<1	<1	2
Magnesium	ppm ASTM D5185m 560	516	560	551
Calcium	ppm ASTM D5185m 1510	1476	1540	1614
Phosphorus	ppm ASTM D5185m 780	731	789	743
Zinc	ppm ASTM D5185m 870	905	998	1015
Sulfur	ppm ASTM D5185m 2040	2419	2588	2466

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	4	6	18
Sodium	ppm ASTM D5185m	67	62	▲ 600
Potassium	ppm ASTM D5185m >20	21	21	▲ 206

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0	0
Nitration	Abs/cm *ASTM D7624 >20	10.3	8.3	13.9
Sulfation	Abs/.1mm *ASTM D7415 >30	19.7	19.0	26.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.0	15.8	21.7
Base Number (BN)	mg KOH/g ASTM D2896 10.2	5.4	7.9	3.8







OIL ANALYSIS REPORT

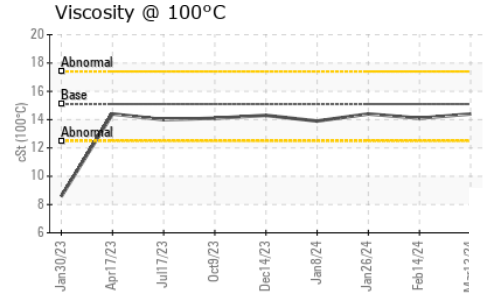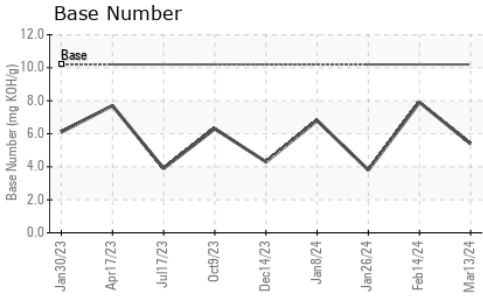

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.4	14.1	14.4

GRAPHS

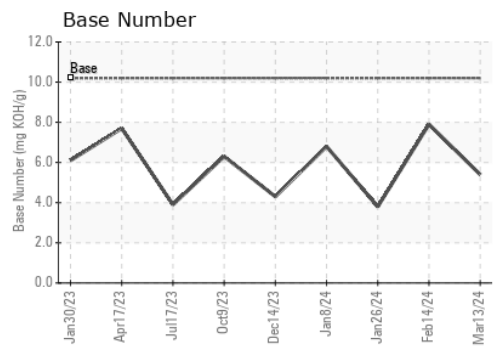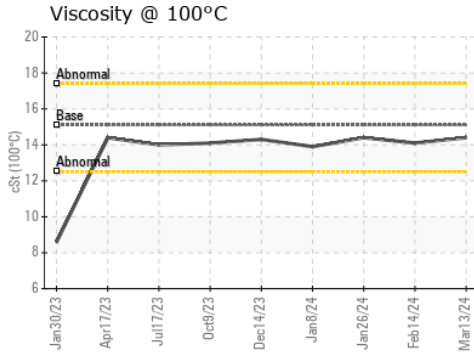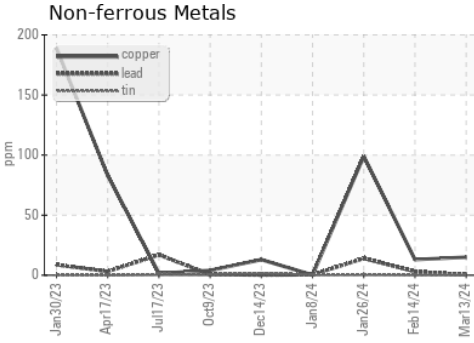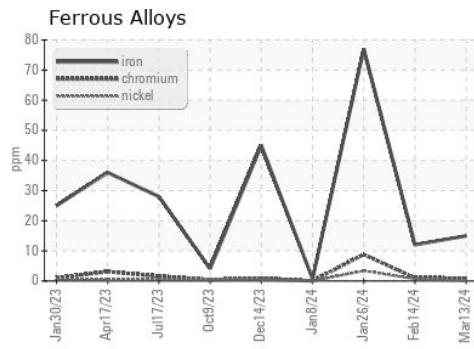

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114021
Lab Number : **06119430**
Unique Number : 10928263
Test Package : FLEET
Received : 15 Mar 2024
Tested : 18 Mar 2024
Diagnosed : 18 Mar 2024 - Wes Davis

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)