


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

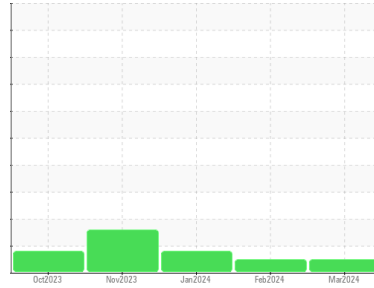

Machine Id
2423
Component
Biogas Engine
Fluid
LO-ASH ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0111218	PCA0111212	PCA0111228	
Sample Date	Client Info	07 Mar 2024	09 Feb 2024	12 Jan 2024	
Machine Age	hrs	Client Info	49186	48610	47953
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A	
Sample Status		NORMAL	NORMAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >45	27	31	43
Chromium	ppm ASTM D5185m >2	<1	0	<1
Nickel	ppm ASTM D5185m >2	0	<1	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >5	0	0	0
Aluminum	ppm ASTM D5185m >10	2	2	2
Lead	ppm ASTM D5185m >5	<1	<1	<1
Copper	ppm ASTM D5185m >14	9	10	▲ 14
Tin	ppm ASTM D5185m >13	0	<1	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 37	0	0	<1
Barium	ppm ASTM D5185m 12	0	0	0
Molybdenum	ppm ASTM D5185m 200	3	2	4
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m 5	41	47	48
Calcium	ppm ASTM D5185m 1600	1326	1285	1349
Phosphorus	ppm ASTM D5185m 300	304	306	330
Zinc	ppm ASTM D5185m 400	404	409	407
Sulfur	ppm ASTM D5185m 2600	2305	2255	2340

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >200	2	2	9
Sodium	ppm ASTM D5185m	0	2	2
Potassium	ppm ASTM D5185m >20	<1	<1	0
Fuel	% ASTM D3524 >4.0	0.2	0.2	0.1





INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0	0
Nitration	Abs/cm *ASTM D7624 >20	4.7	4.6	4.3
Sulfation	Abs/.1mm *ASTM D7415 >30	16.5	16.3	15.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	11.4	11.1	10.6
Acid Number (AN)	mg KOH/g ASTM D8045	0.60	0.58	0.42
Base Number (BN)	mg KOH/g ASTM D2896 3.0	3.56	3.72	3.71









OIL ANALYSIS REPORT

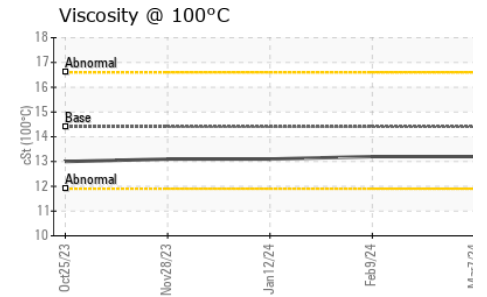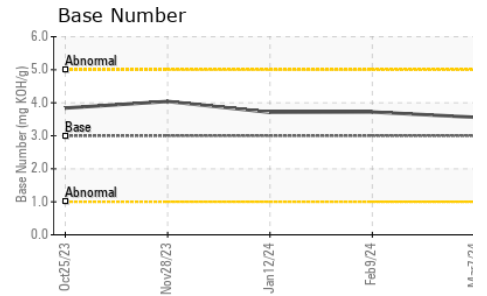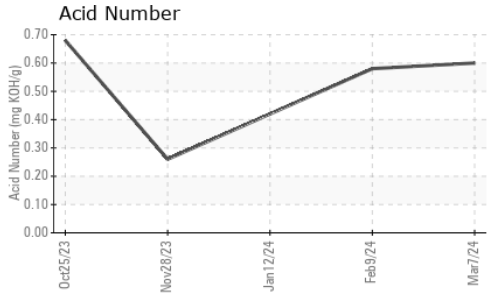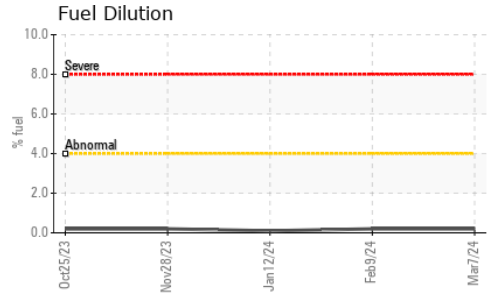

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	13.2	13.1

GRAPHS

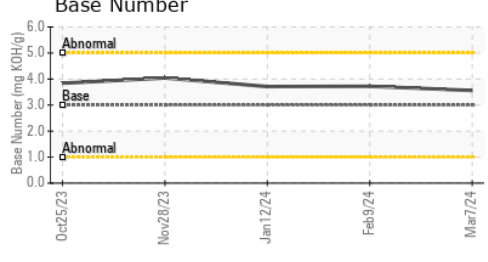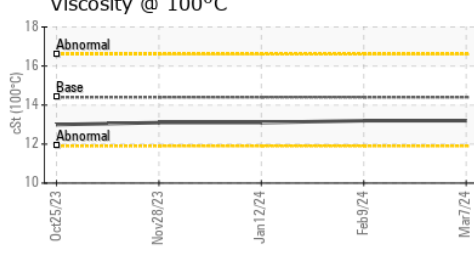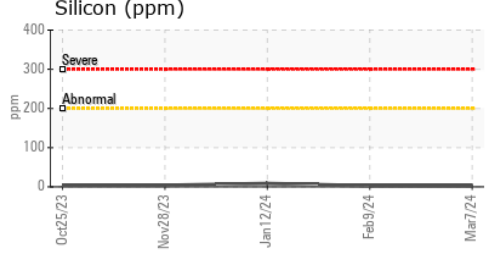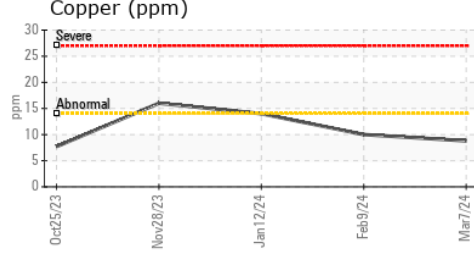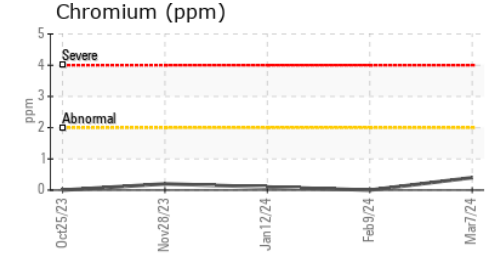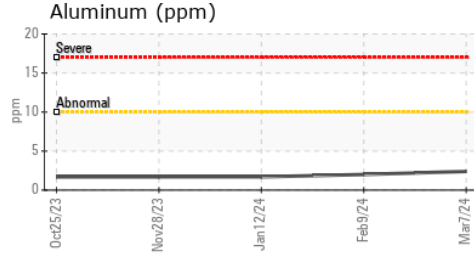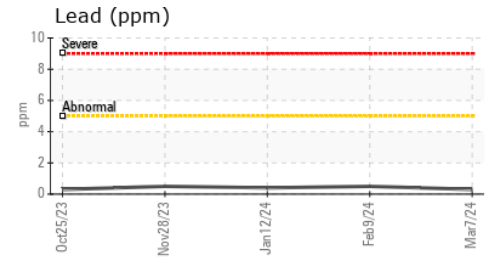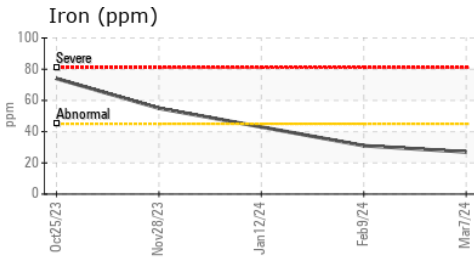

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111218 **Received** : 15 Mar 2024
Lab Number : **06119726** **Tested** : 18 Mar 2024
Unique Number : 10928559 **Diagnosed** : 19 Mar 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

USA COMPRESSION
 375 S MAIN STREET
 MANSFIELD, PA
 US 16933

Contact: JASON KUZNESKI
 jkuzneski@usacompression.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: