



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
834093

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (29 QTS)

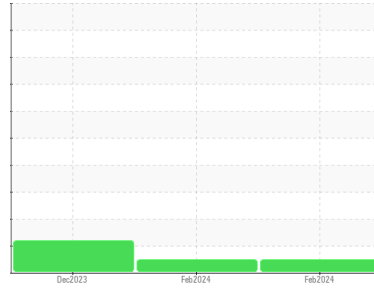

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0114109	GFL0108087	GFL0102426
Sample Date	Client Info	27 Feb 2024	07 Feb 2024	15 Dec 2023
Machine Age	hrs	322	255	226
Oil Age	hrs	322	226	0
Oil Changed	Client Info	Not Changed	Not Changed	N/A
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	53	53	56
Chromium	ppm ASTM D5185m >4	1	2	1
Nickel	ppm ASTM D5185m >2	0	1	2
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >9	31	32	21
Lead	ppm ASTM D5185m >30	<1	2	<1
Copper	ppm ASTM D5185m >35	20	19	21
Tin	ppm ASTM D5185m >4	1	2	1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	20	22	32
Barium	ppm ASTM D5185m 5	2	3	4
Molybdenum	ppm ASTM D5185m 50	51	52	53
Manganese	ppm ASTM D5185m 0	13	14	15
Magnesium	ppm ASTM D5185m 560	732	778	811
Calcium	ppm ASTM D5185m 1510	1086	1090	1172
Phosphorus	ppm ASTM D5185m 780	604	730	826
Zinc	ppm ASTM D5185m 870	822	877	932
Sulfur	ppm ASTM D5185m 2040	2075	2339	2515

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	38	39	44
Sodium	ppm ASTM D5185m	6	6	8
Potassium	ppm ASTM D5185m >20	120	115	▲ 100

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0	0.6
Nitration	Abs/cm *ASTM D7624 >20	11.1	10.1	8.5
Sulfation	Abs/.1mm *ASTM D7415 >30	21.3	20.6	20.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.2	18.9	17.3
Base Number (BN)	mg KOH/g ASTM D2896 10.2	4.2	5.6	7.1







OIL ANALYSIS REPORT

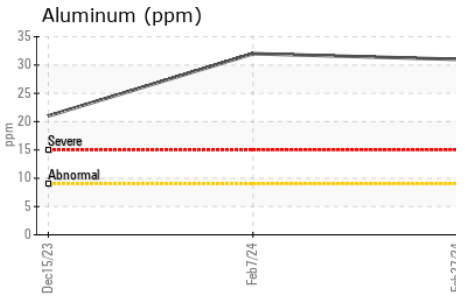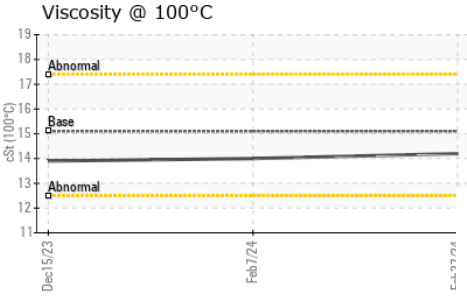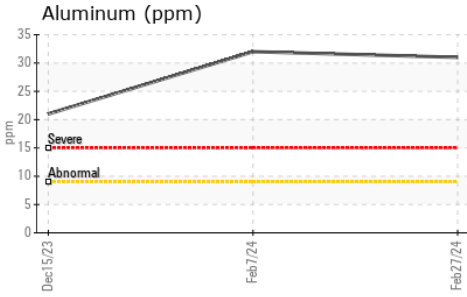

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	14.0	13.9

GRAPHS

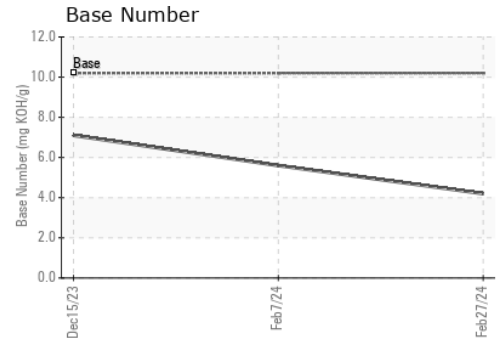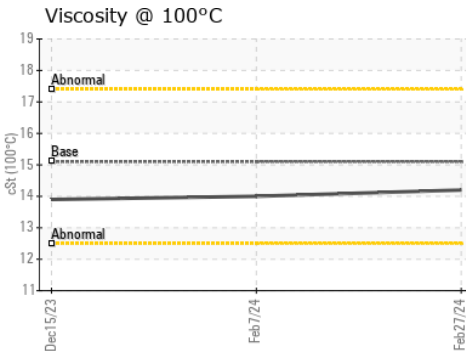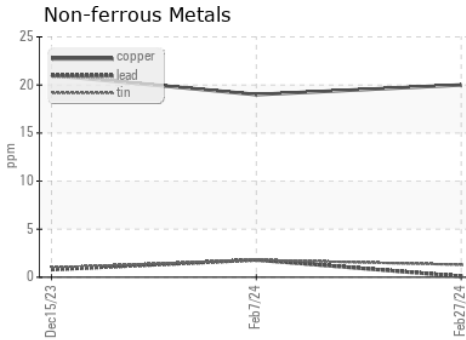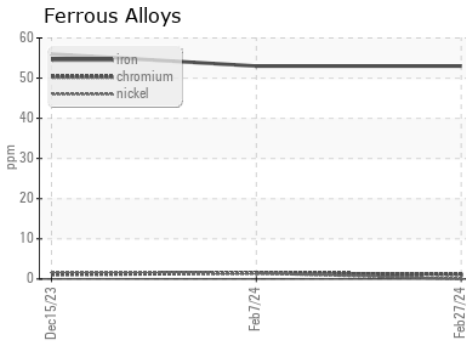

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0114109
 Lab Number : **06120116**
 Unique Number : 10928949
 Test Package : FLEET

Received : 15 Mar 2024
 Tested : 18 Mar 2024
 Diagnosed : 18 Mar 2024 - Wes Davis

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Christopher Gilkey
 cgilkey@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: