

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id 834050

Fluid

Component Natural Gas Engine

PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS	

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

	story2
Sample Number Client Info GFL0114126 GFL0102413 GFL01	08155
Sample Date Client Info 07 Mar 2024 07 Feb 2024 15 Jan	2024
Machine AgehrsClient Info1063868737	
Oil Age hrs Client Info 1063 737 0	
Oil Changed Client Info N/A Not Changd Not Ch	nangd
Sample Status NORMAL NORMAL NORM	IAL
CONTAMINATION method limit/base current history1 hi	story2
Water WC Method >0.1 NEG NEG NEG	G
WEAR METALS method limit/base current history1 hi	story2
Iron ppm ASTM D5185m >50 53 65 56	
Chromium ppm ASTM D5185m >5 <1	
Nickel ppm ASTM D5185m >4 0 1 2	
Titanium ppm ASTM D5185m >5 0 <1	
Silver ppm ASTM D5185m >3 <1	
Aluminum ppm ASTM D5185m >25 3 4 4	
Lead ppm ASTM D5185m >40 <1 2 2	
Copper ppm ASTM D5185m >150 14 16 16	
Tin ppm ASTM D5185m >4 2 3 2	
Vanadium ppm ASTM D5185m 0 <1	
Cadmium ppm ASTM D5185m 0 <1	
ADDITIVES method limit/base current history1 hi	story2
Boron ppm ASTM D5185m 50 12 8 17	
Barium ppm ASTM D5185m 5 2 3 0	
Molybdenum ppm ASTM D5185m 50 59 64 62	
Manganese ppm ASTM D5185m 0 8 10 9	
Magnesium ppm ASTM D5185m 560 667 777 706	
Calcium ppm ASTM D5185m 1510 1133 1042 102	
Phosphorus ppm ASTM D5185m 780 690 731 672	
Zinc ppm ASTM D5185m 870 871 919 878 Out ASTM D5185m 870 871 919 878	
Sulfur ppm ASTM D5185m 2040 2172 2340 238	
	story2
Silicon ppm ASTM D5185m >25 20 27 28	
Sodium ppm ASTM D5185m 4 4 9	
Potassium ppm ASTM D5185m >20 <1	
INFRA-RED method limit/base current history1 hi	story2
INFRA-RED method limit/base current history1 hi Soot % % *ASTM D7844 0 0 0	
INFRA-RED method limit/base current history1 hi	
INFRA-RED method limit/base current history1 hi Soot % % *ASTM D7844 0 0 0	2
INFRA-RED method limit/base current history1 hi Soot % % *ASTM D7844 0 0 0 Nitration Abs/cm *ASTM D7624 >20 11.7 11.6 11.7 Sulfation Abs/.1mm *ASTM D7415 >30 23.9 24.5 23.4	2
INFRA-RED method limit/base current history1 hi Soot % % *ASTM D7844 0 0 0 Nitration Abs/cm *ASTM D7624 >20 11.7 11.6 11.7 Sulfation Abs/.1mm *ASTM D7415 >30 23.9 24.5 23.3	2 3 story2




Abnormal

12

Dct26/23

OIL ANALYSIS REPORT

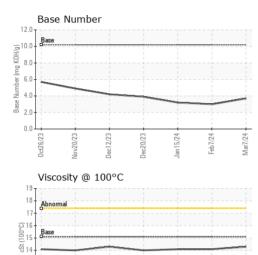


Dec12/23

0.00 m

Jan 15/24

Feb7/24

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.3	14.1	14.1
GRAPHS						
Ferrous Alloys						
T						
iron		\wedge				
0 - new chromium		\wedge				
50 - nickel		\frown				
60 - Chromium 50 - Nickel						
60 - Chromium 50 - Nickel			×			
60 - chromium			\			
contraction of the second seco			\			

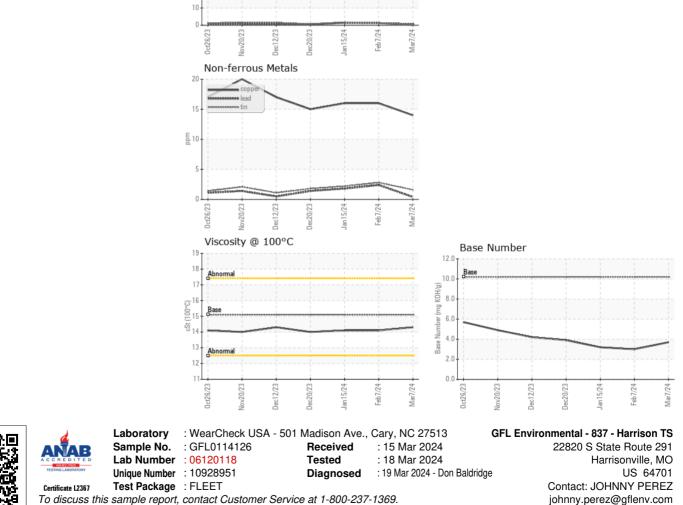

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Т:

F: