


# OIL ANALYSIS REPORT

## Sample Rating Trend



ISO

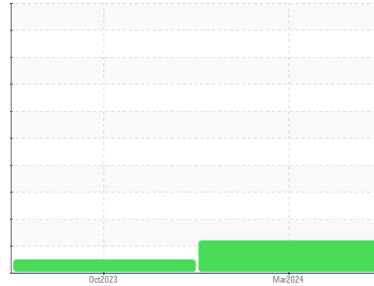

Area  
**Wamble**  
Machine Id  
**JOHN DEERE 644P 244 (S/N 1DW644PAANLZ15485)**  
Component  
**Hydraulic System**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (27 GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0105140</b>	PCA0096411	---
Sample Date	Client Info	<b>12 Mar 2024</b>	04 Oct 2023	---
Machine Age	hrs	<b>3855</b>	2000	---
Oil Age	hrs	<b>3855</b>	2000	---
Oil Changed	Client Info	<b>Changed</b>	Oil Added	---
Sample Status		<b>ABNORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>2</b>	0	---
Chromium	ppm ASTM D5185m >10	<b>0</b>	<1	---
Nickel	ppm ASTM D5185m >10	<b>0</b>	<1	---
Titanium	ppm ASTM D5185m	<b>0</b>	0	---
Silver	ppm ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >10	<b>0</b>	0	---
Lead	ppm ASTM D5185m >10	<b>&lt;1</b>	<1	---
Copper	ppm ASTM D5185m >75	<b>1</b>	<1	---
Tin	ppm ASTM D5185m >10	<b>0</b>	0	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 6	<b>69</b>	19	---
Barium	ppm ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m 0	<b>&lt;1</b>	0	---
Manganese	ppm ASTM D5185m	<b>0</b>	0	---
Magnesium	ppm ASTM D5185m 145	<b>15</b>	6	---
Calcium	ppm ASTM D5185m 3570	<b>2452</b>	721	---
Phosphorus	ppm ASTM D5185m 1290	<b>897</b>	734	---
Zinc	ppm ASTM D5185m 1640	<b>1124</b>	978	---
Sulfur	ppm ASTM D5185m	<b>2907</b>	1998	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>6</b>	3	---
Sodium	ppm ASTM D5185m	<b>2</b>	0	---
Potassium	ppm ASTM D5185m >20	<b>0</b>	5	---





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 14957</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>120</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>13</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>5</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>1</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>▲ 0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 21/14/11</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 1.8	<b>0.79</b>	---	---

# OIL ANALYSIS REPORT

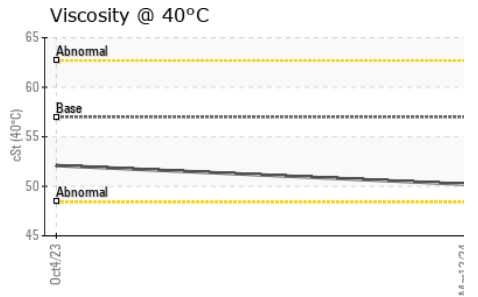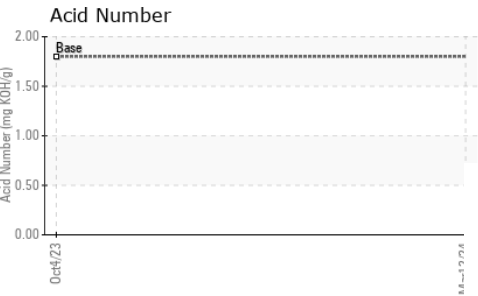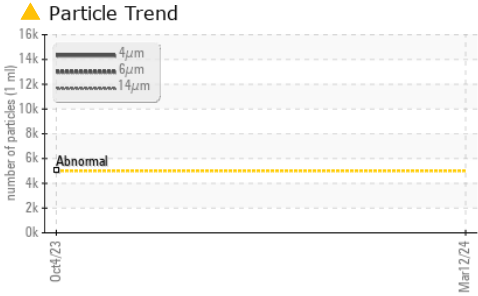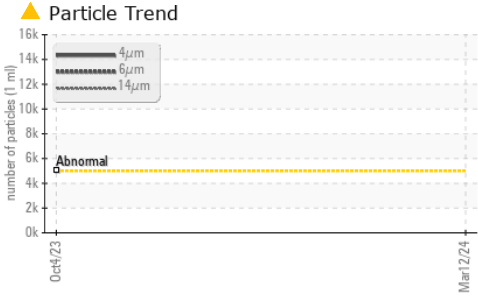





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	50.2	52.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

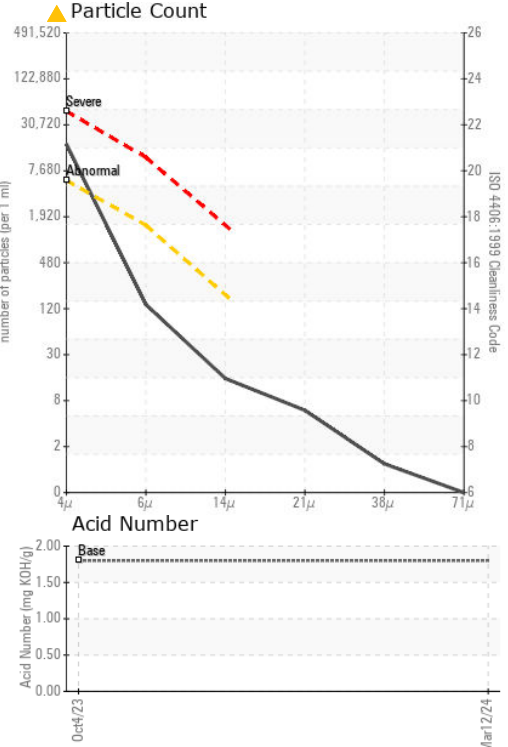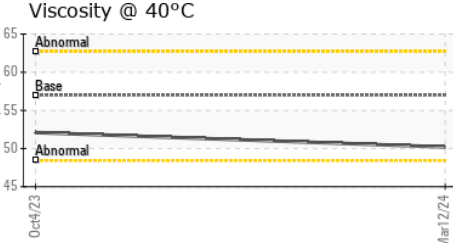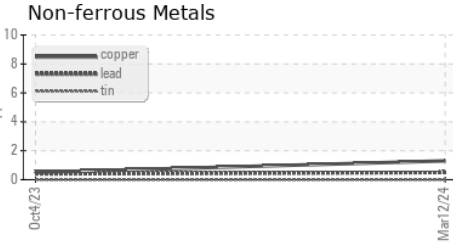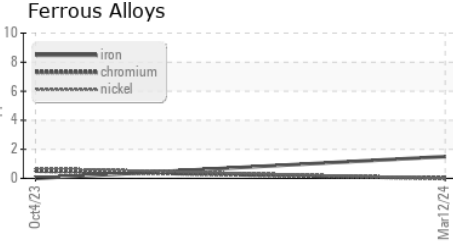

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105140 **Received** : 15 Mar 2024  
**Lab Number** : 06120165 **Tested** : 18 Mar 2024  
**Unique Number** : 10928998 **Diagnosed** : 19 Mar 2024 - Don Baldrige  
**Test Package** : MOB 2

**CENTRAL VALLEY AG**  
 5707 LANGWORTH  
 OAKDALE, CA  
 US 95361  
 Contact: LAB TECH  
 m-labtech@outlook.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)