

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
CM55 L-14 SAT REDUCTION
 Component
Gearbox
 Fluid
PETRO CANADA ENDURATEX EP 150 (27 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | PCA0119620 | --- | --- |
| Sample Date | Client Info | | 08 Mar 2024 | --- | --- |
| Machine Age | hrs | Client Info | 0 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >200 | 22 | --- | --- |
| Chromium | ppm | ASTM D5185m >15 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m >15 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >25 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m >100 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >200 | <1 | --- | --- |
| Tin | ppm | ASTM D5185m >25 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m 55 | 65 | --- | --- |
| Barium | ppm | ASTM D5185m 0 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m 0 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m 0 | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185m 2 | 0 | --- | --- |
| Calcium | ppm | ASTM D5185m 6 | 0 | --- | --- |
| Phosphorus | ppm | ASTM D5185m 250 | 224 | --- | --- |
| Zinc | ppm | ASTM D5185m 3 | 0 | --- | --- |
| Sulfur | ppm | ASTM D5185m 7500 | 8109 | --- | --- |



CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >50 | 2 | --- | --- |
| Sodium | ppm | ASTM D5185m | <1 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 0 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.5 | 0.54 | --- | --- |

OIL ANALYSIS REPORT

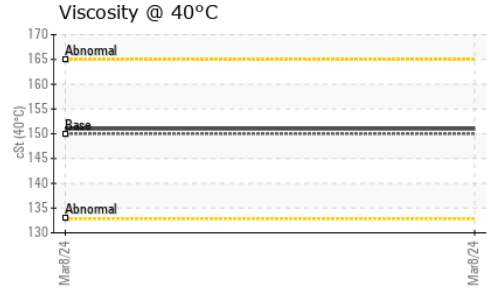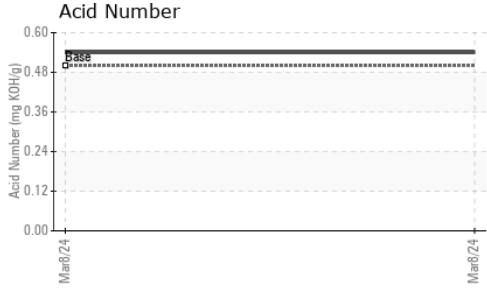




| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|------------|----------|-----|
| Visc @ 40°C | cSt | ASTM D445 | 150.0 | 151 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | |
|--------|--|----------|----------|
| Color | | no image | no image |
| Bottom | | no image | no image |

GRAPHS

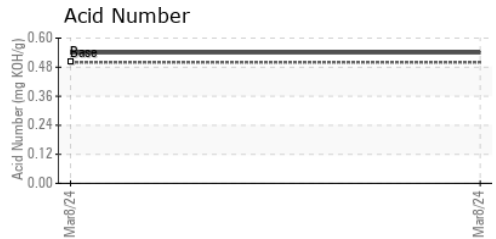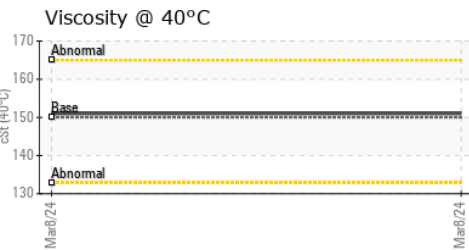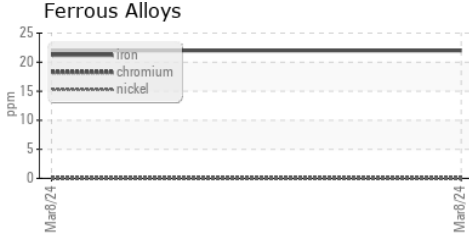

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119620 **Received** : 15 Mar 2024
Lab Number : **06120274** **Tested** : 19 Mar 2024
Unique Number : 10929107 **Diagnosed** : 19 Mar 2024 - Wes Davis
Test Package : IND 2

CERTAINTED CORP
 701 E WASHINGTON ST
 JACKSON, MI
 US 49203

Contact: SIDNEY CHAPPELL
 SIDNEY.A.CHAPPELL@SAINT-GOBAIN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (517)787-8974