


OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

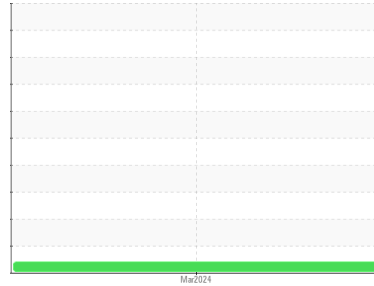

Machine Id
CAT 938K

Component
Rear Differential

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0105143	---	---
Sample Date	Client Info		12 Mar 2024	---	---
Machine Age	hrs	Client Info	22643	---	---
Oil Age	hrs	Client Info	4000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	170	---	---
Chromium	ppm	ASTM D5185m >10	2	---	---
Nickel	ppm	ASTM D5185m >10	4	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m	<1	---	---
Aluminum	ppm	ASTM D5185m >25	2	---	---
Lead	ppm	ASTM D5185m >25	6	---	---
Copper	ppm	ASTM D5185m >100	9	---	---
Tin	ppm	ASTM D5185m >10	2	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 6	19	---	---
Barium	ppm	ASTM D5185m 0	3	---	---
Molybdenum	ppm	ASTM D5185m 0	<1	---	---
Manganese	ppm	ASTM D5185m	3	---	---
Magnesium	ppm	ASTM D5185m 145	15	---	---
Calcium	ppm	ASTM D5185m 3570	3053	---	---
Phosphorus	ppm	ASTM D5185m 1290	1150	---	---
Zinc	ppm	ASTM D5185m 1640	1308	---	---
Sulfur	ppm	ASTM D5185m	10722	---	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	8	---	---
Sodium	ppm	ASTM D5185m	6	---	---
Potassium	ppm	ASTM D5185m >20	2	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.8	1.40	---	---

OIL ANALYSIS REPORT

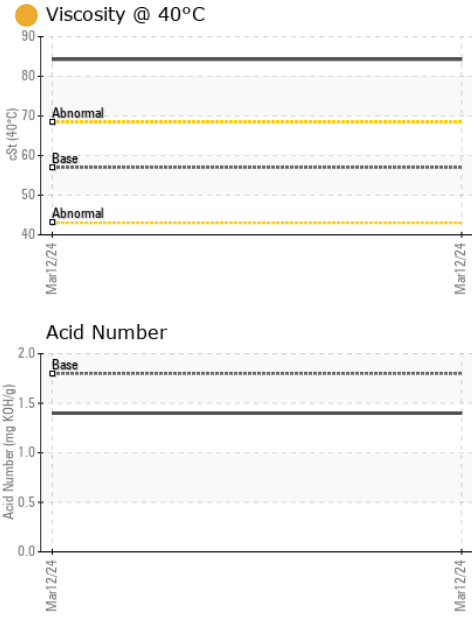


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	● 84.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

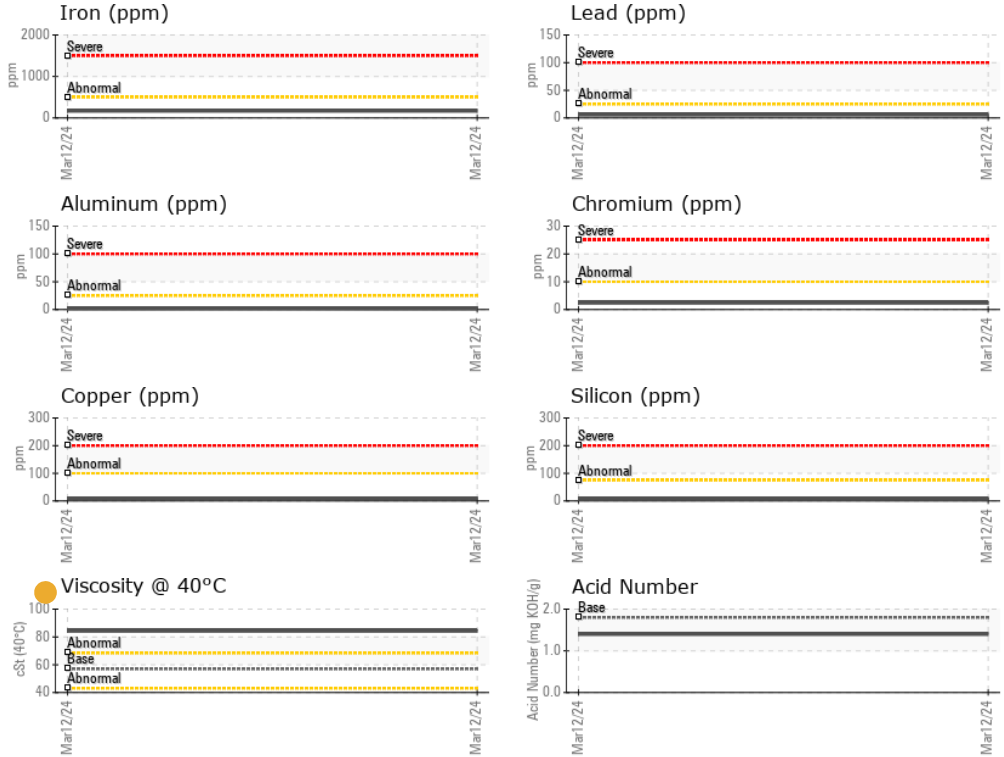

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0105143 **Received** : 15 Mar 2024
Lab Number : 06120284 **Tested** : 18 Mar 2024
Unique Number : 10929117 **Diagnosed** : 19 Mar 2024 - Don Baldrige
Test Package : MOB 2

CENTRAL VALLEY AG
 5707 LANGWORTH
 OAKDALE, CA
 US 95361
 Contact: LAB TECH
 m-labtech@outlook.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: