


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

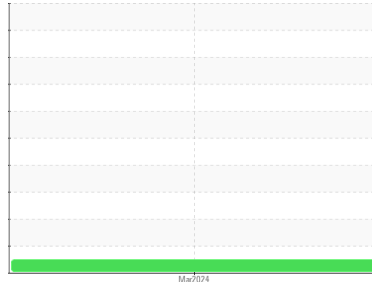

Machine Id  
**CAT 938K**

Component  
**Transmission**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0105145</b>	---	---
Sample Date	Client Info		<b>12 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>22643</b>	---	---
Oil Age	hrs	Client Info	<b>4000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>102</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >50	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >50	<b>15</b>	---	---
Copper	ppm	ASTM D5185m >200	<b>2</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 6	<b>29</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m 0	<b>2</b>	---	---
Manganese	ppm	ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m 145	<b>12</b>	---	---
Calcium	ppm	ASTM D5185m 3570	<b>2109</b>	---	---
Phosphorus	ppm	ASTM D5185m 1290	<b>894</b>	---	---
Zinc	ppm	ASTM D5185m 1640	<b>911</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>5824</b>	---	---




## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>5</b>	---	---
Sodium	ppm	ASTM D5185m	<b>8</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>12</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.8	<b>1.17</b>	---	---

# OIL ANALYSIS REPORT

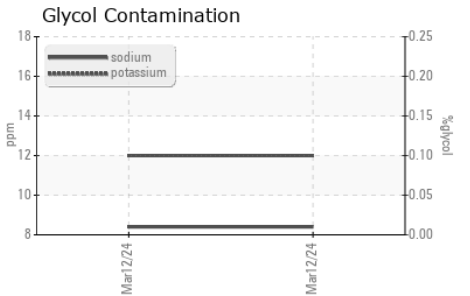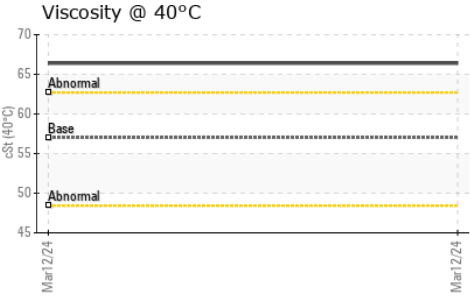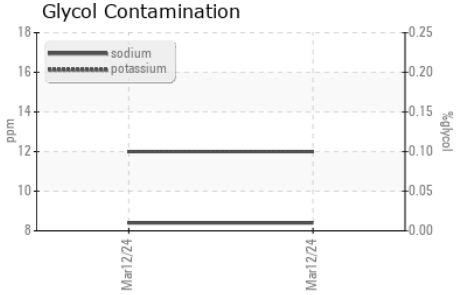









PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	66.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

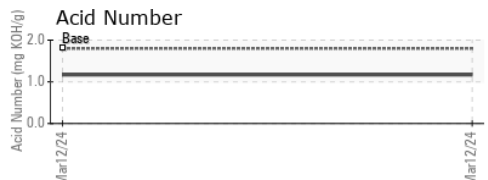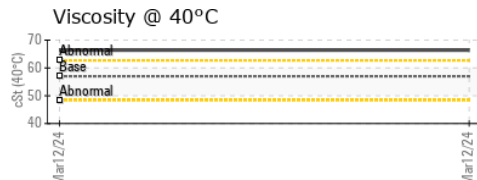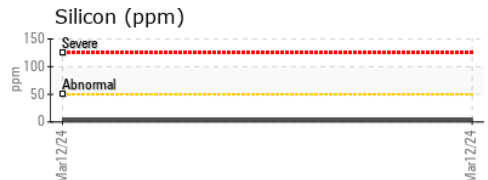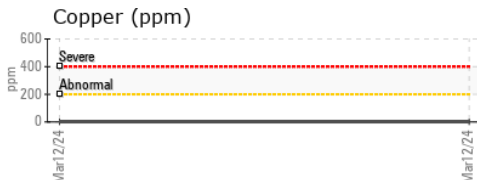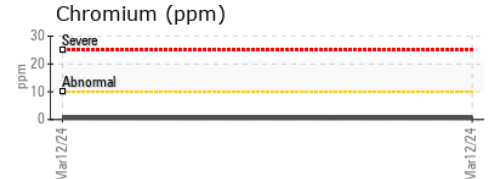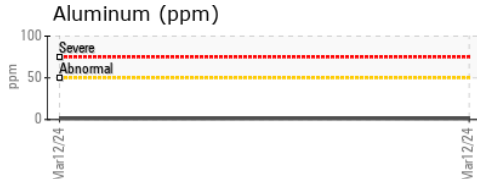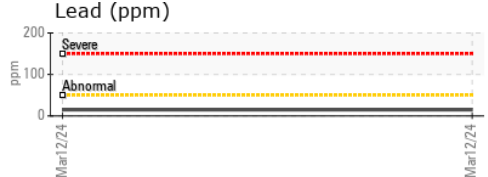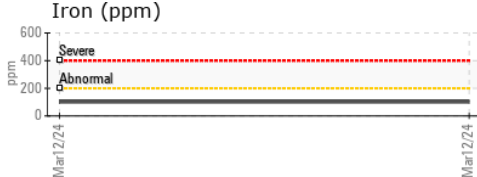

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105145 **Received** : 15 Mar 2024  
**Lab Number** : 06120301 **Tested** : 19 Mar 2024  
**Unique Number** : 10929134 **Diagnosed** : 19 Mar 2024 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: Glycol )

**CENTRAL VALLEY AG**  
 5707 LANGWORTH  
 OAKDALE, CA  
 US 95361  
 Contact: LAB TECH  
 m-labtech@outlook.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: