


# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**

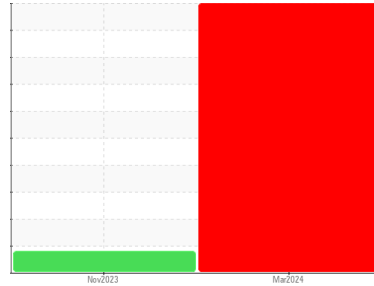

Machine Id  
**648**  
 Component  
**Rear Differential**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

### ▲ Wear

Bearing and/or bushing wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0096402</b>	PCA0096383	---
Sample Date	Client Info		<b>12 Mar 2024</b>	13 Nov 2023	---
Machine Age	hrs	Client Info	<b>20152</b>	19585	---
Oil Age	hrs	Client Info	<b>567</b>	2000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>SEVERE</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>15</b>	16	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	<b>0</b>	2	---
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m >25	<b>▲ 31</b>	<b>▲ 79</b>	---
Copper	ppm	ASTM D5185m >100	<b>▲ 286</b>	32	---
Tin	ppm	ASTM D5185m >10	<b>▲ 26</b>	2	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>87</b>	25	---
Barium	ppm	ASTM D5185m	<b>0</b>	1	---
Molybdenum	ppm	ASTM D5185m	<b>3</b>	7	---
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>61</b>	132	---
Calcium	ppm	ASTM D5185m	<b>2978</b>	2694	---
Phosphorus	ppm	ASTM D5185m	<b>1071</b>	1044	---
Zinc	ppm	ASTM D5185m	<b>1275</b>	1141	---
Sulfur	ppm	ASTM D5185m	<b>3801</b>	3189	---



## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>7</b>	4	---
Sodium	ppm	ASTM D5185m	<b>1</b>	1	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---

# OIL ANALYSIS REPORT







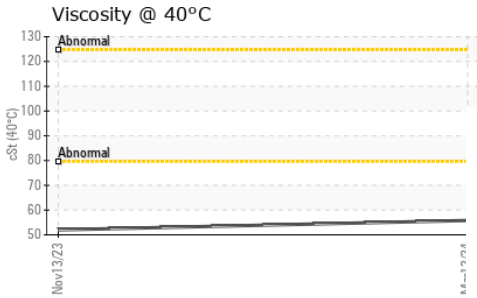
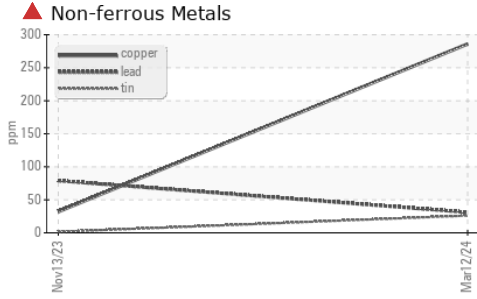


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>55.8</b>	52.0	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

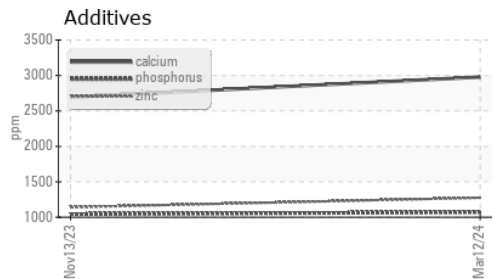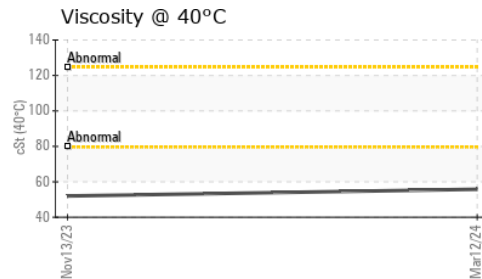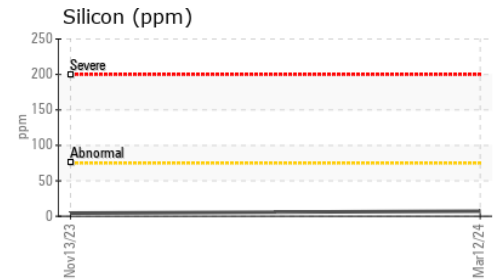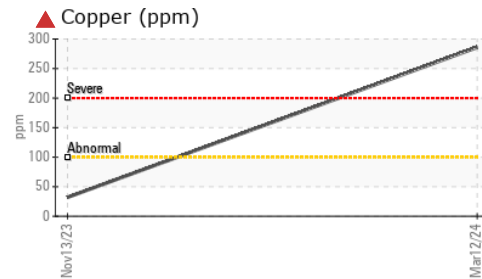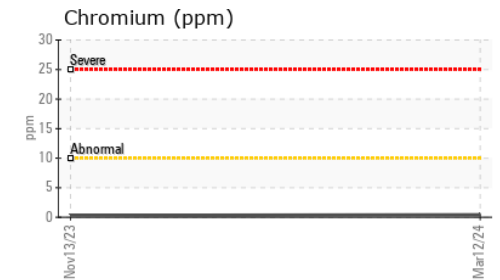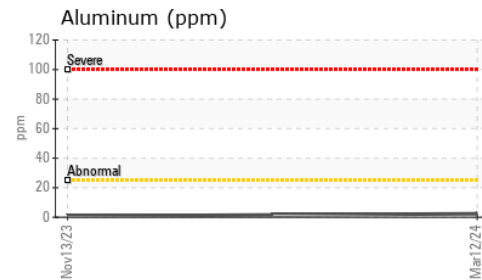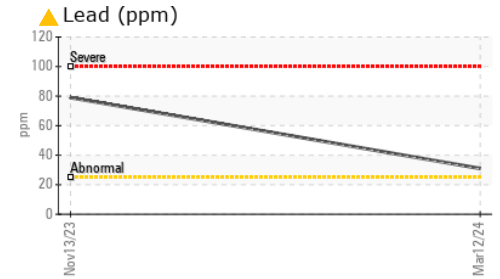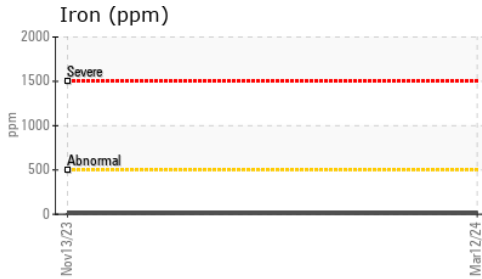

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096402 **Received** : 15 Mar 2024  
**Lab Number** : **06120385** **Tested** : 18 Mar 2024  
**Unique Number** : 10929218 **Diagnosed** : 19 Mar 2024 - Don Baldrige  
**Test Package** : MOB 1

**CENTRAL VALLEY AG**  
 5707 LANGWORTH  
 OAKDALE, CA  
 US 95361  
 Contact: LAB TECH  
 m-labtech@outlook.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: