


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

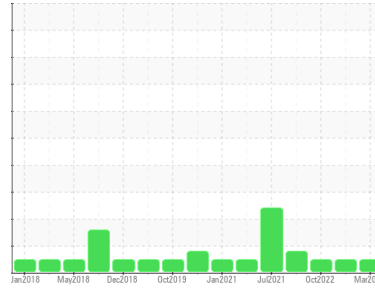

Machine Id  
**KOMATSU WA380-8 30-49 (S/N A74180)**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON XL SYN BLEND 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0095070</b>	PCA0095028	PCA0056846
Sample Date	Client Info		<b>13 Mar 2024</b>	14 Nov 2023	25 Oct 2022
Machine Age	hrs	Client Info	<b>10573</b>	10144	8878
Oil Age	hrs	Client Info	<b>429</b>	700	869
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>17</b>	9	28
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	1	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 1	<b>9</b>	14	4
Barium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	49	63
Manganese	ppm	ASTM D5185m 1	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>790</b>	683	898
Calcium	ppm	ASTM D5185m 1070	<b>1295</b>	1188	1243
Phosphorus	ppm	ASTM D5185m 1150	<b>1028</b>	927	1029
Zinc	ppm	ASTM D5185m 1270	<b>1236</b>	1096	1296
Sulfur	ppm	ASTM D5185m 2060	<b>3584</b>	2752	3612

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.9</b>	0.8	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.3</b>	10.1	13.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	21.0	25.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.7</b>	16.0	20.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.6	<b>7.5</b>	6.9	8.0









# OIL ANALYSIS REPORT

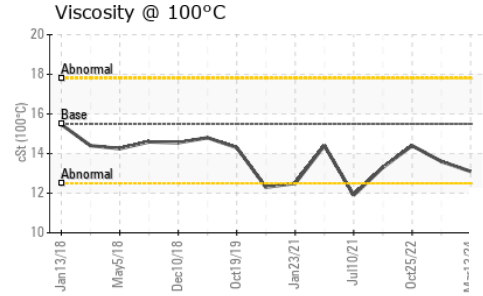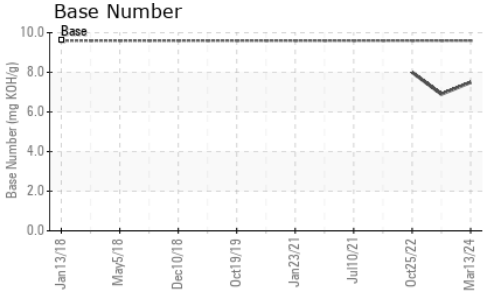

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.1</b>	13.6	14.4

## GRAPHS

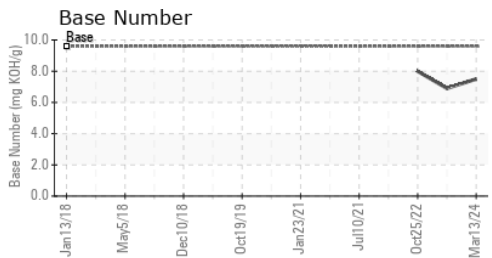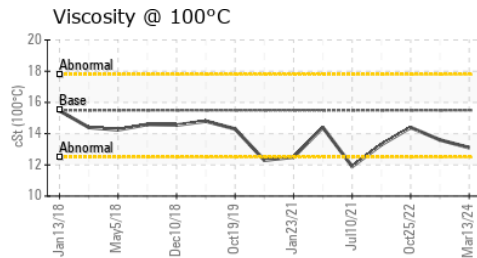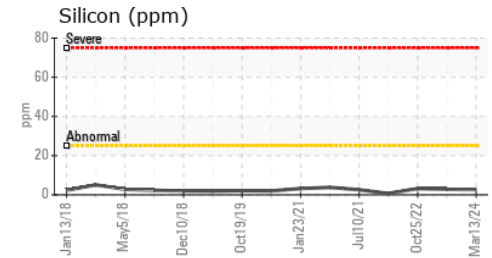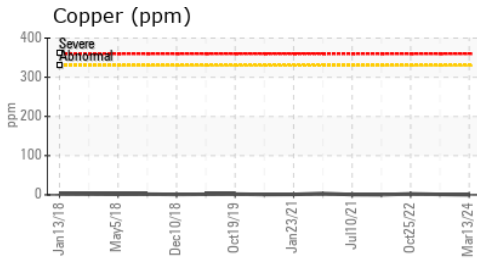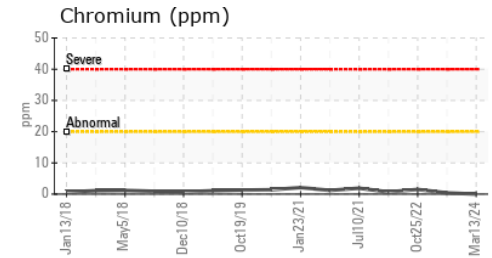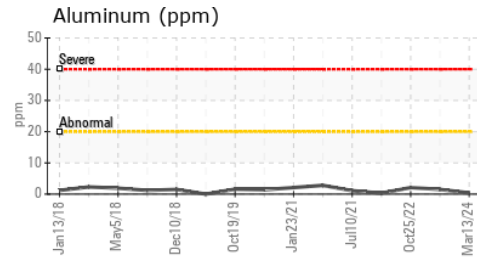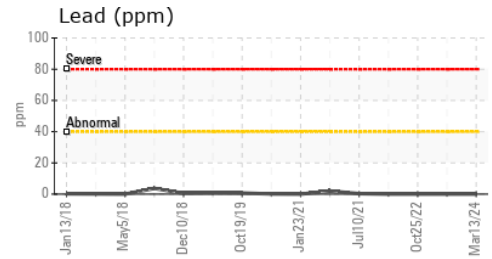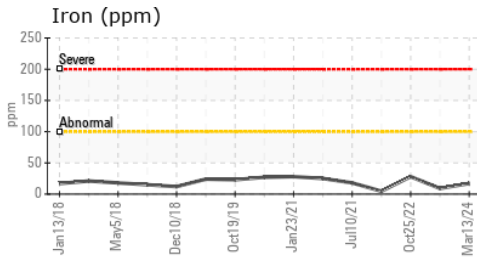

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0095070 **Received** : 18 Mar 2024  
**Lab Number** : **06120509** **Tested** : 19 Mar 2024  
**Unique Number** : 10929342 **Diagnosed** : 19 Mar 2024 - Wes Davis

**JOHNSON DAVIS CONTRACTORS**  
 604 HILBRATH DR  
 LANTANA, FL  
 US 33462  
 Contact: GENE GARDNER  
 ggardner@johnsondavis.com  
 T: (561)588-1170  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)