



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
414122
Component
Diesel Engine
Fluid
{not provided} (--- GAL)



DIAGNOSIS

Recommendation
Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. (Customer Sample Comment: Engine)

Wear
Metal levels are typical for a new component breaking in.

Contamination
Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0112063	---	---
Sample Date	Client Info		12 Mar 2024	---	---
Machine Age	mls Client Info		10428	---	---
Oil Age	mls Client Info		10428	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>100	59	---	---
Chromium	ppm ASTM D5185m	>20	<1	---	---
Nickel	ppm ASTM D5185m	>4	0	---	---
Titanium	ppm ASTM D5185m		0	---	---
Silver	ppm ASTM D5185m	>3	0	---	---
Aluminum	ppm ASTM D5185m	>20	23	---	---
Lead	ppm ASTM D5185m	>40	0	---	---
Copper	ppm ASTM D5185m	>330	14	---	---
Tin	ppm ASTM D5185m	>15	0	---	---
Vanadium	ppm ASTM D5185m		0	---	---
Cadmium	ppm ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		31	---	---
Barium	ppm ASTM D5185m		3	---	---
Molybdenum	ppm ASTM D5185m		19	---	---
Manganese	ppm ASTM D5185m		4	---	---
Magnesium	ppm ASTM D5185m		704	---	---
Calcium	ppm ASTM D5185m		1491	---	---
Phosphorus	ppm ASTM D5185m		750	---	---
Zinc	ppm ASTM D5185m		920	---	---
Sulfur	ppm ASTM D5185m		3268	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	20	---	---
Sodium	ppm ASTM D5185m		3	---	---
Potassium	ppm ASTM D5185m	>20	75	---	---
Fuel	% ASTM D3524	>5	1.9	---	---

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	0.7	---	---
Nitration	Abs/cm *ASTM D7624	>20	10.9	---	---
Sulfation	Abs/.1mm *ASTM D7415	>30	22.1	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	18.6	---	---
Base Number (BN)	mg KOH/g ASTM D2896		6.5	---	---







OIL ANALYSIS REPORT

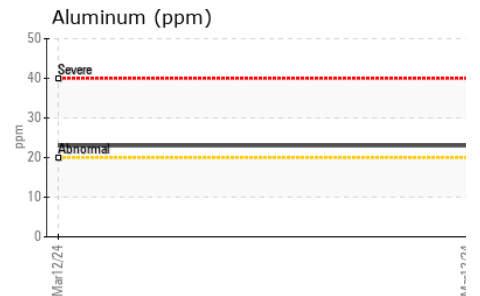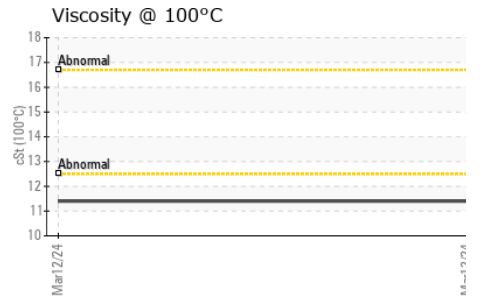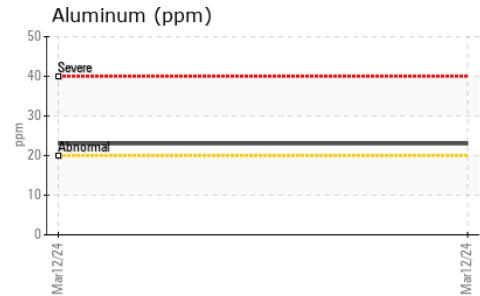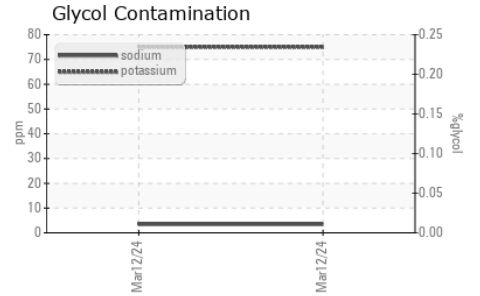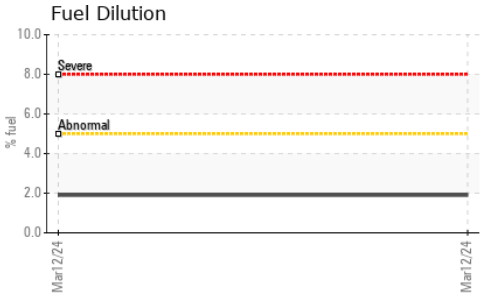

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.4	---	---

GRAPHS

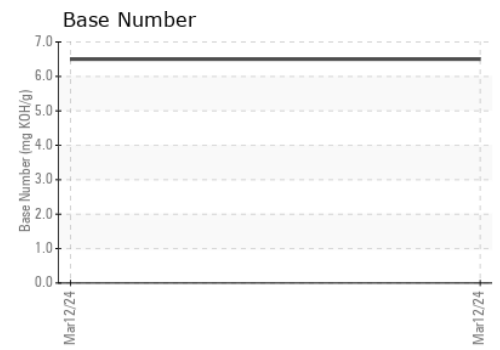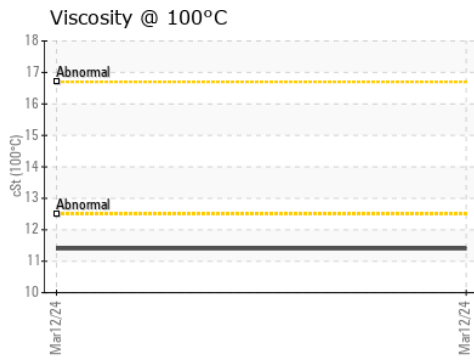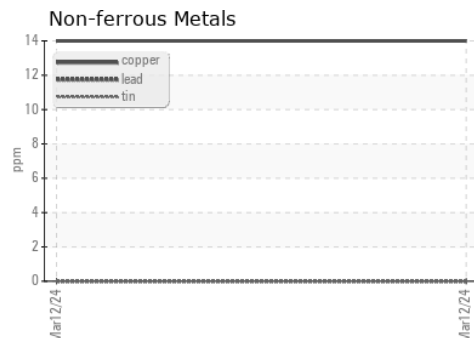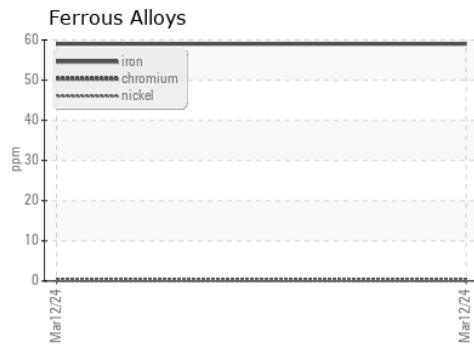

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0112063 **Received** : 18 Mar 2024
Lab Number : 06120553 **Tested** : 20 Mar 2024
Unique Number : 10929386 **Diagnosed** : 20 Mar 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: Adrian Martinez
 adrianmartinez@gflenv.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)