


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

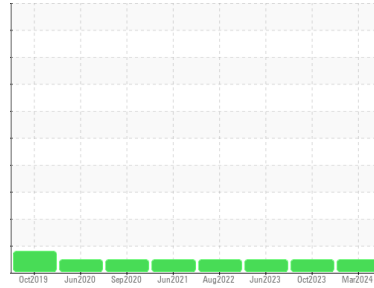

Machine Id  
**309550**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0118993</b>	PCA0108381	PCA0095779	
Sample Date	Client Info	<b>05 Mar 2024</b>	14 Oct 2023	07 Jun 2023	
Machine Age	mls	Client Info	<b>117250</b>	0	10092
Oil Age	mls	Client Info	<b>117250</b>	8792	10092
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>52</b>	24	18
Chromium	ppm ASTM D5185m >20	<b>5</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>38</b>	2	8
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>76</b>	3	1
Lead	ppm ASTM D5185m >40	<b>0</b>	2	2
Copper	ppm ASTM D5185m >330	<b>93</b>	1	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>23</b>	6	9
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>34</b>	62	53
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 950	<b>638</b>	920	847
Calcium	ppm ASTM D5185m 1050	<b>1580</b>	1147	1179
Phosphorus	ppm ASTM D5185m 995	<b>1035</b>	1024	1034
Zinc	ppm ASTM D5185m 1180	<b>1206</b>	1259	1214
Sulfur	ppm ASTM D5185m 2600	<b>3164</b>	3392	3343

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	4	3
Sodium	ppm ASTM D5185m	<b>1</b>	4	4
Potassium	ppm ASTM D5185m >20	<b>166</b>	2	2





## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	1	0.8
Nitration	Abs/cm *ASTM D7624 >20	<b>9.7</b>	10.0	9.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.5</b>	19.5	20.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.5</b>	16.5	17.3
Base Number (BN)	mg KOH/g ASTM D2896	<b>6.1</b>	7.8	8.8









# OIL ANALYSIS REPORT

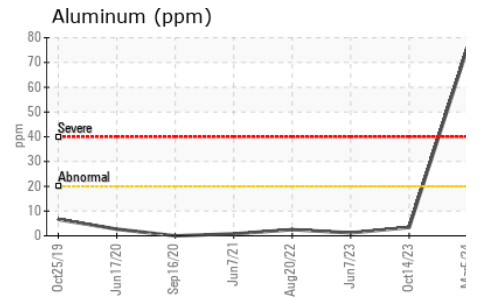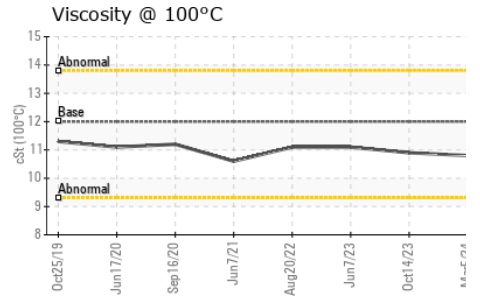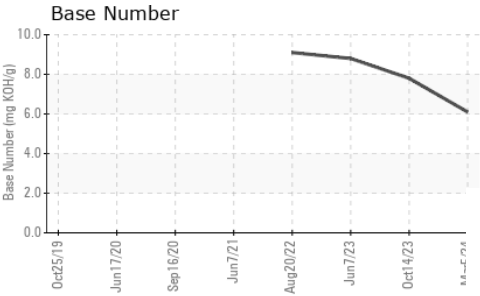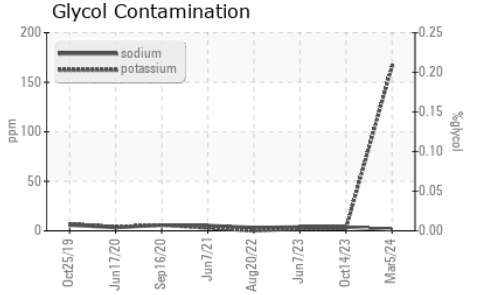

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	10.9

## GRAPHS

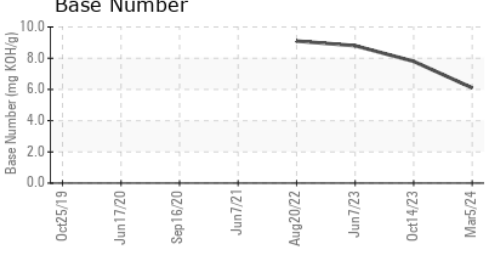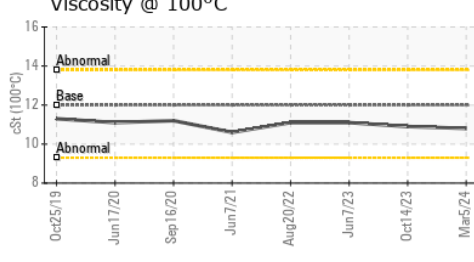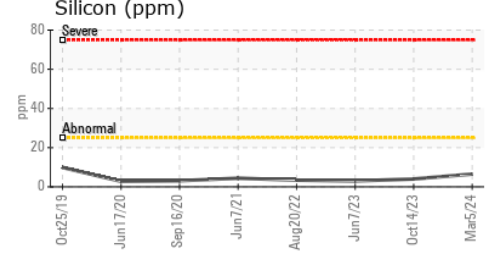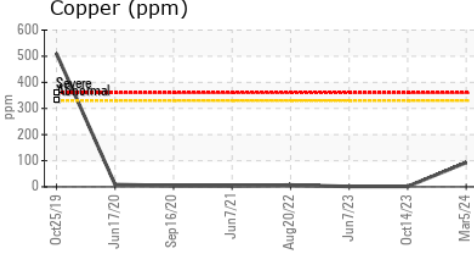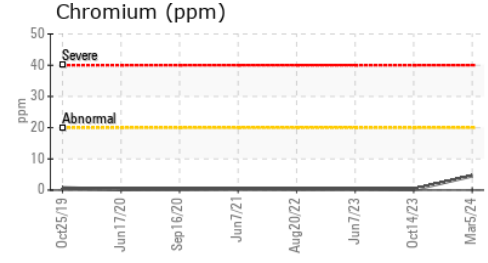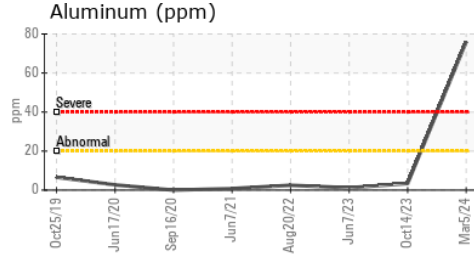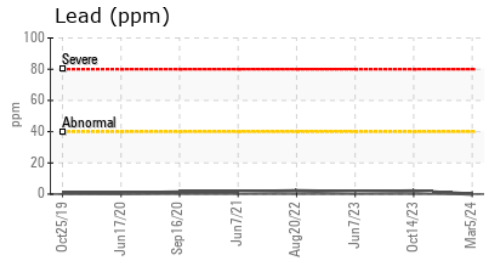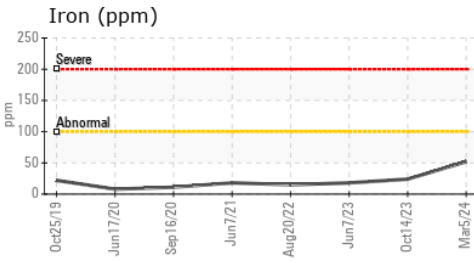

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0118993 **Received** : 18 Mar 2024  
**Lab Number** : 06120611 **Tested** : 19 Mar 2024  
**Unique Number** : 10929444 **Diagnosed** : 20 Mar 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116  
 Contact: ROSTY VITER  
 rviter@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)