




OIL ANALYSIS REPORT

Sample Rating Trend

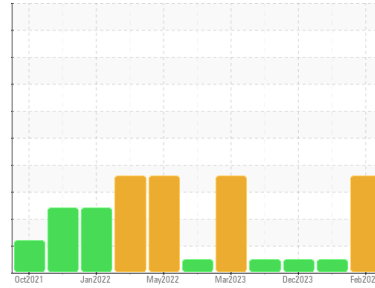

GLYCOL



Area
(F989HW)
Machine Id
720031

Component
Diesel Engine
Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Light fuel dilution occurring.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0098856	GFL0098973	GFL0098945
Sample Date	Client Info	28 Feb 2024	03 Jan 2024	01 Dec 2023
Machine Age	hrs	24844	24741	24702
Oil Age	hrs	24491	24491	24491
Oil Changed	Client Info	Changed	N/A	N/A
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >150	16	8	5
Chromium	ppm	ASTM D5185m >15	<1	0	0
Nickel	ppm	ASTM D5185m >4	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >15	3	3	<1
Lead	ppm	ASTM D5185m >70	4	3	2
Copper	ppm	ASTM D5185m >175	<1	<1	<1
Tin	ppm	ASTM D5185m >5	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	1	0	1
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	72	61	55
Manganese	ppm	ASTM D5185m 0	0	<1	0
Magnesium	ppm	ASTM D5185m 1010	960	920	870
Calcium	ppm	ASTM D5185m 1070	1134	986	1025
Phosphorus	ppm	ASTM D5185m 1150	1165	1021	909
Zinc	ppm	ASTM D5185m 1270	1256	1230	1121
Sulfur	ppm	ASTM D5185m 2060	3452	3130	2745

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	4	2	3
Sodium	ppm	ASTM D5185m	▲ 122	66	52
Potassium	ppm	ASTM D5185m >20	▲ 77	37	28
Fuel	%	ASTM D3524 >3.0	▲ 2.0	1.7	<1.0
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.4	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	6.3	5.3	5.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.4	17.6	17.5


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.7	13.2	13.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.9	9.2	9.1




OIL ANALYSIS REPORT


Fuel Dilution

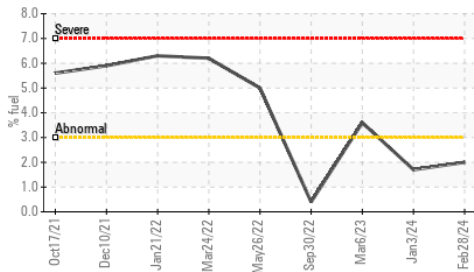


Glycol Contamination

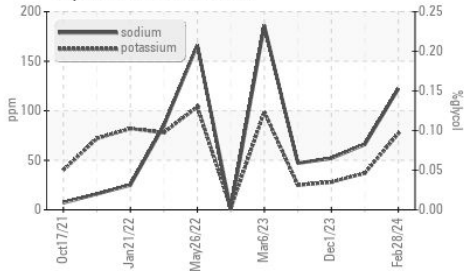

Base Number

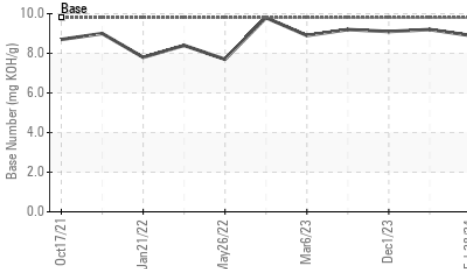

Glycol Contamination

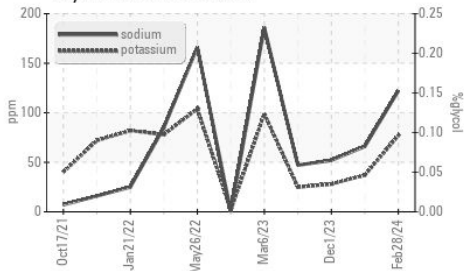


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	11.7	12.3

GRAPHS


Ferrous Alloys

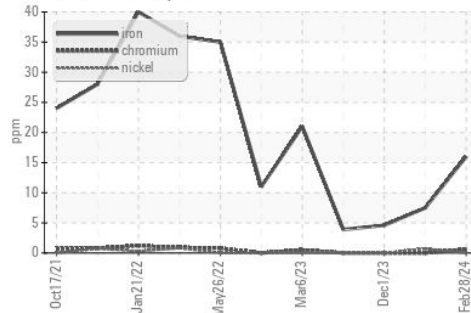


Non-ferrous Metals

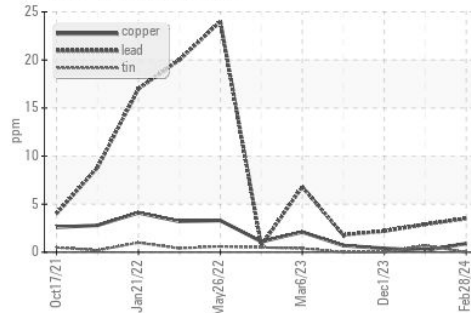

Viscosity @ 100°C

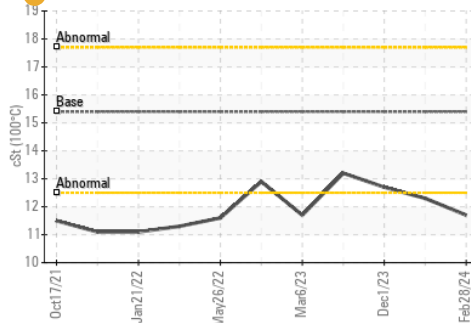

Base Number

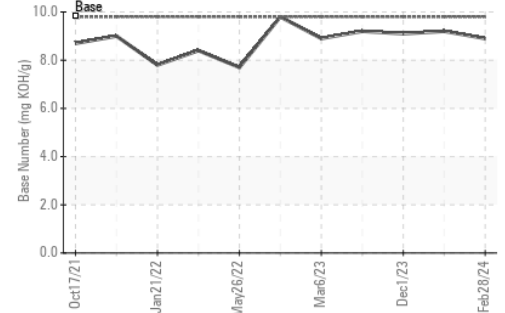

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0098856 Received : 18 Mar 2024
 Lab Number : 06120651 Tested : 20 Mar 2024
 Unique Number : 10929484 Diagnosed : 20 Mar 2024 - Jonathan Hester
 Test Package : FLEET (Additional Tests: FuelDilution, Glycol, PercentFuel)

GFL Environmental - 084 - Clarksville
 699 Jack Miller Boulevard
 Clarksville, TN
 US 37042
 Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com
 T: (931)552-7276
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)