


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

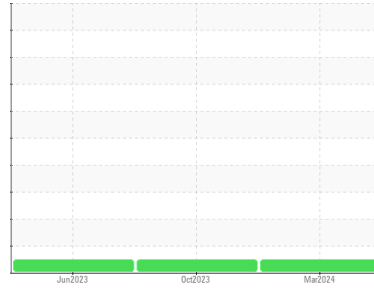

Area  
**(AU756S) Supermarket - Tractor**  
Machine Id  
**FREIGHTLINER 107A8814**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116981</b>	PCA0104072	PCA0099862
Sample Date	Client Info		<b>13 Mar 2024</b>	20 Oct 2023	24 Jun 2023
Machine Age	mls	Client Info	<b>203591</b>	189572	174722
Oil Age	mls	Client Info	<b>14019</b>	14850	6663
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>11</b>	16	7
Chromium	ppm	ASTM D5185m >5	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>6</b>	8	5
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>4</b>	7	5
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>5</b>	3	9
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m 50	<b>69</b>	62	67
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>970</b>	875	885
Calcium	ppm	ASTM D5185m 1050	<b>1176</b>	1045	1136
Phosphorus	ppm	ASTM D5185m 995	<b>1072</b>	879	1012
Zinc	ppm	ASTM D5185m 1180	<b>1277</b>	1149	1223
Sulfur	ppm	ASTM D5185m 2600	<b>3246</b>	2373	3266

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>6</b>	7	4
Sodium	ppm	ASTM D5185m	<b>2</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>3</b>	9	4



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.8	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	8.3	6.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	20.2	18.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.6</b>	15.7	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.2</b>	6.7	9.3





# OIL ANALYSIS REPORT

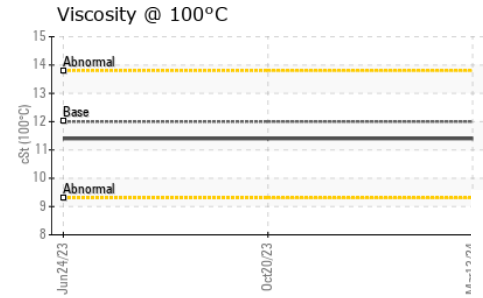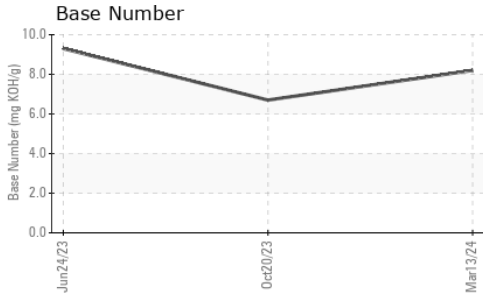

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.4

## GRAPHS

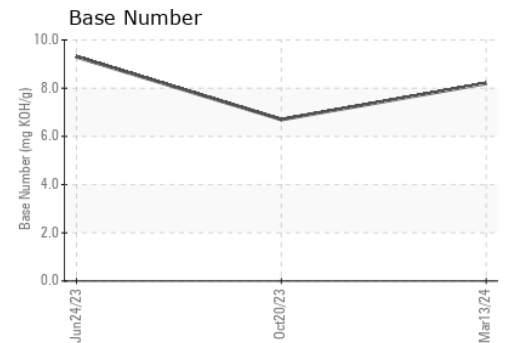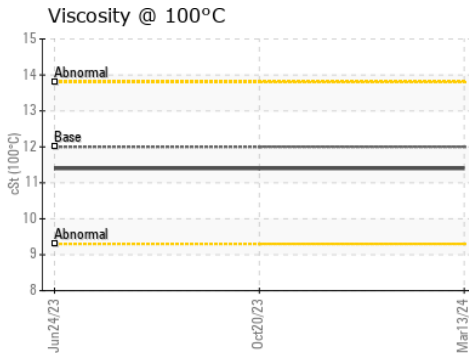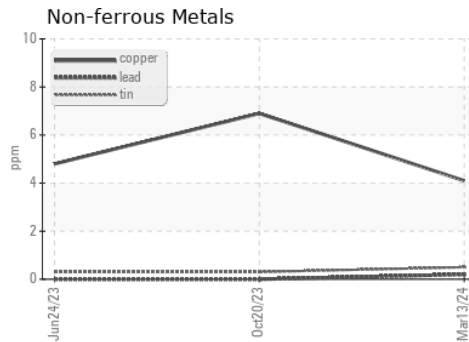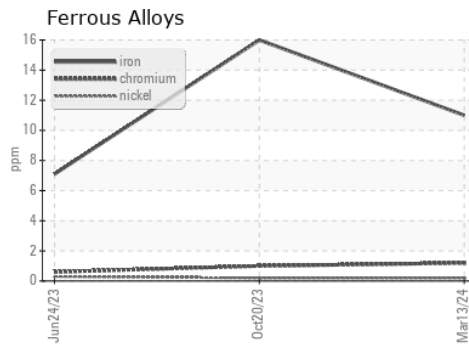

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116981  
**Lab Number** : 06120713  
**Unique Number** : 10929546  
**Test Package** : FLEET

**Received** : 18 Mar 2024  
**Tested** : 19 Mar 2024  
**Diagnosed** : 19 Mar 2024 - Wes Davis

**Transervice - Shop 1071 - Supermarket-Dayton**  
 60 A Tower Road  
 Dayton, NJ  
 US 08810  
 Contact: Brian Quinn  
 bquinn@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: