


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

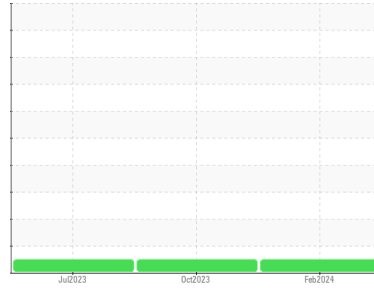

Area  
**(AU701W) Supermarket - Tractor**  
Machine Id  
**FREIGHTLINER 107A1885**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116961</b>	PCA0104074	PCA0099840
Sample Date	Client Info		<b>23 Feb 2024</b>	24 Oct 2023	06 Jul 2023
Machine Age	mls	Client Info	<b>197118</b>	188540	178040
Oil Age	mls	Client Info	<b>8578</b>	10500	9768
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>80	<b>10</b>	20	10
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>5</b>	4	4
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>5</b>	9	5
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	2	<b>7</b>	4	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m	50	<b>69</b>	69	66
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>979</b>	898	934
Calcium	ppm	ASTM D5185m	1050	<b>1179</b>	1076	1122
Phosphorus	ppm	ASTM D5185m	995	<b>1083</b>	951	1030
Zinc	ppm	ASTM D5185m	1180	<b>1283</b>	1180	1263
Sulfur	ppm	ASTM D5185m	2600	<b>3430</b>	2940	3686

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	6	4
Sodium	ppm	ASTM D5185m		<b>2</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	5	3



## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.5</b>	8.6	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.1</b>	20.2	18.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	16.3	14.0
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.8</b>	6.8	8.5





# OIL ANALYSIS REPORT

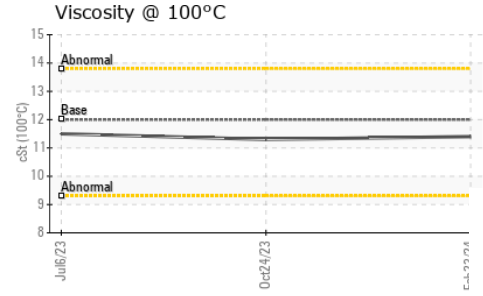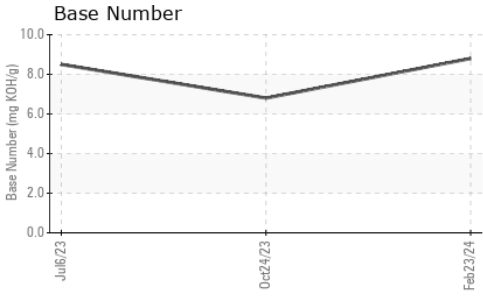

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.4</b>	11.3	11.5

## GRAPHS

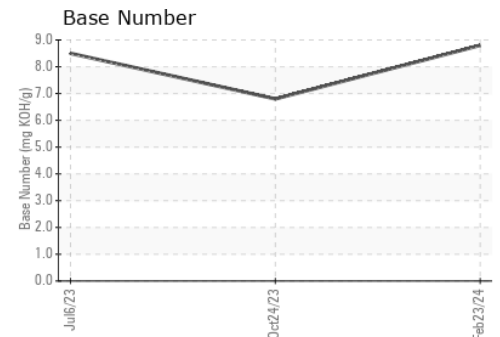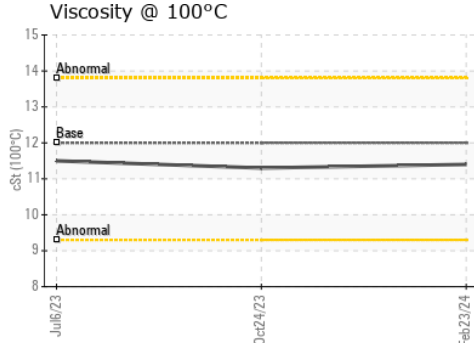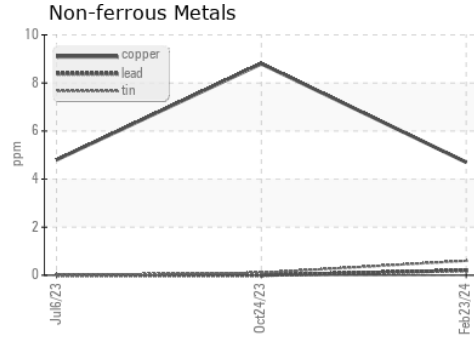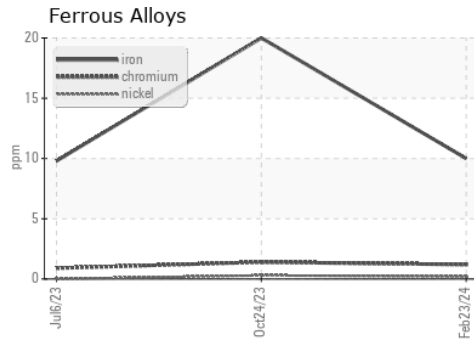

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116961      **Received** : 18 Mar 2024  
**Lab Number** : **06120718**      **Tested** : 19 Mar 2024  
**Unique Number** : 10929551      **Diagnosed** : 19 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1071 - Supermarket-Dayton**  
 60 A Tower Road  
 Dayton, NJ  
 US 08810  
 Contact: Brian Quinn  
 bquinn@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: