


OIL ANALYSIS REPORT

Sample Rating Trend







TG LUBE OIL

Component

Gearbox

PETRO CANADA TURBOFLO XL32 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


L)		Nov2022	Feb2023 May2023	0ct2023 Dec2023	Mar2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0083664	PCA0083627	PCA0083679
Sample Date		Client Info		17 Mar 2024	18 Dec 2023	03 Oct 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATI	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	0	0	<1
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	2
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	0	<1
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm		0	<1	<1	0
Magnesium	ppm	ASTM D5185m	0	0	0	<1
Calcium	ppm	ASTM D5185m	0	0	0	<1
Phosphorus						
Zinc	ppm	ASTM D5185m	5	14	464	437
	ppm	ASTM D5185m	0	7	464 <1	437 6
Sulfur	ppm	ASTM D5185m ASTM D5185m	0 750	7 901	464 <1 764	437 6 852
CONTAMINAN	ppm ppm	ASTM D5185m ASTM D5185m method	0 750 limit/base	7 901 current	464 <1 764 history1	437 6 852 history2
CONTAMINAN Silicon	ppm ppm TS ppm	ASTM D5185m ASTM D5185m method ASTM D5185m	0 750	7 901 current <1	464 <1 764 history1	437 6 852 history2
CONTAMINAN Silicon Sodium	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	0 750 limit/base >50	7 901 current <1 2	464 <1 764 history1 <1	437 6 852 history2 <1 <1
CONTAMINAN Silicon Sodium Potassium	ppm ppm TS ppm ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	0 750 limit/base >50 >20	7 901 current <1 2 0	464 <1 764 history1 <1 <1	437 6 852 history2 <1 <1 <1
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m method	0 750 limit/base >50 >20 limit/base	7 901 current <1 2 0	464 <1 764 history1 <1 <1 0 history1	437 6 852 history2 <1 <1 <1 history2
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647	0 750 limit/base >50 >20 limit/base >20000	7 901 current <1 2 0 current 5227	464 <1 764 history1 <1 <1 0 history1 276	437 6 852 history2 <1 <1 <1 <1 1 1018
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647	0 750 limit/base >50 >20 limit/base >20000 >5000	7 901 current <1 2 0 current 5227 1854	464 <1 764 history1 <1 <1 0 history1 276 52	437 6 852 history2 <1 <1 <1 1 history2 1018 99
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	0 750 limit/base >50 >20 limit/base >20000 >5000 >640	7 901 current <1 2 0 current 5227 1854 217	464 <1 764 history1 <1 <1 0 history1 276 52 4	437 6 852 history2 <1 <1 <1 1 history2 1018 99 5
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	0 750 limit/base >50 >20 limit/base >20000 >5000 >640 >160	7 901 current <1 2 0 current 5227 1854 217 61	464 <1 764 history1 <1 <1 0 history1 276 52 4	437 6 852 history2 <1 <1 <1 1 history2 1018 99 5
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	0 750 limit/base >50 >20 limit/base >20000 >5000 >640 >160 >40	7 901 current <1 2 0 current 5227 1854 217 61 1	464 <1 764 history1 <1 <1 0 history1 276 52 4 1 0	437 6 852 history2 <1 <1 <1 <1 history2 1018 99 5 2
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	0 750 limit/base >50 >20 limit/base >20000 >5000 >640 >160 >40	7 901 current <1 2 0 current 5227 1854 217 61	464 <1 764 history1 <1 <1 0 history1 276 52 4	437 6 852 history2 <1 <1 <1 1 <1 99 5 5 2
CONTAMINAN Silicon Sodium Potassium FLUID CLEANL Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm TS ppm ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647	0 750 limit/base >50 >20 limit/base >20000 >5000 >640 >160 >40 >10	7 901 current <1 2 0 current 5227 1854 217 61 1	464 <1 764 history1 <1 <1 0 history1 276 52 4 1 0 0	437 6 852 history2 <1 <1 <1 <1 1018 99 5 2 0




OIL ANALYSIS REPORT










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

I LOID I NOI	LITTILO	method			HISTOLAL	Thought A
Visc @ 40°C	cSt	ASTM D445	33.86	34.2	34.2	33.8

SAMPLE IMAGES	method	
Color		



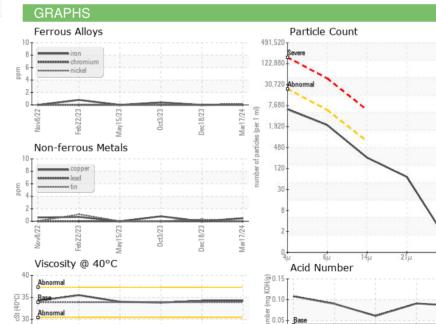





Laboratory Sample No. Lab Number : 06120827

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0083664

Bottom

Unique Number : 10929660

Received : 18 Mar 2024 **Tested**

Diagnosed

Dec18/23 -

: 19 Mar 2024

Mar17/24 -

: 19 Mar 2024 - Wes Davis

흍 0.05

WHEELABRATOR 100 SALEM TURNPIKE SAUGUS, MA

US 01906 Contact:

Test Package: IND 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (518)312-1460

F: