


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

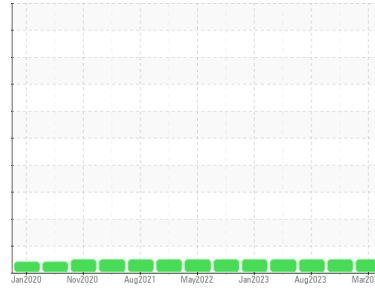

Area  
**600HP**  
Machine Id  
**217422 [600HP]**

Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 10W30 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0101237</b>	PCA0101262	PCA0101250
Sample Date	Client Info			<b>02 Mar 2024</b>	26 Oct 2023	14 Aug 2023
Machine Age	mls Client Info			<b>670190</b>	634692	606508
Oil Age	mls Client Info			<b>0</b>	30000	30000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>20</b>	15	22
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>10</b>	4	7
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>30	<b>6</b>	7	10
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>13</b>	<1	0
Barium	ppm	ASTM D5185m	10	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m	100	<b>68</b>	63	69
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>924</b>	917	1220
Calcium	ppm	ASTM D5185m	3000	<b>1141</b>	1061	1340
Phosphorus	ppm	ASTM D5185m	1150	<b>1019</b>	920	1170
Zinc	ppm	ASTM D5185m	1350	<b>1267</b>	1236	1515
Sulfur	ppm	ASTM D5185m	4250	<b>2915</b>	2729	3574

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>6</b>	5	13
Sodium	ppm	ASTM D5185m		<b>2</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	5	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.4</b>	8.4	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.8</b>	20.1	19.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.7</b>	16.4	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.4</b>	7.0	7.1





# OIL ANALYSIS REPORT

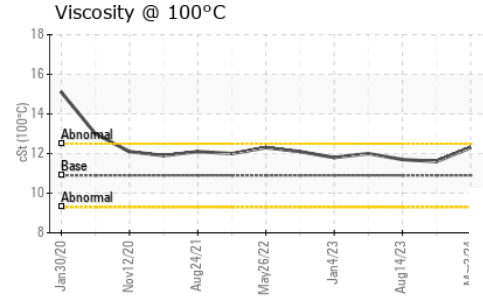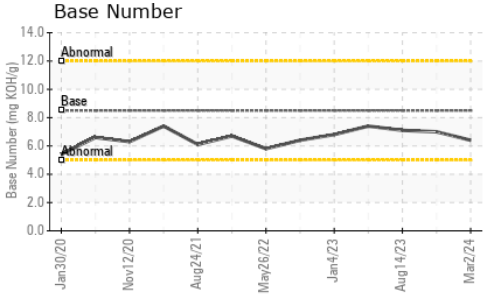

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>12.3</b>	11.6	11.7

## GRAPHS

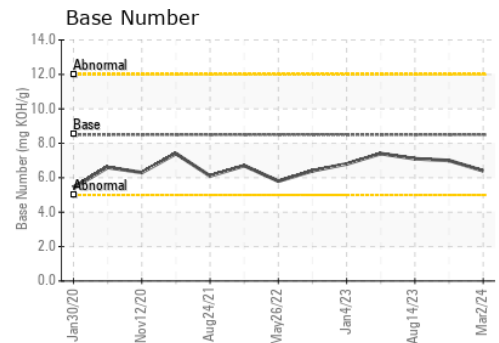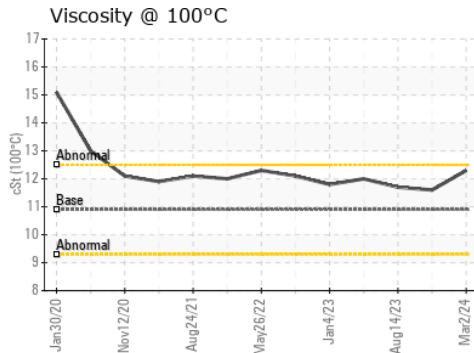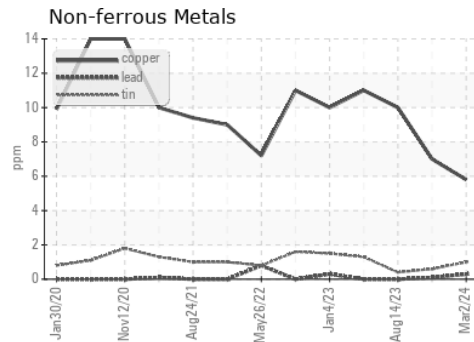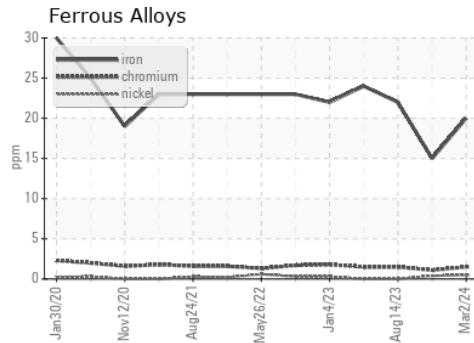

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101237  
**Lab Number** : **06121356**  
**Unique Number** : 10930189  
**Test Package** : FLEET  
**Received** : 18 Mar 2024  
**Tested** : 19 Mar 2024  
**Diagnosed** : 19 Mar 2024 - Wes Davis

**McLane Company - High Plains - 600HP**  
 1717 East Loop 289  
 LUBBOCK, TX  
 US 79403  
 Contact: RITA GARCIA  
 rita.garcia@mcclaneco.com  
 T: (806)766-2902  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)