


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

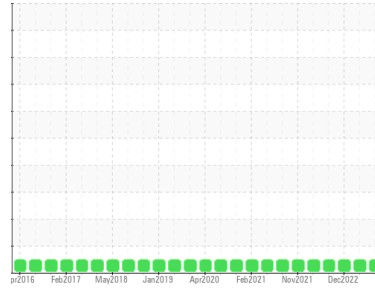

Area  
**KEMP QUARRIES / PRYOR STONE [64441]**  
 Machine Id  
**WL103**  
 Component  
**Rear Differential**  
 Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Pm4 performed. All oil samples taken. Engine oil, transmission oil, and all filters changed. )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0086593</b>	PCA0084386	PCA0070286
Sample Date	Client Info		<b>23 Feb 2024</b>	02 Dec 2023	05 Dec 2022
Machine Age	hrs	Client Info	<b>40226</b>	39780	39249
Oil Age	hrs	Client Info	<b>977</b>	531	2150
Oil Changed	Client Info		<b>Oil Added</b>	Oil Added	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>7</b>	3	5
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	3	<1
Lead	ppm	ASTM D5185m >25	<b>2</b>	<1	<1
Copper	ppm	ASTM D5185m >100	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	8	0
Molybdenum	ppm	ASTM D5185m 0	<b>1</b>	2	<1
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 9	<b>16</b>	17	14
Calcium	ppm	ASTM D5185m 3114	<b>3102</b>	3287	2399
Phosphorus	ppm	ASTM D5185m 1099	<b>865</b>	934	832
Zinc	ppm	ASTM D5185m 1245	<b>1038</b>	1054	867
Sulfur	ppm	ASTM D5185m 7086	<b>6846</b>	9015	8387


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>13</b>	15	7
Sodium	ppm	ASTM D5185m	<b>0</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	0

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








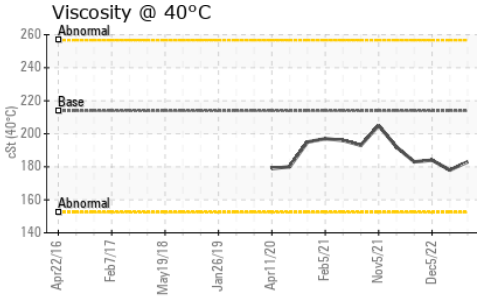


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	213.9	<b>183</b>	178	184

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

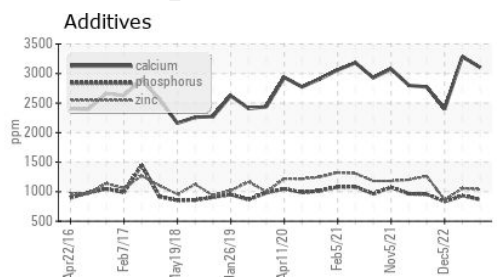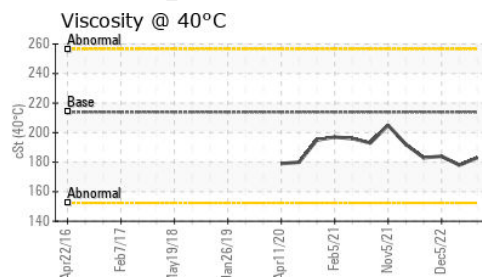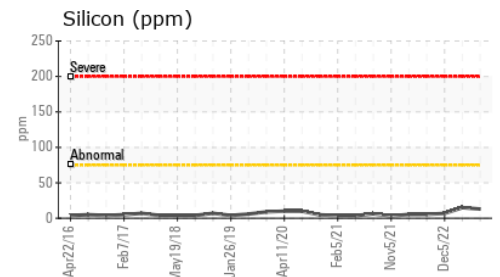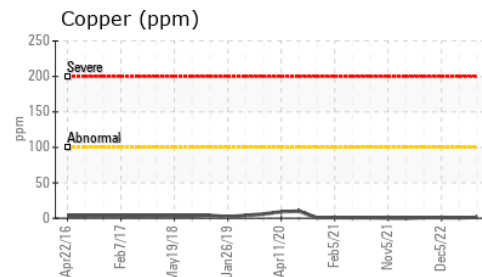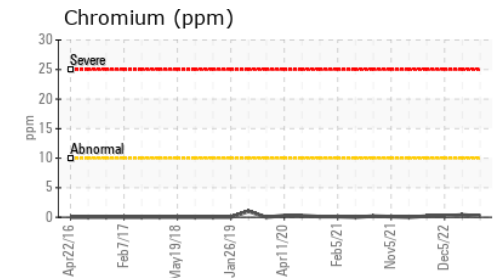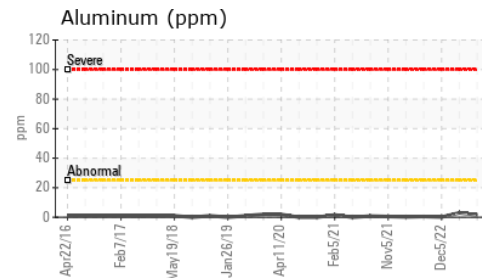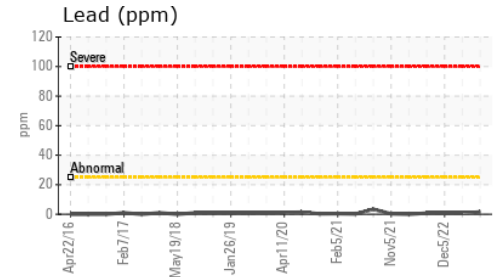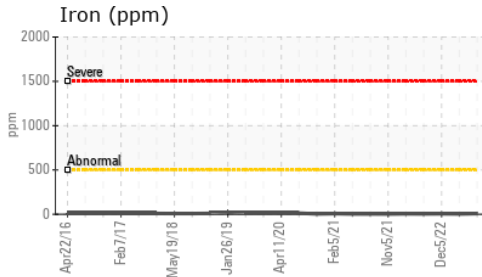

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086593  
**Lab Number** : 06121830  
**Unique Number** : 10935981  
**Test Package** : MOB 1

**Received** : 18 Mar 2024  
**Tested** : 19 Mar 2024  
**Diagnosed** : 21 Mar 2024 - Jonathan Hester

**Kemp Quarries - Pryor Stone - Pryor**  
 1050 E 520 Rd  
 Pryor, OK  
 US 74361

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: [pryor@pryorstone.com](mailto:pryor@pryorstone.com)

T:

F: