


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

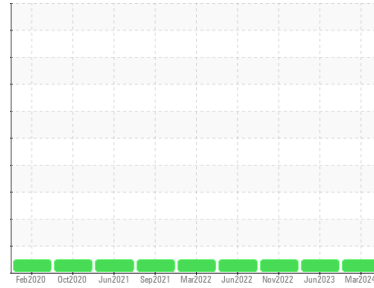

Machine Id
583
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0082728	PCA0069608	PCA0069257
Sample Date	Client Info	06 Mar 2024	15 Jun 2023	04 Nov 2022
Machine Age	hrs	Client Info	5833	2463
Oil Age	hrs	Client Info	274	2463
Oil Changed	Client Info	Not Chngd	Not Chngd	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	20	17	12
Chromium	ppm ASTM D5185m >20	1	1	1
Nickel	ppm ASTM D5185m >4	<1	0	<1
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	4	7	5
Lead	ppm ASTM D5185m >40	2	0	2
Copper	ppm ASTM D5185m >330	15	1	2
Tin	ppm ASTM D5185m >15	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	4	3	5
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	63	67	62
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m 450	977	1085	1030
Calcium	ppm ASTM D5185m 3000	1114	1198	1248
Phosphorus	ppm ASTM D5185m 1150	1051	1148	1032
Zinc	ppm ASTM D5185m 1350	1278	1405	1404
Sulfur	ppm ASTM D5185m 4250	3097	3967	3788

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	9	6	7
Sodium	ppm ASTM D5185m >158	<1	2	1
Potassium	ppm ASTM D5185m >20	12	12	9



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.5	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	9.7	8.0	8.4
Sulfation	Abs/.1mm *ASTM D7415 >30	21.0	19.8	20.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.6	16.1	16.6
Base Number (BN)	mg KOH/g ASTM D2896 8.5	7.1	8.3	8.1





OIL ANALYSIS REPORT

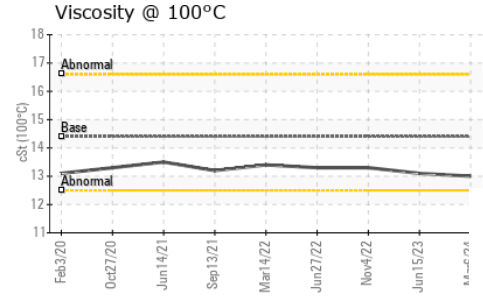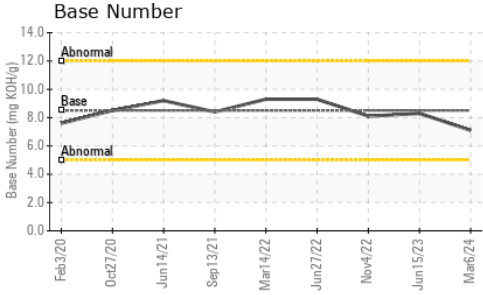

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	13.1	13.3

GRAPHS

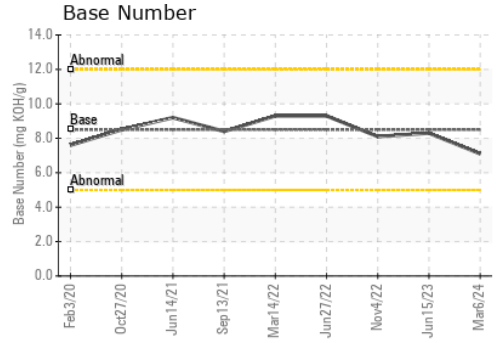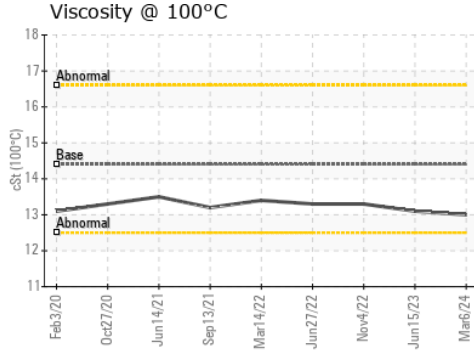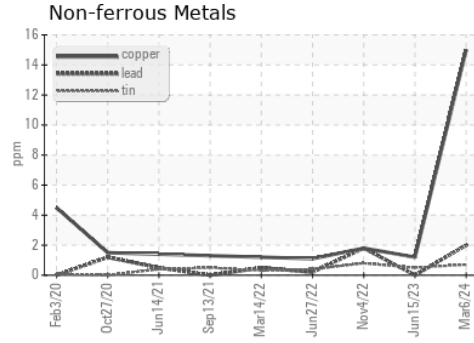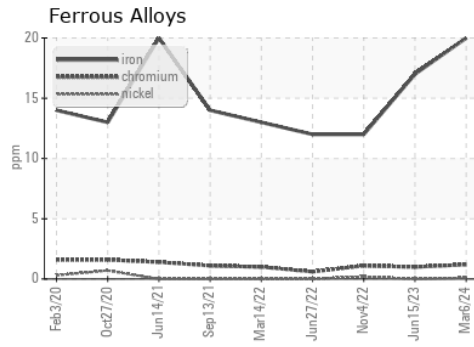

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0082728
Lab Number : **06121919**
Unique Number : 10936070
Test Package : FLEET
Received : 19 Mar 2024
Tested : 19 Mar 2024
Diagnosed : 19 Mar 2024 - Wes Davis

AVR - APPLE VALLEY READY MIX
 14698 GALAXY AVE
 APPLE VALLEY, MN
 US 55124
 Contact: senia zimmer
 avrconcrete.senia@gmail.com
 T: (952)953-2992
 F: (952)953-2994

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)