




OIL ANALYSIS REPORT

Sample Rating Trend

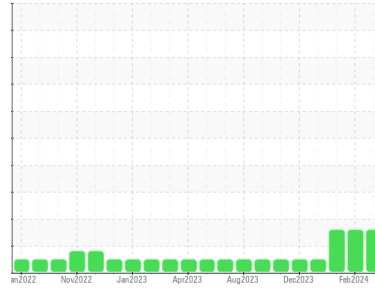

DIRT



Machine Id
223030-1

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor. Note that there appears to be a discrepancy in the total time on this component, when compared to the historical data.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0110556	GFL0110593	GFL0110559	
Sample Date	Client Info	14 Mar 2024	27 Feb 2024	15 Feb 2024	
Machine Age	hrs	Client Info	1117	478529	475877
Oil Age	hrs	Client Info	400	0	465379
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed	
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	47	42	35
Chromium	ppm ASTM D5185m >5	0	2	<1
Nickel	ppm ASTM D5185m >2	0	<1	0
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	<1	2	<1
Lead	ppm ASTM D5185m >30	0	<1	<1
Copper	ppm ASTM D5185m >150	2	1	<1
Tin	ppm ASTM D5185m >5	0	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	3	4	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	63	67	64
Manganese	ppm ASTM D5185m 0	0	<1	<1
Magnesium	ppm ASTM D5185m 1010	991	945	910
Calcium	ppm ASTM D5185m 1070	1106	1040	1024
Phosphorus	ppm ASTM D5185m 1150	1043	1048	992
Zinc	ppm ASTM D5185m 1270	1200	1228	1146
Sulfur	ppm ASTM D5185m 2060	3417	3029	2866

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	▲ 48	▲ 46	▲ 38
Sodium	ppm ASTM D5185m	<1	1	2
Potassium	ppm ASTM D5185m >20	0	2	0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	2.9	2.4	2.2
Nitration	Abs/cm *ASTM D7624 >20	10.3	9.6	8.8
Sulfation	Abs/.1mm *ASTM D7415 >30	24.4	24.5	22.6


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.2	16.2	15.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.4	9.0	9.7




OIL ANALYSIS REPORT


▲ Silicon (ppm)

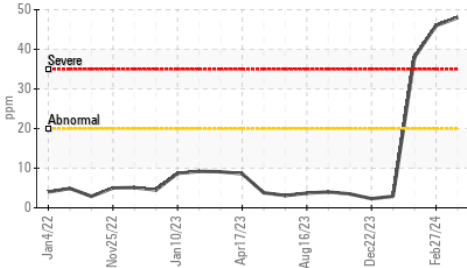

Base Number

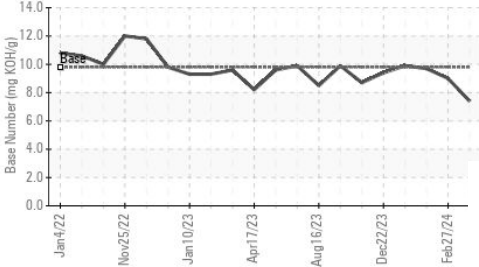

Viscosity @ 100°C

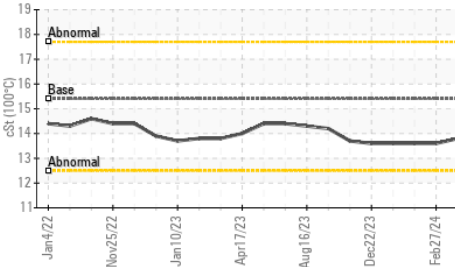


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.6

GRAPHS


Ferrous Alloys

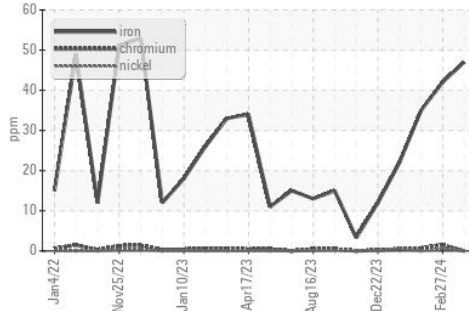


Non-ferrous Metals

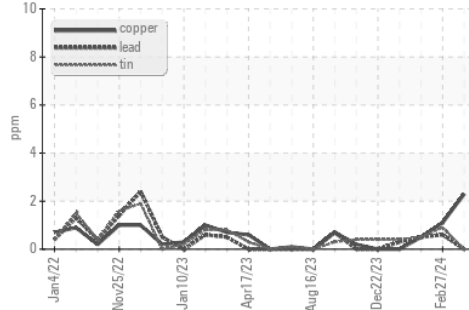

Viscosity @ 100°C

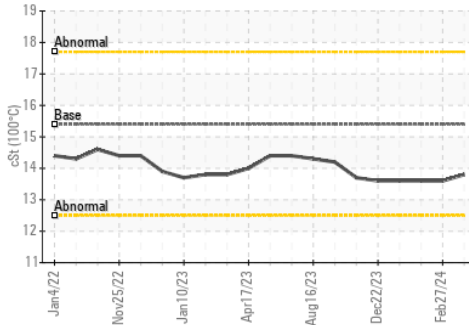

Base Number

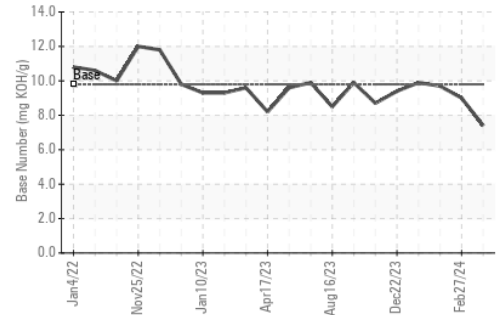

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0110556

Lab Number : 06122024

Unique Number : 10936175

Test Package : FLEET

Received : 19 Mar 2024

Tested : 19 Mar 2024

Diagnosed : 21 Mar 2024 - Don Baldrige

GFL Environmental - 166 - Phenix City

18 Old Brickyard Rd

Phenix City, AL

US 36869

Contact: DEAN PEACE JR

dean.peace@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)