



# OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id  
**714041**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### ● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0114329</b>	---	---
Sample Date	Client Info		<b>15 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>331</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>21</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>3</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>90</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>324</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 60	<b>118</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m 1010	<b>697</b>	---	---
Calcium	ppm	ASTM D5185m 1070	<b>1344</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>720</b>	---	---
Zinc	ppm	ASTM D5185m 1270	<b>881</b>	---	---
Sulfur	ppm	ASTM D5185m 2060	<b>2609</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>▲ 79</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>9</b>	---	---
Fuel	%	ASTM D3524 >3.0	<b>0.4</b>	---	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.8</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.6</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	---	---







# OIL ANALYSIS REPORT

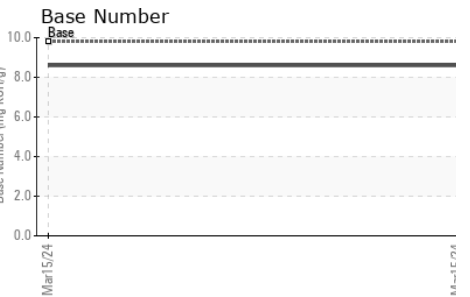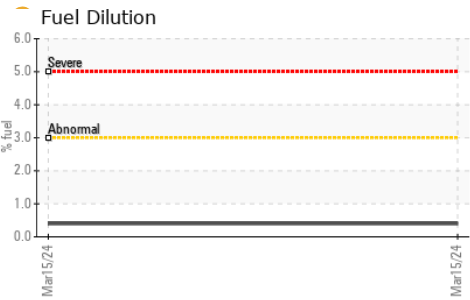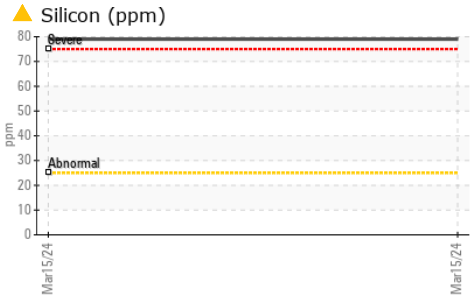

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	● 10.0	---	---

## GRAPHS

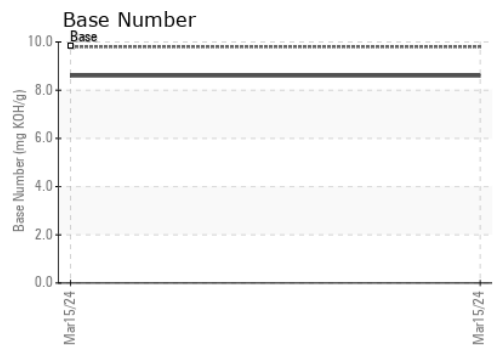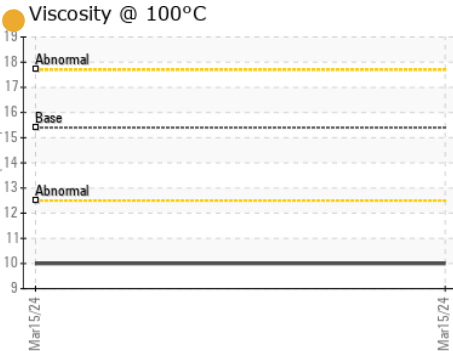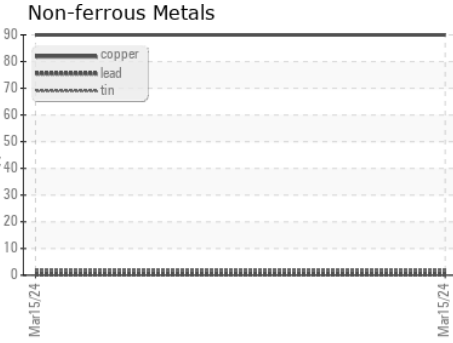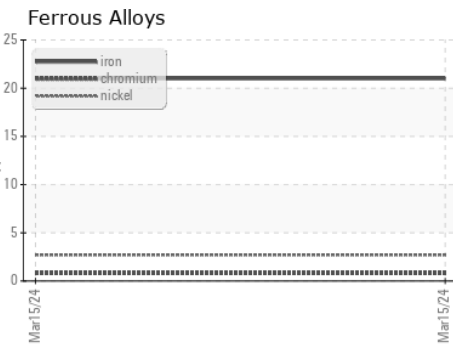

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114329      **Received** : 19 Mar 2024  
**Lab Number** : **06122139**      **Tested** : 25 Mar 2024  
**Unique Number** : 10936290      **Diagnosed** : 25 Mar 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 468 - Dearborn**  
 3051 Schaefer Rd  
 Dearborn, MI  
 US 48126  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: