




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

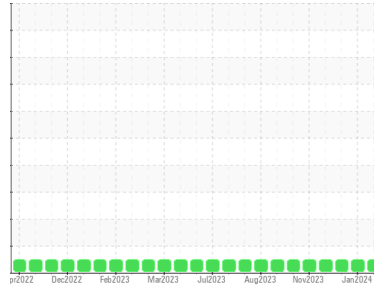

Area  
**(3A04MRY) MONTGOMERY**  
 Machine Id  
**KENWORTH 121037**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0115594</b>	GFL0088674	GFL0081886
Sample Date	Client Info	<b>13 Mar 2024</b>	31 Jan 2024	11 Jan 2024
Machine Age	hrs	<b>8562</b>	8292	8149
Oil Age	hrs	<b>8562</b>	8292	8149
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>20</b>	12	8
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>4</b>	2	1
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>3</b>	3	5
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>61</b>	64	60
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>943</b>	1007	970
Calcium	ppm ASTM D5185m 1070	<b>1077</b>	959	1060
Phosphorus	ppm ASTM D5185m 1150	<b>1027</b>	894	1071
Zinc	ppm ASTM D5185m 1270	<b>1287</b>	1310	1258
Sulfur	ppm ASTM D5185m 2060	<b>3072</b>	2591	3116

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>7</b>	6	4
Sodium	ppm ASTM D5185m	<b>1</b>	0	<1
Potassium	ppm ASTM D5185m >20	<b>7</b>	6	1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>10.2</b>	8.3	6.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.6</b>	18.4	18.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.0</b>	15.8	14.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.1</b>	7.9	8.3







# OIL ANALYSIS REPORT

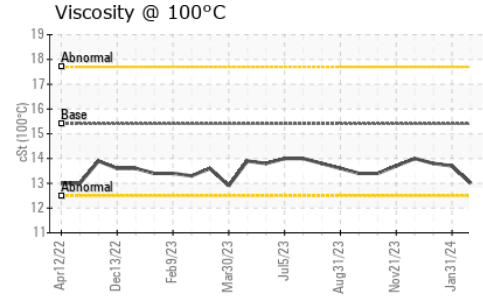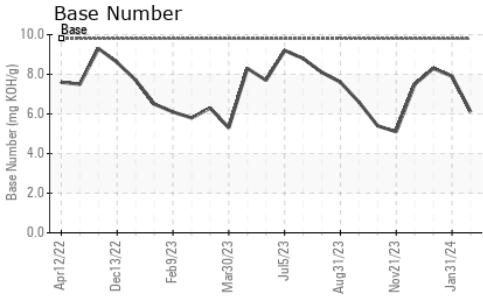

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	13.7	13.8

## GRAPHS

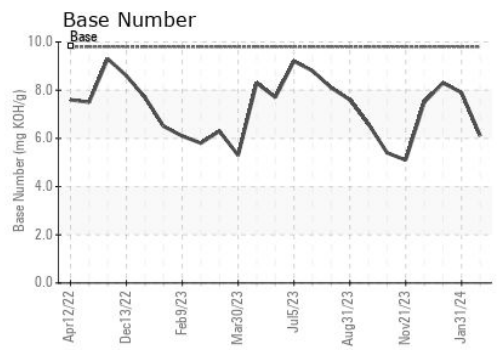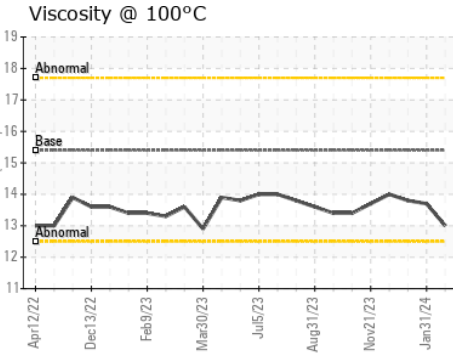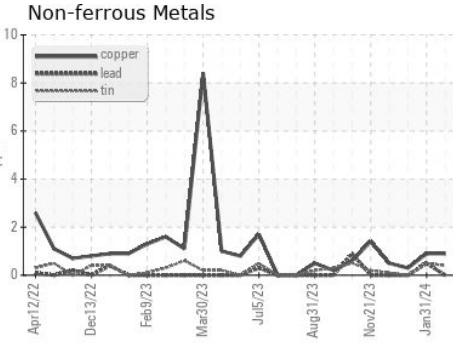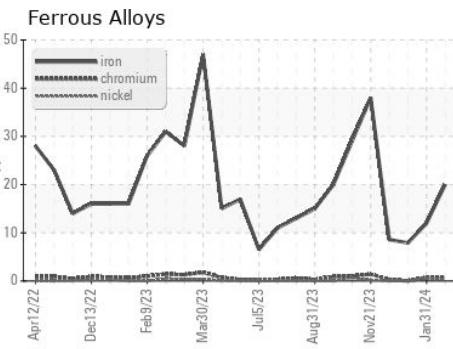

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115594  
**Lab Number** : **06122201**  
**Unique Number** : 10936352  
**Test Package** : FLEET  
**Received** : 19 Mar 2024  
**Tested** : 20 Mar 2024  
**Diagnosed** : 20 Mar 2024 - Wes Davis

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: