




OIL ANALYSIS REPORT

Sample Rating Trend

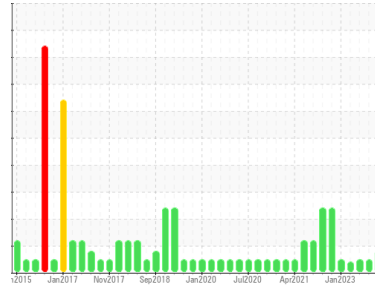

WEAR



Machine Id
10534

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0072069	GFL0072068	GFL0072026
Sample Date	Client Info	14 Mar 2024	08 Mar 2024	04 Dec 2023
Machine Age	hrs	23289	22470	22470
Oil Age	hrs	600	0	600
Oil Changed	Client Info	Changed	Not Changd	N/A
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	66	52	11
Chromium	ppm ASTM D5185m >5	2	1	<1
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m >2	<1	0	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	6	5	4
Lead	ppm ASTM D5185m >25	0	<1	<1
Copper	ppm ASTM D5185m >100	▲ 170	40	1
Tin	ppm ASTM D5185m >4	<1	0	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	2	3	1
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	68	61	42
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	956	929	741
Calcium	ppm ASTM D5185m 1070	1130	1045	616
Phosphorus	ppm ASTM D5185m 1150	978	1011	633
Zinc	ppm ASTM D5185m 1270	1252	1227	784
Sulfur	ppm ASTM D5185m 2060	2844	3219	1935

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	11	11	7
Sodium	ppm ASTM D5185m	7	8	5
Potassium	ppm ASTM D5185m >20	4	3	10

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	1.2	1.1	0.5
Nitration	Abs/cm *ASTM D7624 >20	8.5	8.3	6.1
Sulfation	Abs/.1mm *ASTM D7415 >30	19.9	19.3	18.1


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.9	14.6	13.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.9	8.2	8.8




OIL ANALYSIS REPORT


▲ Non-ferrous Metals

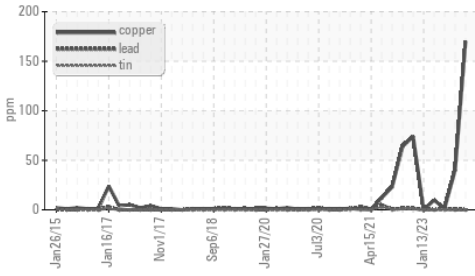

Base Number

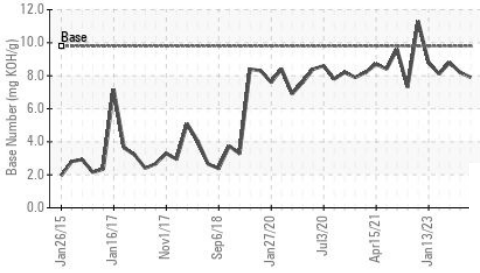

Viscosity @ 100°C

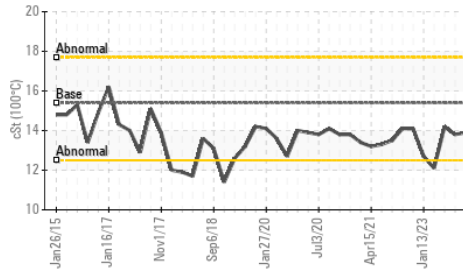

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	13.8

GRAPHS


Ferrous Alloys

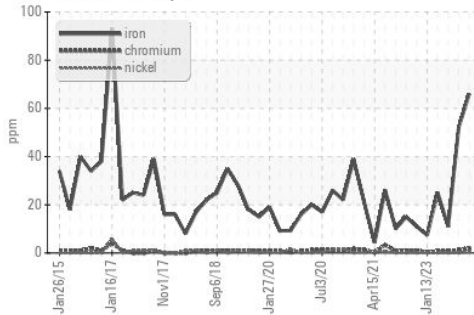


▲ Non-ferrous Metals

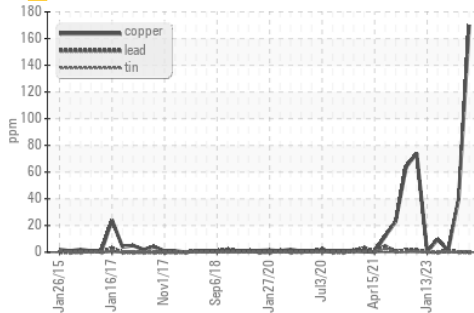

Viscosity @ 100°C

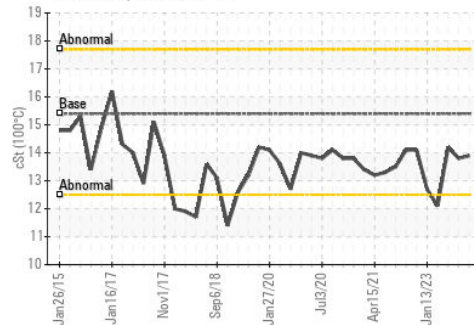

Base Number

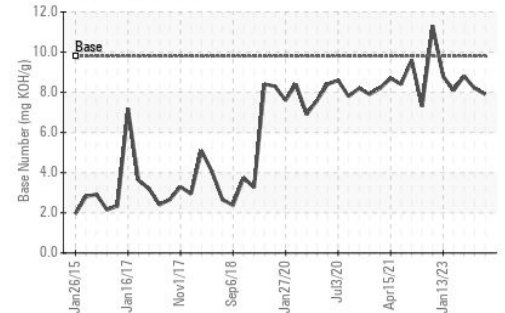

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0072069

Lab Number : 06122230

Unique Number : 10936381

Test Package : FLEET

Received : 19 Mar 2024

Tested : 20 Mar 2024

Diagnosed : 21 Mar 2024 - Don Baldrige

GFL Environmental - 094 - Cedartown

2097 Buchanan Highway

Cedartown, GA

US 30125

Contact: WILLIAM FOSTER

william.foster@gflenv.com

T: (800)207-6618

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)