




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

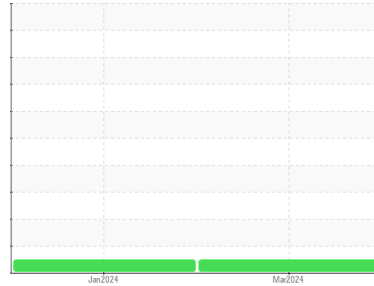

Area  
**{UNASSIGNED}**  
 Machine Id  
**814041**  
 Component  
**1 Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 5W30 (12 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0109130</b>	GFL0109217	---
Sample Date	Client Info	<b>13 Mar 2024</b>	28 Jan 2024	---
Machine Age	hrs Client Info	<b>609</b>	302	---
Oil Age	hrs Client Info	<b>600</b>	302	---
Oil Changed	Client Info	<b>Changed</b>	Not Changd	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	0.4	---
Water	WC Method >0.2	<b>NEG</b>	NEG	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>41</b>	31	---
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	1	---
Nickel	ppm ASTM D5185m >5	<b>13</b>	10	---
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >20	<b>5</b>	6	---
Lead	ppm ASTM D5185m >40	<b>2</b>	<1	---
Copper	ppm ASTM D5185m >330	<b>276</b>	41	---
Tin	ppm ASTM D5185m >15	<b>1</b>	2	---
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>200</b>	359	---
Barium	ppm ASTM D5185m 10	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m 100	<b>117</b>	125	---
Manganese	ppm ASTM D5185m	<b>4</b>	4	---
Magnesium	ppm ASTM D5185m 450	<b>748</b>	687	---
Calcium	ppm ASTM D5185m 3000	<b>1515</b>	1434	---
Phosphorus	ppm ASTM D5185m 1150	<b>761</b>	694	---
Zinc	ppm ASTM D5185m 1350	<b>903</b>	837	---
Sulfur	ppm ASTM D5185m 4250	<b>2731</b>	2394	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>70</b>	70	---
Sodium	ppm ASTM D5185m	<b>3</b>	4	---
Potassium	ppm ASTM D5185m >20	<b>4</b>	7	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.5</b>	0.3	---
Nitration	Abs/cm *ASTM D7624 >20	<b>10.1</b>	8.4	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>24.4</b>	25.7	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>22.7</b>	21.8	---
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>7.7</b>	9.1	---







# OIL ANALYSIS REPORT

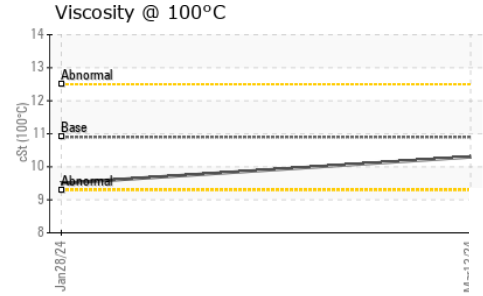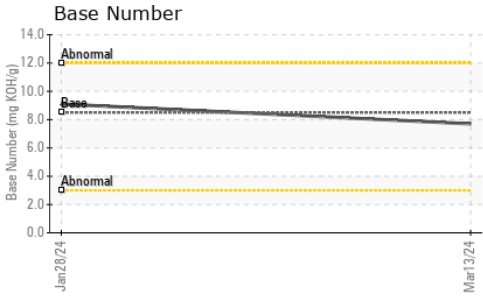

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>10.3</b>	9.5	---

## GRAPHS

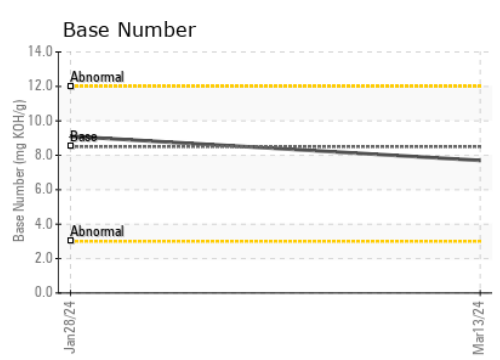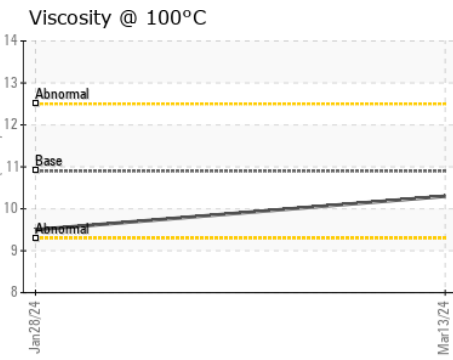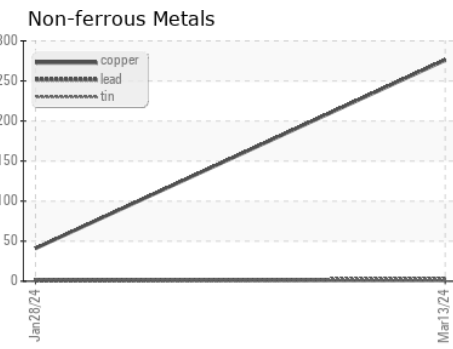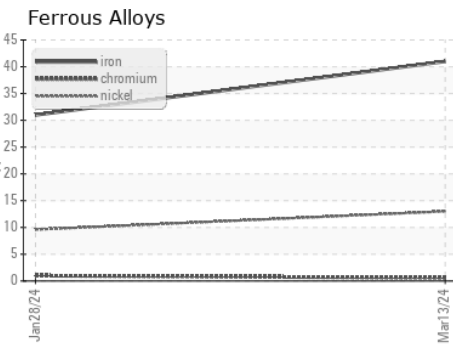

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109130      **Received** : 20 Mar 2024  
**Lab Number** : **06123388**      **Tested** : 21 Mar 2024  
**Unique Number** : 10937539      **Diagnosed** : 21 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 822 - Springfield Hauling**  
 2120 West Bennett Street  
 Springfield, MO  
 US 65807  
 Contact: Dennis Moore  
 dennis.moore@gflenv.com  
 T: (417)403-3641  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)