


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

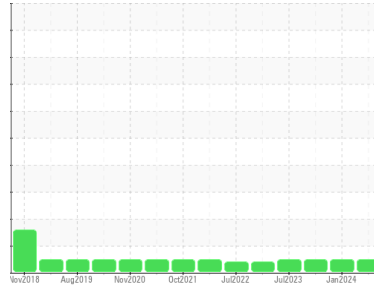

Machine Id  
**ISUZU 190178**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (11 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116929</b>	PCA0113577	PCA0097768
Sample Date	Client Info		<b>29 Feb 2024</b>	27 Jan 2024	26 Aug 2023
Machine Age	mls	Client Info	<b>0</b>	130133	132893
Oil Age	mls	Client Info	<b>0</b>	10000	10000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	---	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>19</b>	---	18
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	---	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	---	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	---	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	---	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>5</b>	---	14
Barium	ppm	ASTM D5185m 0	<b>2</b>	---	0
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	---	58
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	---	1
Magnesium	ppm	ASTM D5185m 950	<b>881</b>	---	927
Calcium	ppm	ASTM D5185m 1050	<b>1109</b>	---	1211
Phosphorus	ppm	ASTM D5185m 995	<b>1028</b>	---	1077
Zinc	ppm	ASTM D5185m 1180	<b>1179</b>	---	1336
Sulfur	ppm	ASTM D5185m 2600	<b>3370</b>	---	4159

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	---	3
Sodium	ppm	ASTM D5185m	<b>0</b>	---	<1
Potassium	ppm	ASTM D5185m >20	<b>5</b>	---	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	---	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.7</b>	5.8	4.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.3</b>	17.4	16.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.0</b>	13.4	12.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.4</b>	9.5	9.5









# OIL ANALYSIS REPORT

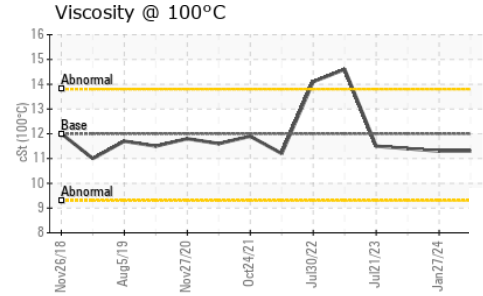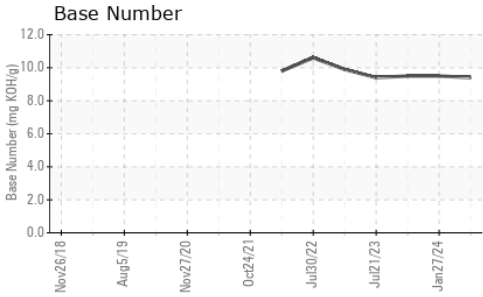

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.3</b>	11.3	11.4

## GRAPHS

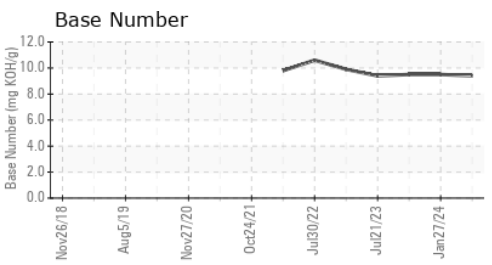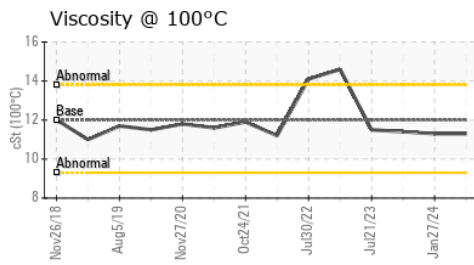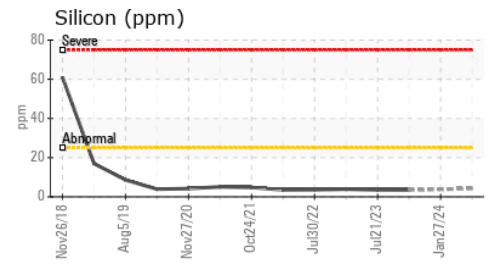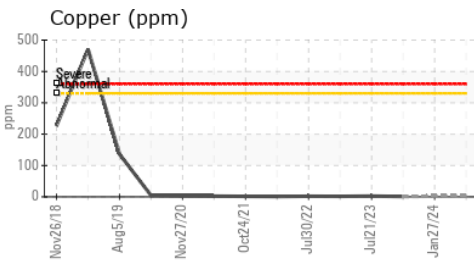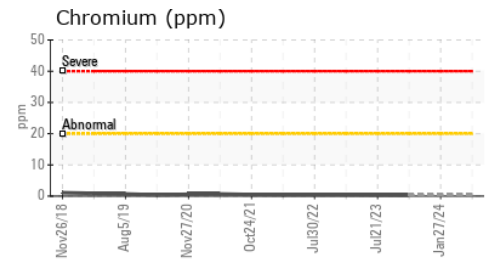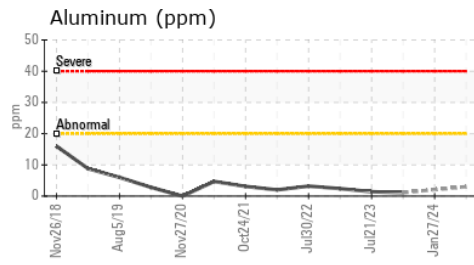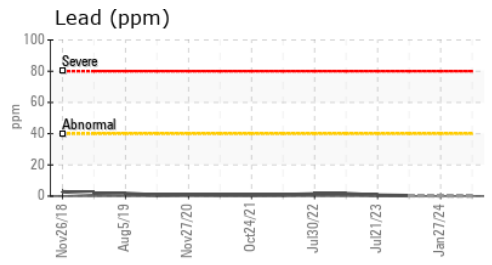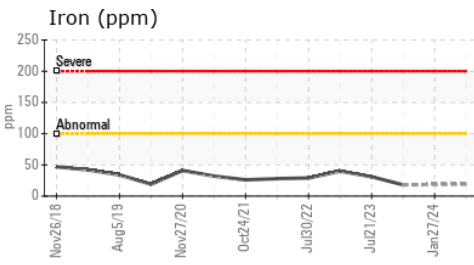

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116929      **Received** : 21 Mar 2024  
**Lab Number** : **06124525**      **Tested** : 21 Mar 2024  
**Unique Number** : 10938676      **Diagnosed** : 21 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #114**  
 63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)