




# OIL ANALYSIS REPORT

Sample Rating Trend

**WEAR**



Area  
**(BD00473)**  
Machine Id  
**912012**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

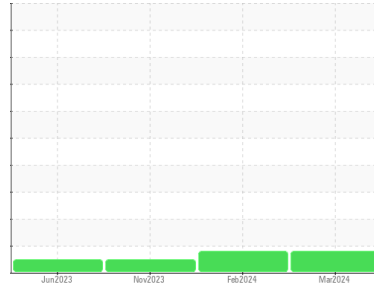

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Valve wear is indicated. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108773</b>	GFL0108943	GFL0101576
Sample Date	Client Info	<b>18 Mar 2024</b>	29 Feb 2024	06 Nov 2023
Machine Age	hrs	<b>4907</b>	4015	3900
Oil Age	hrs	<b>4015</b>	3900	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>23</b>	27	6
Chromium	ppm ASTM D5185m >20	<b>0</b>	1	<1
Nickel	ppm ASTM D5185m >5	<b>▲ 8</b>	▲ 9	1
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>0</b>	2	1
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>2</b>	3	1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	1	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	71	60
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>950</b>	1022	906
Calcium	ppm ASTM D5185m 1070	<b>1105</b>	1131	1045
Phosphorus	ppm ASTM D5185m 1150	<b>992</b>	1037	1000
Zinc	ppm ASTM D5185m 1270	<b>1219</b>	1319	1162
Sulfur	ppm ASTM D5185m 2060	<b>2741</b>	2674	2893

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	5	4
Sodium	ppm ASTM D5185m	<b>6</b>	6	0
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	2

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>1</b>	0.9	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>10.5</b>	10.5	6.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.6</b>	23.2	18.8


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.5</b>	20.3	14.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>4.7</b>	5.1	8.6




# OIL ANALYSIS REPORT


### ▲ Ferrous Alloys

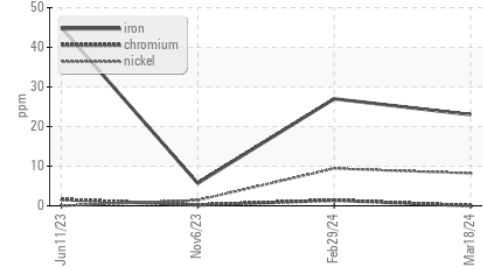

### Base Number

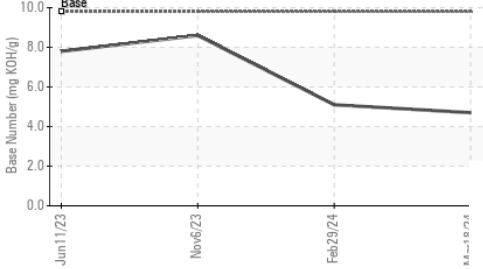

### Viscosity @ 100°C

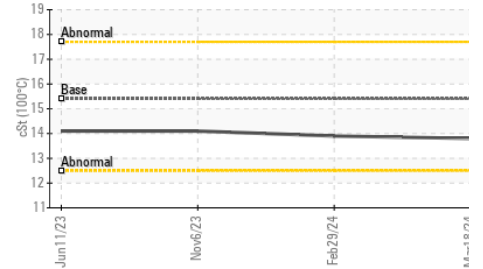


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.9

### GRAPHS


### ▲ Ferrous Alloys

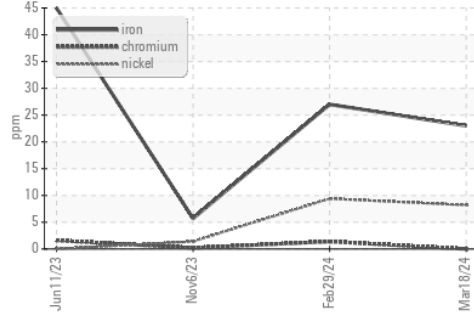


### Non-ferrous Metals

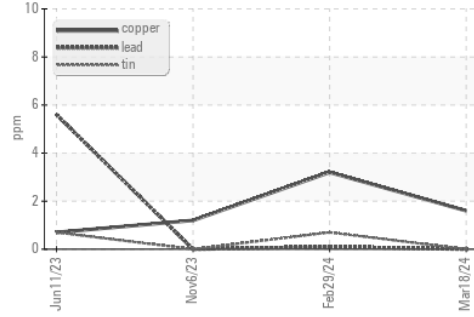

### Viscosity @ 100°C

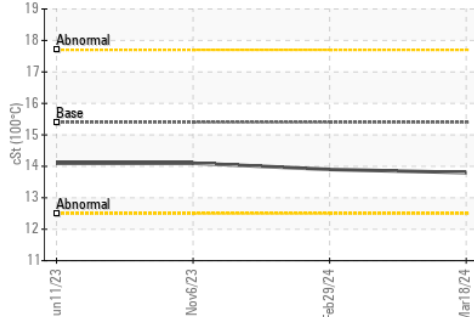

### Base Number

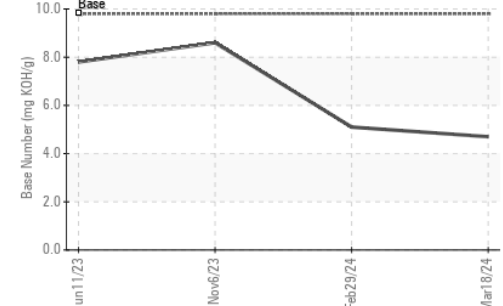

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108773      **Received** : 21 Mar 2024  
**Lab Number** : 06124590      **Tested** : 22 Mar 2024  
**Unique Number** : 10938741      **Diagnosed** : 23 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)