




# OIL ANALYSIS REPORT

Sample Rating Trend

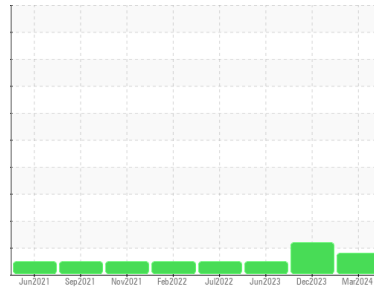

FUEL



Machine Id  
**4601M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108869</b>	GFL0101441	GFL0081414
Sample Date	Client Info		<b>19 Mar 2024</b>	05 Dec 2023	08 Jun 2023
Machine Age	hrs	Client Info	<b>19426</b>	18968	18129
Oil Age	hrs	Client Info	<b>19426</b>	18129	16353
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>MARGINAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>30</b>	3	41
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>8</b>	2	28
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	15	9
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	59	50
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	5
Magnesium	ppm	ASTM D5185m 1010	<b>934</b>	833	636
Calcium	ppm	ASTM D5185m 1070	<b>1054</b>	1243	1262
Phosphorus	ppm	ASTM D5185m 1150	<b>1021</b>	997	893
Zinc	ppm	ASTM D5185m 1270	<b>1228</b>	1192	1113
Sulfur	ppm	ASTM D5185m 2060	<b>3296</b>	3044	2771

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	22
Sodium	ppm	ASTM D5185m	<b>6</b>	3	45
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	9
Fuel	%	ASTM D3524 >3.0	<b>▲ 1.0</b>	▲ 4.3	<1.0

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.7</b>	0.9	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	9.1	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	21.7	22.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.7</b>	17.6	19.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.3</b>	6.1	9.0




# OIL ANALYSIS REPORT


▲ Fuel Dilution

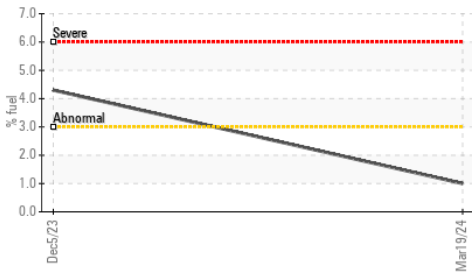

Base Number

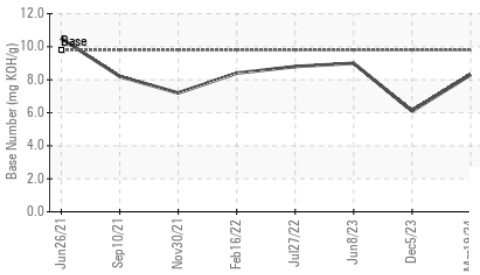





Viscosity @ 100°C

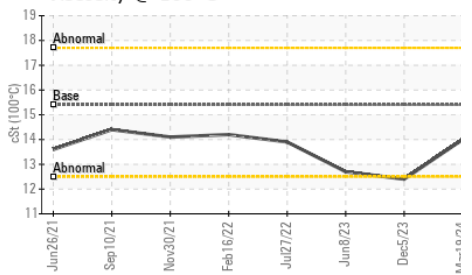

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	▲ 12.4	12.7

## GRAPHS

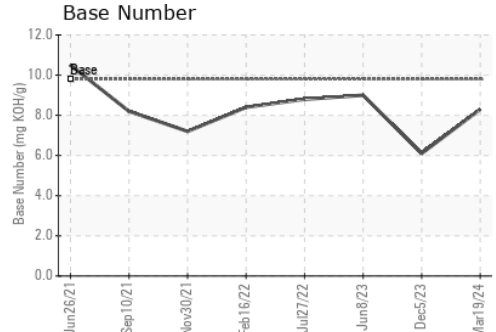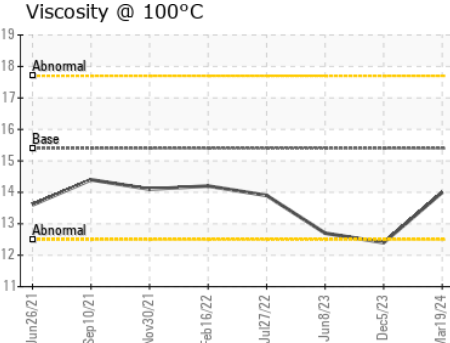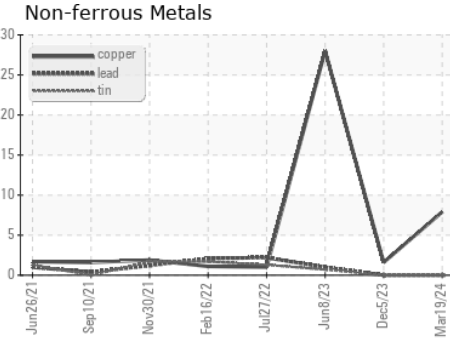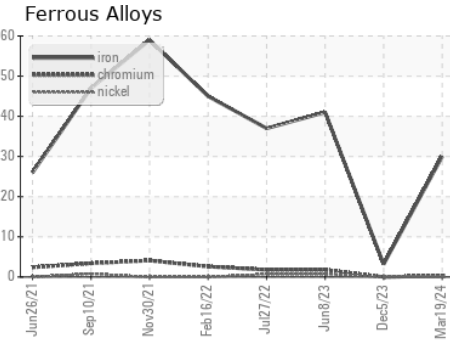

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108869 **Received** : 21 Mar 2024  
**Lab Number** : **06124591** **Tested** : 22 Mar 2024  
**Unique Number** : 10938742 **Diagnosed** : 22 Mar 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)