




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

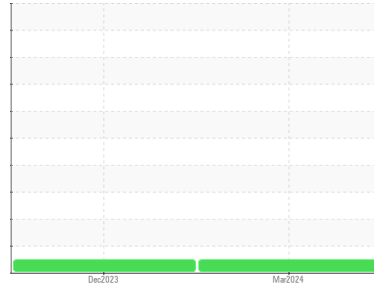

Machine Id  
**7831M**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108879</b>	GFL0101510	---
Sample Date	Client Info	<b>19 Mar 2024</b>	01 Dec 2023	---
Machine Age	hrs Client Info	<b>7560</b>	7333	---
Oil Age	hrs Client Info	<b>7333</b>	0	---
Oil Changed	Client Info	<b>Not Changed</b>	Changed	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method >0.2	<b>NEG</b>	NEG	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>6</b>	14	---
Chromium	ppm ASTM D5185m >5	<b>0</b>	0	---
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	---
Titanium	ppm ASTM D5185m	<b>0</b>	0	---
Silver	ppm ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >30	<b>0</b>	2	---
Lead	ppm ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm ASTM D5185m >150	<b>0</b>	<1	---
Tin	ppm ASTM D5185m >5	<b>0</b>	0	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	<1	---
Barium	ppm ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m 60	<b>55</b>	57	---
Manganese	ppm ASTM D5185m 0	<b>0</b>	0	---
Magnesium	ppm ASTM D5185m 1010	<b>941</b>	974	---
Calcium	ppm ASTM D5185m 1070	<b>1044</b>	1113	---
Phosphorus	ppm ASTM D5185m 1150	<b>1033</b>	876	---
Zinc	ppm ASTM D5185m 1270	<b>1230</b>	1249	---
Sulfur	ppm ASTM D5185m 2060	<b>3517</b>	2916	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>2</b>	2	---
Sodium	ppm ASTM D5185m	<b>2</b>	2	---
Potassium	ppm ASTM D5185m >20	<b>0</b>	0	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.3	---
Nitration	Abs/cm *ASTM D7624 >20	<b>6.0</b>	5.9	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.2</b>	18.5	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.1</b>	14.0	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.8</b>	8.5	---







# OIL ANALYSIS REPORT

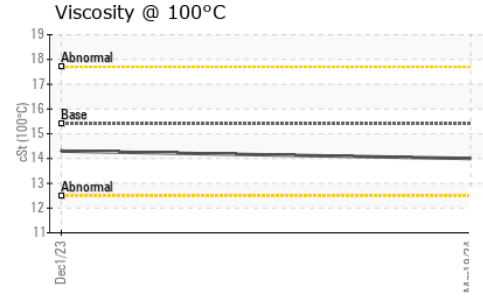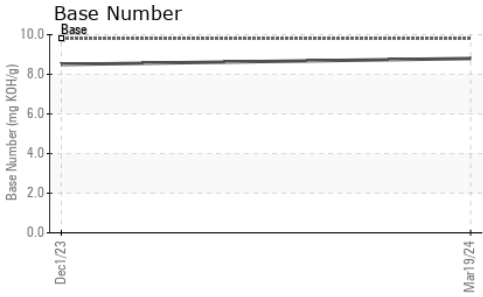

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.3	---

## GRAPHS

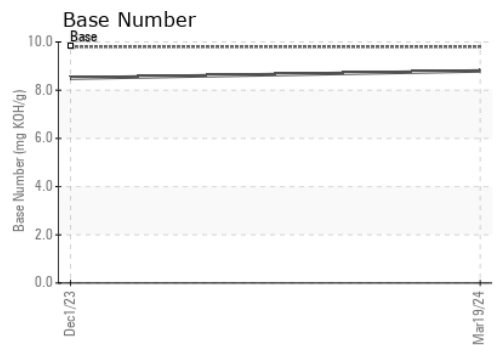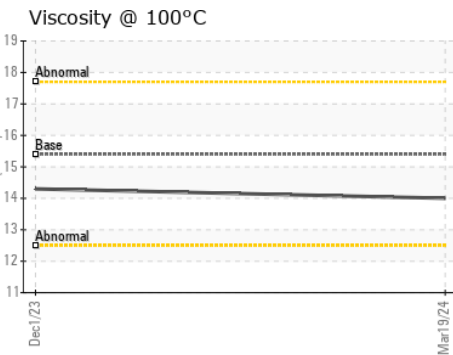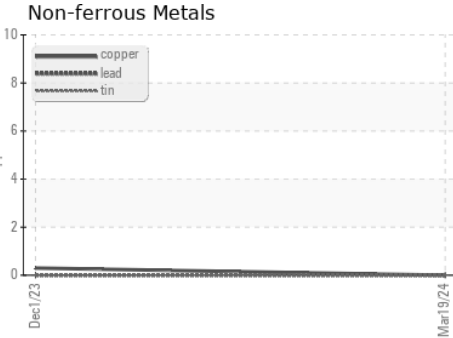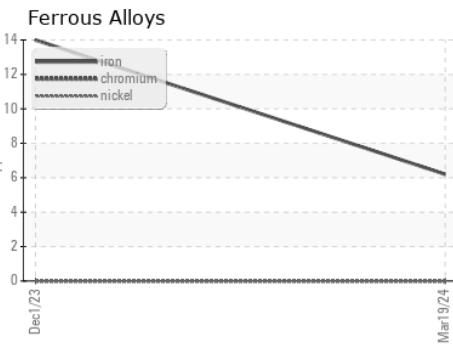

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0108879  
 Lab Number : **06124609**  
 Unique Number : 10938760  
 Test Package : FLEET

Received : 21 Mar 2024  
 Tested : 22 Mar 2024  
 Diagnosed : 22 Mar 2024 - Wes Davis

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)