


# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**

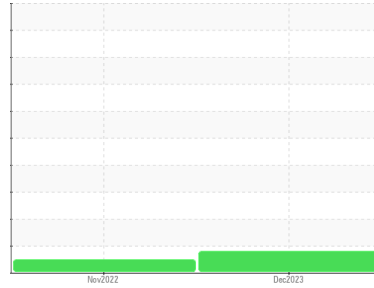

Machine Id  
**621519**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The iron level is abnormal. All other component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0113643</b>	PCA0079766	---
Sample Date	Client Info		<b>14 Dec 2023</b>	08 Nov 2022	---
Machine Age	mls	Client Info	<b>82669</b>	32861	---
Oil Age	mls	Client Info	<b>82669</b>	32861	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>▲ 104</b>	79	---
Chromium	ppm	ASTM D5185m >20	<b>4</b>	6	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	2	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>41</b>	50	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	3	---
Copper	ppm	ASTM D5185m >330	<b>48</b>	288	---
Tin	ppm	ASTM D5185m >15	<b>2</b>	11	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>7</b>	31	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>65</b>	39	---
Manganese	ppm	ASTM D5185m 0	<b>1</b>	4	---
Magnesium	ppm	ASTM D5185m 950	<b>975</b>	499	---
Calcium	ppm	ASTM D5185m 1050	<b>1443</b>	1676	---
Phosphorus	ppm	ASTM D5185m 995	<b>1053</b>	746	---
Zinc	ppm	ASTM D5185m 1180	<b>1346</b>	882	---
Sulfur	ppm	ASTM D5185m 2600	<b>2723</b>	1977	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	9	---
Sodium	ppm	ASTM D5185m	<b>5</b>	7	---
Potassium	ppm	ASTM D5185m >20	<b>93</b>	126	---

## INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.9</b>	1.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>14.2</b>	13.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.5</b>	26.4	---

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>26.2</b>	28.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.1</b>	7.8	---

# OIL ANALYSIS REPORT


**▲ Ferrous Alloys**

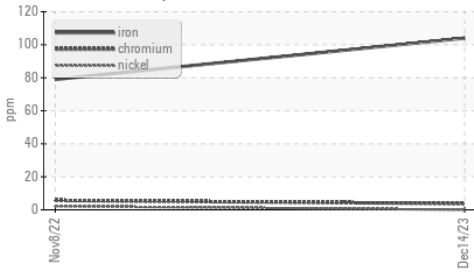


**Glycol Contamination**

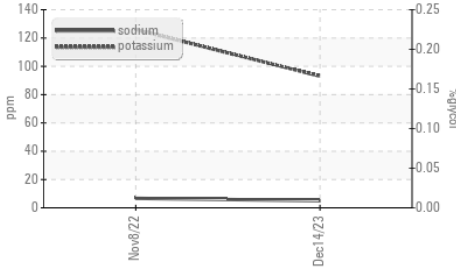


**Base Number**

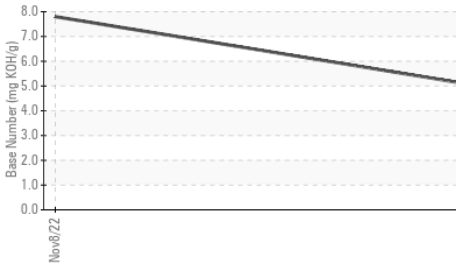

**Viscosity @ 100°C**

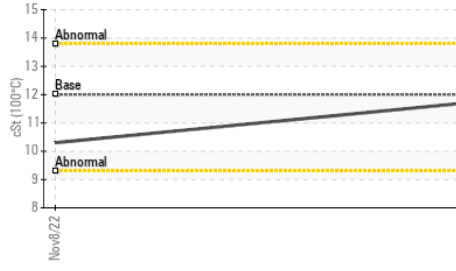

**Aluminum (ppm)**

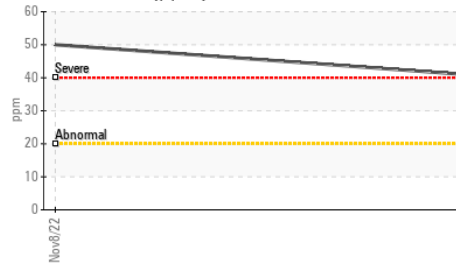


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.7	10.3

**GRAPHS**

**▲ Iron (ppm)**

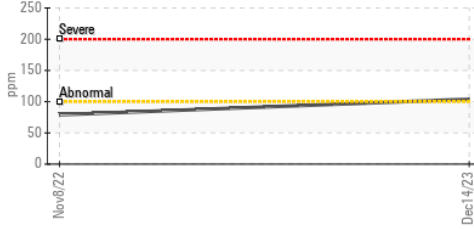


**Lead (ppm)**




**Aluminum (ppm)**




**Chromium (ppm)**

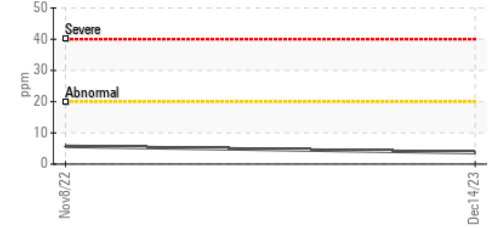


**Copper (ppm)**

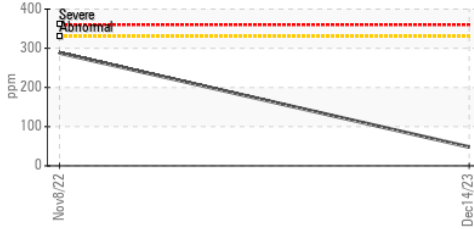


**Silicon (ppm)**

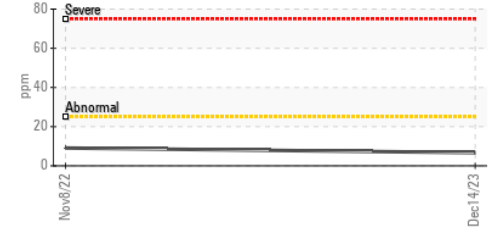

**Viscosity @ 100°C**

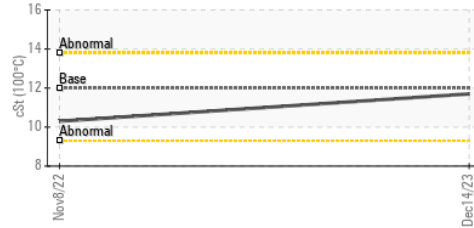

**Base Number**

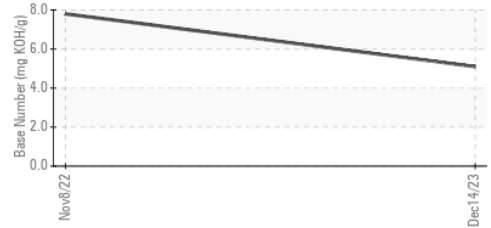

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113643 **Received** : 21 Mar 2024  
**Lab Number** : 06124628 **Tested** : 22 Mar 2024  
**Unique Number** : 10938779 **Diagnosed** : 23 Mar 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #114**  
 63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085

Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)