


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

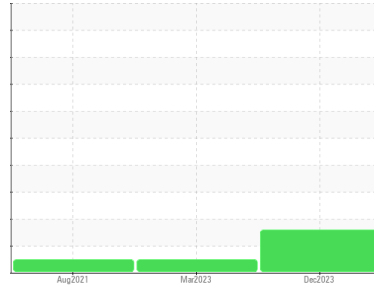

Machine Id
214230
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Wear

Piston, ring and cylinder wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0113654	PCA0094535	PCA0055020
Sample Date	Client Info		21 Dec 2023	14 Mar 2023	27 Aug 2021
Machine Age	mls	Client Info	0	158000	51493
Oil Age	mls	Client Info	0	0	51493
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 129	57	90
Chromium	ppm	ASTM D5185m >20	3	2	4
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >20	▲ 35	15	37
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	9	5	56
Tin	ppm	ASTM D5185m >15	0	2	7
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	5	8	24
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	80	72	36
Manganese	ppm	ASTM D5185m 0	1	2	6
Magnesium	ppm	ASTM D5185m 950	1167	988	690
Calcium	ppm	ASTM D5185m 1050	1468	1237	1729
Phosphorus	ppm	ASTM D5185m 995	1246	1012	947
Zinc	ppm	ASTM D5185m 1180	1551	1316	1179
Sulfur	ppm	ASTM D5185m 2600	3736	3002	2716


CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	9	9
Sodium	ppm	ASTM D5185m	21	4	7
Potassium	ppm	ASTM D5185m >20	18	11	59

INFRA-RED	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.1	1	0.8
Nitration	Abs/cm	*ASTM D7624 >20	17.1	14.9	13.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	30.7	27.7	26.4


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	31.8	26.8	22.5
Base Number (BN)	mg KOH/g	ASTM D2896	5.1	5.1	---

OIL ANALYSIS REPORT


▲ Ferrous Alloys

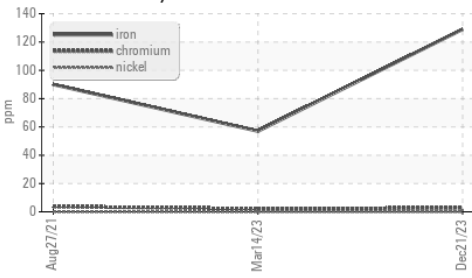


▲ Aluminum (ppm)

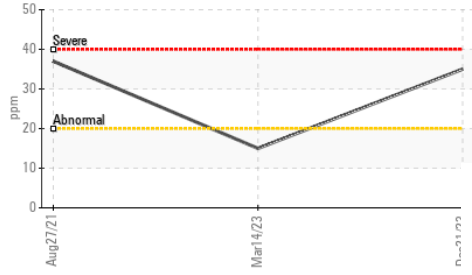

Base Number

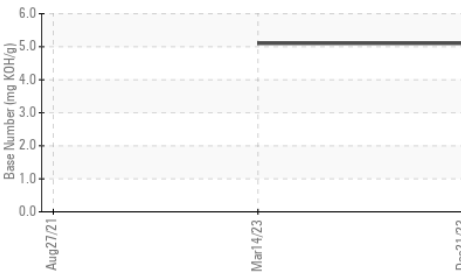

Viscosity @ 100°C

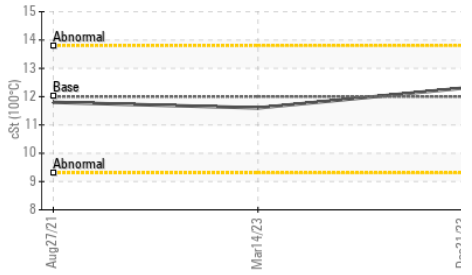


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.3	11.6

GRAPHS


▲ Iron (ppm)

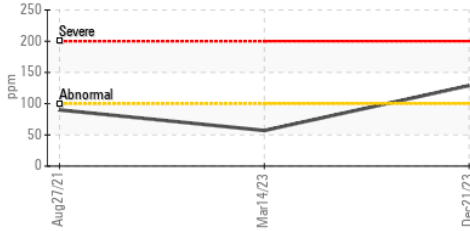


Lead (ppm)

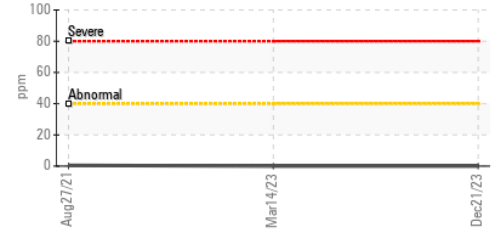


▲ Aluminum (ppm)

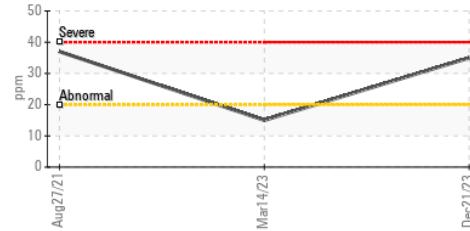


Chromium (ppm)

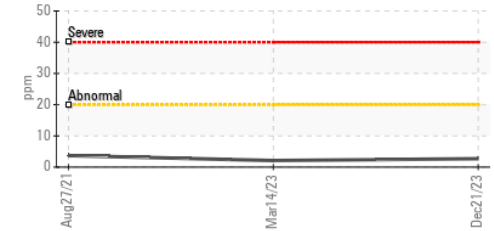


▲ Copper (ppm)

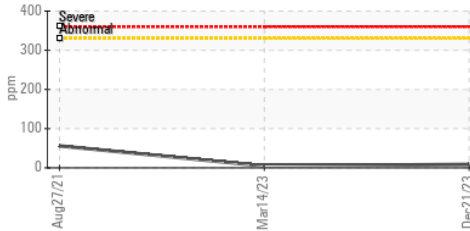


Silicon (ppm)

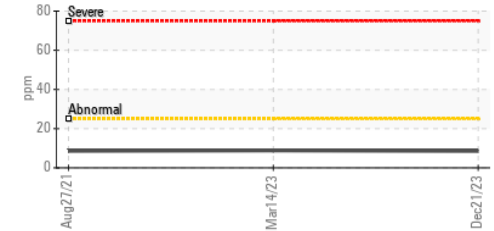

Viscosity @ 100°C

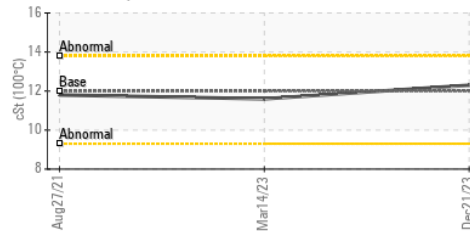

Base Number

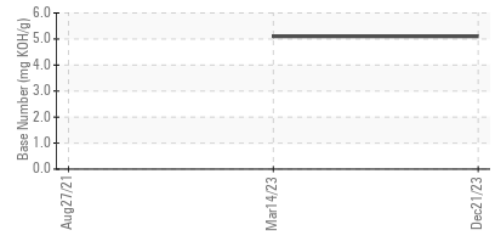

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113654 **Received** : 21 Mar 2024
Lab Number : 06124650 **Tested** : 22 Mar 2024
Unique Number : 10938801 **Diagnosed** : 23 Mar 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #114
 63 REPAUPO STATION ROAD
 LOGAN TOWNSHIP, NJ
 US 08085
 Contact: ED DAVIS
 edavis@millertransgroup.com
 T: (856)214-3521
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)