

OIL ANALYSIS REPORT







Machine Id 641607 Component

Diesel Engine Fluid PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0113637		
Sample Date		Client Info		09 Feb 2024		
Machine Age	mls	Client Info		52114		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	96		
Chromium	ppm	ASTM D5185m	>20	6		
Nickel	ppm	ASTM D5185m	>4	1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	47		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	149		
Tin	ppm	ASTM D5185m	>15	4		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
	pp	No III Boroom		U		
ADDITIVES	66	method	limit/base	current	history1	history2
ADDITIVES Boron	ppm		limit/base			history2
		method		current	history1	· · · · ·
Boron	ppm	method ASTM D5185m	2	current 16	history1	
Boron Barium Molybdenum Manganese	ppm ppm	method ASTM D5185m ASTM D5185m	2 0	current 16 2	history1 	
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50	current 16 2 50 4 579	history1 	
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050	current 16 2 50 4 579 1709	history1 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	current 16 2 50 4 579 1709 770	history1 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180	current 16 2 50 4 579 1709 770 942	history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600	current 16 2 50 4 579 1709 770	history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	current 16 2 50 4 579 1709 770 942 2057 current	history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600	current 16 2 50 4 579 1709 770 942 2057 current 9	history1 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25	current 16 2 50 4 579 1709 770 942 2057 current 9 4	history1 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20	current 16 2 50 4 579 1709 770 942 2057 current 9 4 103	history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 Imit/base >25 >20	current 16 2 50 4 579 1709 770 942 2057 current 9 4 103 current	history1 history1 history1 history1 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3	current 16 2 50 4 579 1709 770 942 2057 current 9 4 103 current 1.5	history1 history1 history1 history1	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 imit/base >25 >20 imit/base >3 >20	current 16 2 50 4 579 1709 770 942 2057 current 9 4 103 current 1.5 12.4	history1	history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3	current 16 2 50 4 579 1709 770 942 2057 current 9 4 103 current 1.5	history1 history1 history1 history1	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 imit/base >25 >20 imit/base >3 >20	current 16 2 50 4 579 1709 770 942 2057 current 9 4 103 current 1.5 12.4	history1	history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 imit/base >25 20 imit/base >3 >20 >30	current 16 2 50 4 579 1709 770 942 2057 current 9 4 103 current 1.5 12.4 24.6	history1 history1 history1 history1	 history2 history2 history2



OIL ANALYSIS REPORT

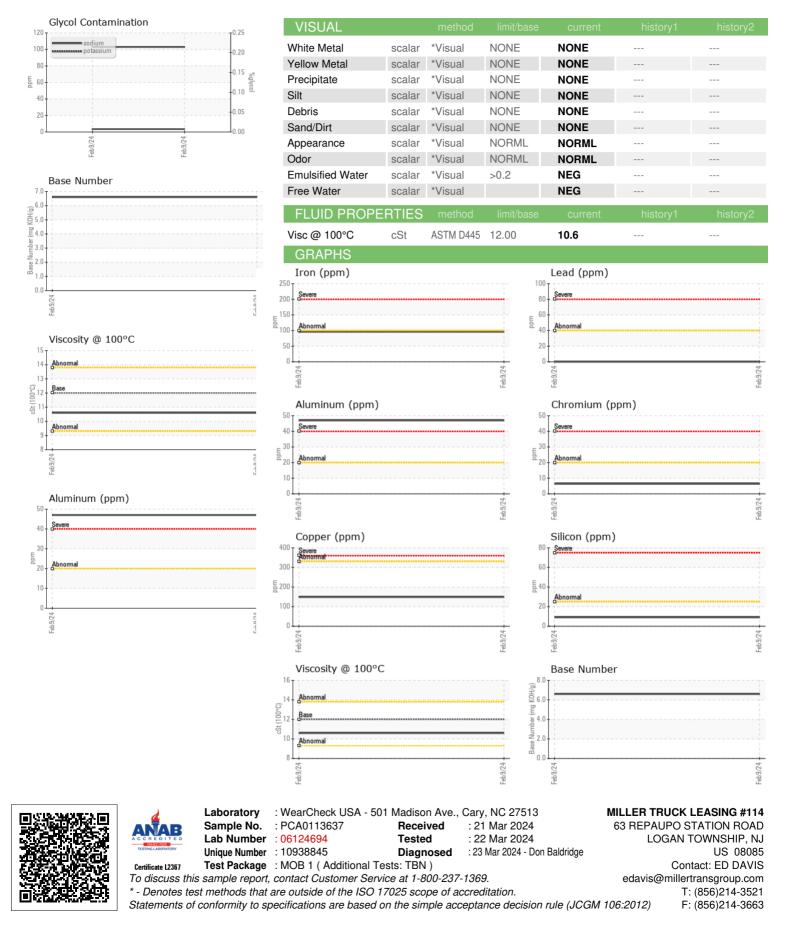

Contact/Location: ED DAVIS - MILLOG