




# OIL ANALYSIS REPORT

Sample Rating Trend

**WEAR**

Area  
**(EHR510)**  
Machine Id  
**2637C**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA DURON GEO LD 15W40 (8 GAL)**

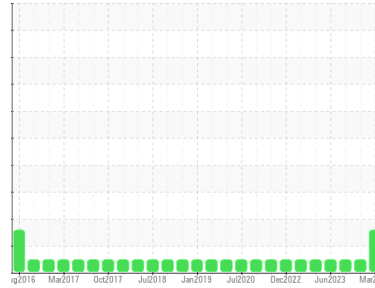

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0111541</b>	GFL0083095	GFL0083109
Sample Date	Client Info		<b>12 Mar 2024</b>	27 Jul 2023	18 Jul 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>▲ 52</b>	8	8
Chromium	ppm	ASTM D5185m >4	<b>▲ 6</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>2</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>8</b>	1	2
Lead	ppm	ASTM D5185m >30	<b>3</b>	<1	0
Copper	ppm	ASTM D5185m >35	<b>5</b>	1	<1
Tin	ppm	ASTM D5185m >4	<b>2</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>4</b>	33	32
Barium	ppm	ASTM D5185m 5	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	56	58
Manganese	ppm	ASTM D5185m 0	<b>4</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>672</b>	576	635
Calcium	ppm	ASTM D5185m 1510	<b>1720</b>	1621	1629
Phosphorus	ppm	ASTM D5185m 780	<b>858</b>	761	822
Zinc	ppm	ASTM D5185m 870	<b>1121</b>	963	1013
Sulfur	ppm	ASTM D5185m 2040	<b>2833</b>	2890	3062

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>13</b>	5	4
Sodium	ppm	ASTM D5185m	<b>4</b>	8	6
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	0

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.4</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.5</b>	9.4	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.3</b>	19.1	18.9


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>24.1</b>	16.3	15.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>3.6</b>	6.0	6.8




# OIL ANALYSIS REPORT


### ▲ Ferrous Alloys

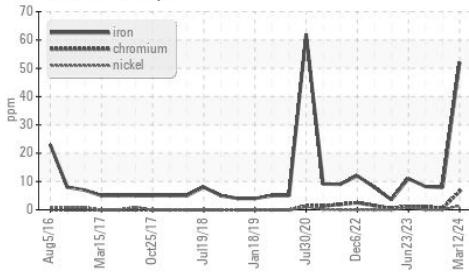

### Base Number

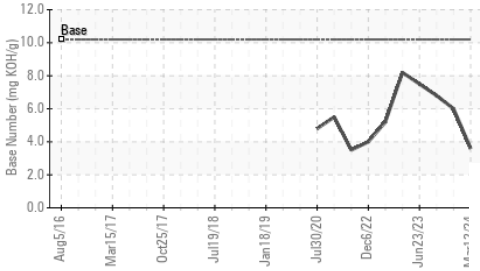

### Viscosity @ 100°C

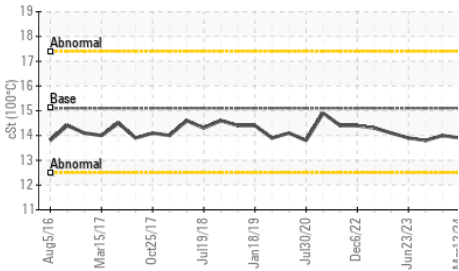

### VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

### FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	13.9	14.0

### GRAPHS


### ▲ Ferrous Alloys

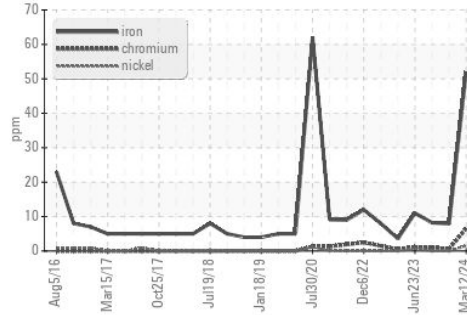


### Non-ferrous Metals

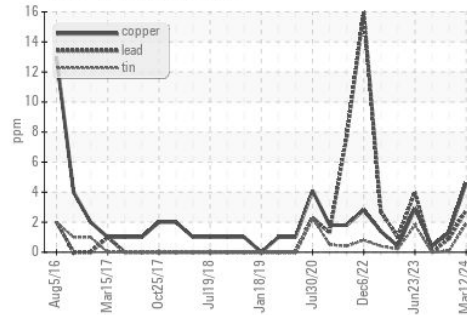

### Viscosity @ 100°C

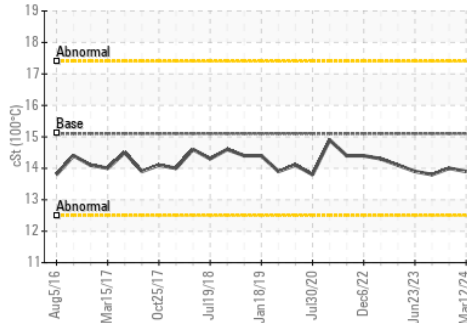

### Base Number

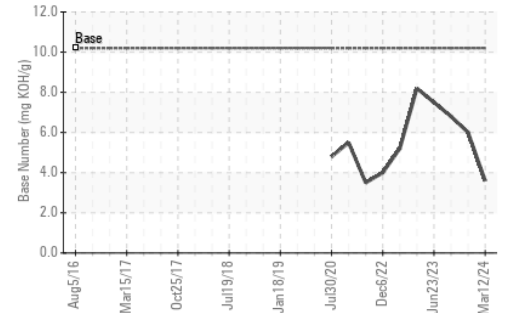

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111541

Lab Number : 06124774

Unique Number : 10938925

Test Package : FLEET

Received : 21 Mar 2024

Tested : 22 Mar 2024

Diagnosed : 24 Mar 2024 - Don Baldrige

GFL Environmental - 074 - Douglas - Transwaste

1219 Landfill Road

Douglas, GA

US 31533

Contact: CURTIS JACOBS

CURTIS.JACOBS@GFLENV.COM

T: (912)384-6001

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)