




# OIL ANALYSIS REPORT

Sample Rating Trend

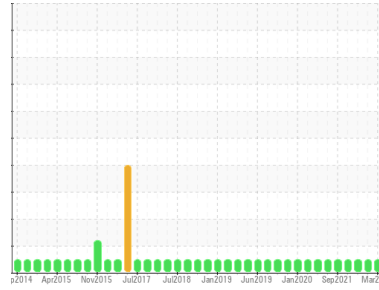

**NORMAL**



Area  
**(EDB369)**

Machine Id  
**2508**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0110802</b>	GFL0088470	GFL0088466
Sample Date	Client Info	<b>11 Mar 2024</b>	13 Sep 2023	12 Jul 2023
Machine Age	hrs	<b>22063</b>	21750	21440
Oil Age	hrs	<b>600</b>	600	650
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >165	<b>12</b>	18	15
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	2	1
Lead	ppm ASTM D5185m >150	<b>&lt;1</b>	2	2
Copper	ppm ASTM D5185m >90	<b>2</b>	2	3
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	2	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 151	<b>281</b>	204	38
Barium	ppm ASTM D5185m 0.4	<b>2</b>	44	0
Molybdenum	ppm ASTM D5185m 250	<b>84</b>	81	61
Manganese	ppm ASTM D5185m	<b>0</b>	1	<1
Magnesium	ppm ASTM D5185m 0	<b>367</b>	449	797
Calcium	ppm ASTM D5185m 2046	<b>1588</b>	1326	1221
Phosphorus	ppm ASTM D5185m 1043	<b>1113</b>	977	972
Zinc	ppm ASTM D5185m 943	<b>1314</b>	1217	1226
Sulfur	ppm ASTM D5185m 5012	<b>3781</b>	3430	3508

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >35	<b>7</b>	8	6
Sodium	ppm ASTM D5185m	<b>23</b>	28	20
Potassium	ppm ASTM D5185m >20	<b>4</b>	4	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >7.5	<b>0.5</b>	0.7	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>9.5</b>	9.8	11.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.8</b>	24.5	24.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.2</b>	19.7	20.3
Base Number (BN)	mg KOH/g ASTM D2896 12.5	<b>6.8</b>	6.6	6.5







# OIL ANALYSIS REPORT

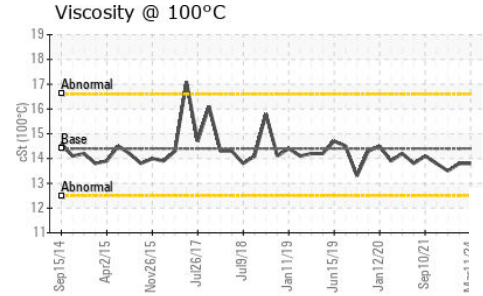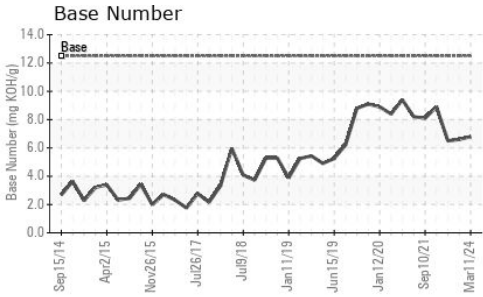

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.8</b>	13.8	13.5

## GRAPHS

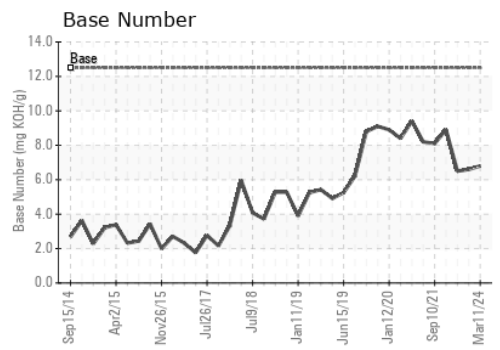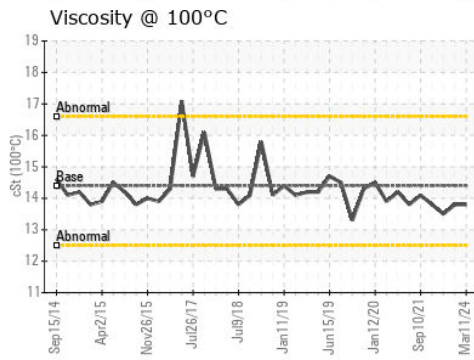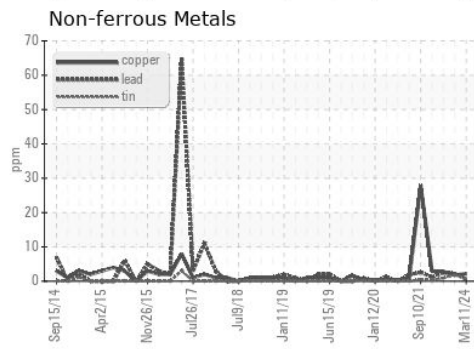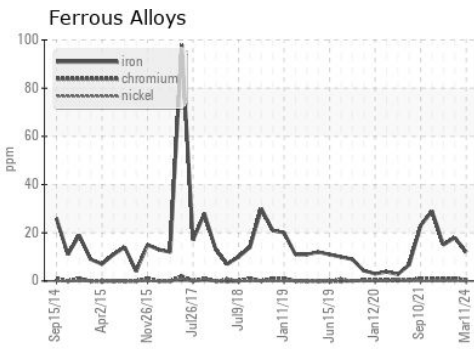

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110802 **Received** : 21 Mar 2024  
**Lab Number** : **06124782** **Tested** : 22 Mar 2024  
**Unique Number** : 10938933 **Diagnosed** : 24 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 146 - Augusta**  
 1064 Franke Industrial  
 Augusta, GA  
 US 30909  
 Contact: JEFFERY WASHINGTON  
 jeff.washington@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)