




Machine Id
PREVOST MOTOR COACH 112
 Component
Rear Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

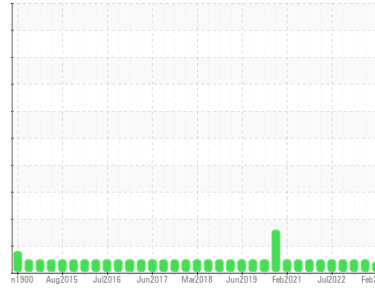

DIAGNOSIS

- Recommendation**
 Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.
- Fluid Condition**
 The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0111565	PCA0101049	PCA0094180
Sample Date	Client Info		21 Feb 2024	22 Nov 2023	18 Apr 2023
Machine Age	mls	Client Info	440848	439121	414175
Oil Age	mls	Client Info	300	11433	12069
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	6	8	8
Chromium	ppm	ASTM D5185m >20	<1	0	<1
Nickel	ppm	ASTM D5185m >4	0	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	<1	0	0
Aluminum	ppm	ASTM D5185m >20	3	3	2
Lead	ppm	ASTM D5185m >40	<1	<1	0
Copper	ppm	ASTM D5185m >330	1	2	1
Tin	ppm	ASTM D5185m >15	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	73	0	1
Barium	ppm	ASTM D5185m 0	2	0	0
Molybdenum	ppm	ASTM D5185m 60	48	61	61
Manganese	ppm	ASTM D5185m 0	<1	0	<1
Magnesium	ppm	ASTM D5185m 1010	416	1021	1006
Calcium	ppm	ASTM D5185m 1070	1736	1085	1073
Phosphorus	ppm	ASTM D5185m 1150	952	980	1046
Zinc	ppm	ASTM D5185m 1270	1172	1336	1331
Sulfur	ppm	ASTM D5185m 2060	3742	3138	3717

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	3	3
Sodium	ppm	ASTM D5185m	3	13	3
Potassium	ppm	ASTM D5185m >20	3	<1	1
Fuel	%	ASTM D3524 >5	0.4	<1.0	<1.0




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	4.6	7.6	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.3	18.8	17.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	12.5	14.4	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.70	10.09	8.88









OIL ANALYSIS REPORT

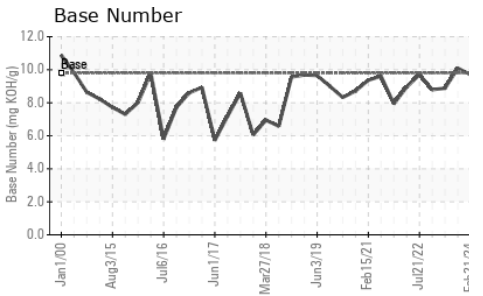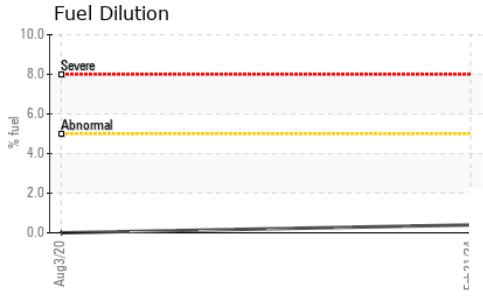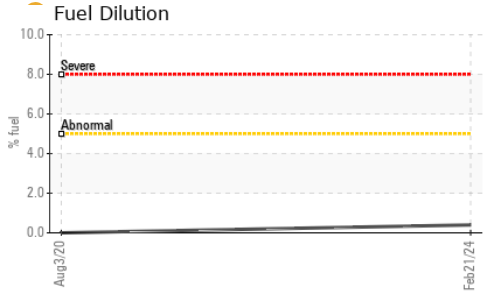

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	● 12.2	14.1	14.0

GRAPHS

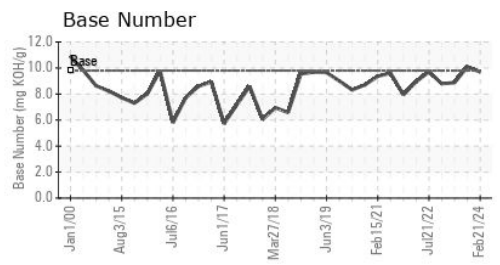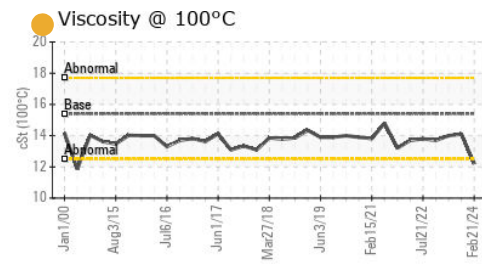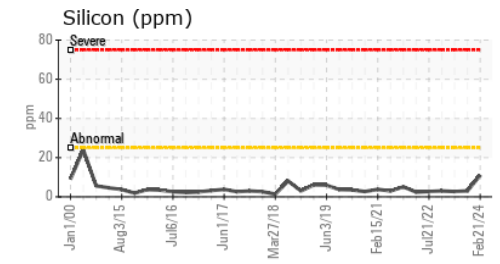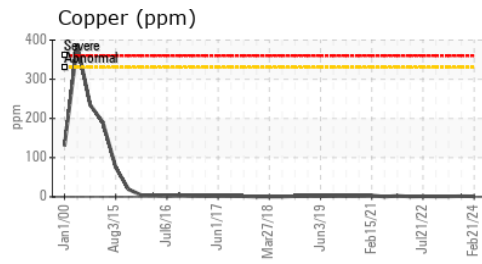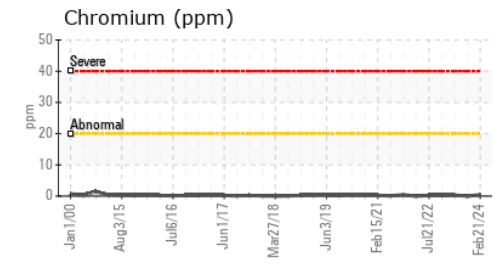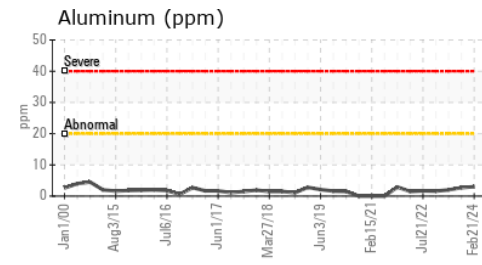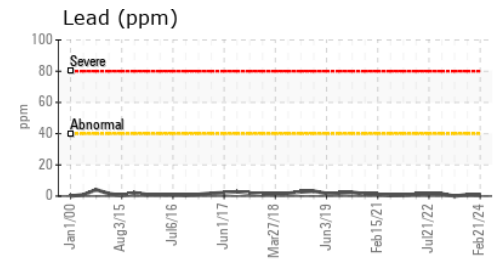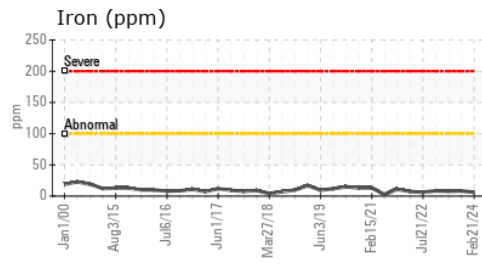

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111565 **Received** : 21 Mar 2024
Lab Number : 06125128 **Tested** : 25 Mar 2024
Unique Number : 10939279 **Diagnosed** : 25 Mar 2024 - Sean Felton
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

BROWN BUS COMPANY - UPSTATE TRANSIT
 50 VENNERS ROAD
 AMSTERDAM, NY
 US 12010
 Contact: CONNIE WILBUR
 cwilbur@browncoach.com
 T: (518)843-4700
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)