




OIL ANALYSIS REPORT

Sample Rating Trend

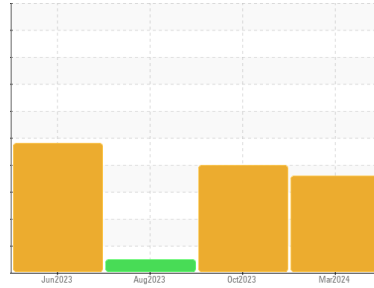

Machine Id
727146
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal.

Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0084811	GFL0084858	GFL0084833
Sample Date	Client Info	14 Mar 2024	20 Oct 2023	04 Aug 2023
Machine Age	hrs	17107	16009	15935
Oil Age	hrs	17107	15935	15152
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	0.0	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	▲ 124	78	20
Chromium	ppm ASTM D5185m >5	4	3	<1
Nickel	ppm ASTM D5185m >2	1	<1	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	6	4	1
Lead	ppm ASTM D5185m >30	3	<1	0
Copper	ppm ASTM D5185m >150	4	3	<1
Tin	ppm ASTM D5185m >5	<1	<1	<1
Vanadium	ppm ASTM D5185m	<1	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	6	4	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	68	58	56
Manganese	ppm ASTM D5185m 0	1	<1	<1
Magnesium	ppm ASTM D5185m 1010	1035	949	1011
Calcium	ppm ASTM D5185m 1070	1202	1157	1146
Phosphorus	ppm ASTM D5185m 1150	1175	1035	1012
Zinc	ppm ASTM D5185m 1270	1376	1230	1317
Sulfur	ppm ASTM D5185m 2060	2938	2585	3649

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	▲ 21	▲ 33	17
Sodium	ppm ASTM D5185m	37	● 94	8
Potassium	ppm ASTM D5185m >20	10	● 35	2

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	2.4	1.9	0.6
Nitration	Abs/cm *ASTM D7624 >20	18.9	16.4	9.4
Sulfation	Abs/.1mm *ASTM D7415 >30	35.2	31.8	20.3


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	39.0	33.6	17.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 2.2	5.2	8.2




OIL ANALYSIS REPORT


▲ Silicon (ppm)

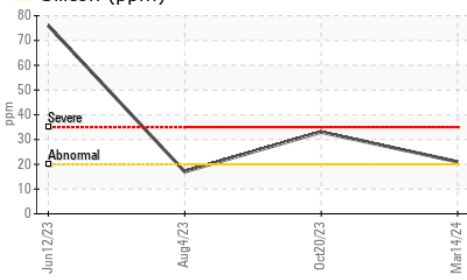


▲ Ferrous Alloys

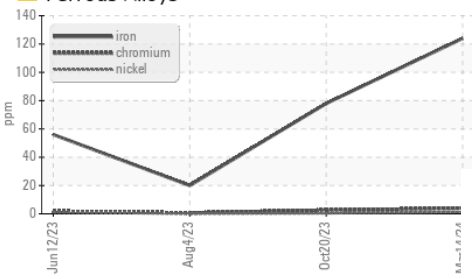

▲ Silicon (ppm)

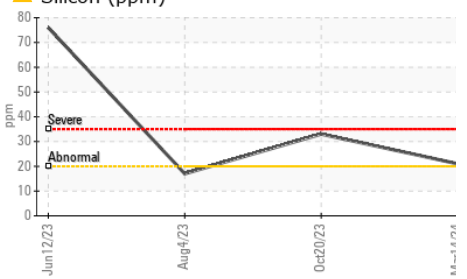

Viscosity @ 100°C

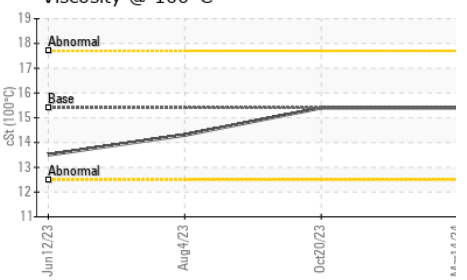


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	15.4	14.3

GRAPHS


▲ Ferrous Alloys

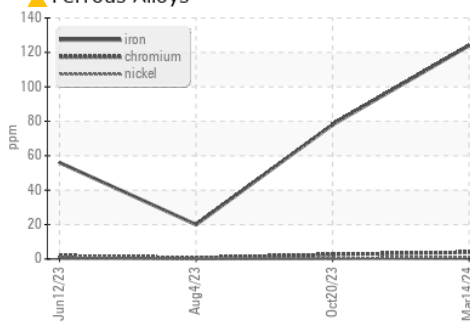


Non-ferrous Metals

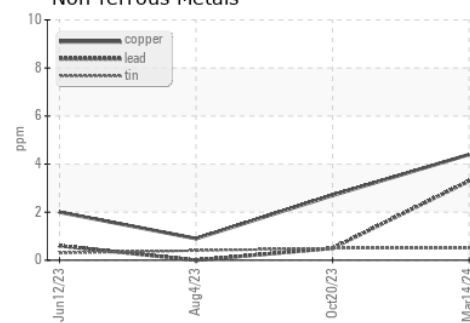

Viscosity @ 100°C

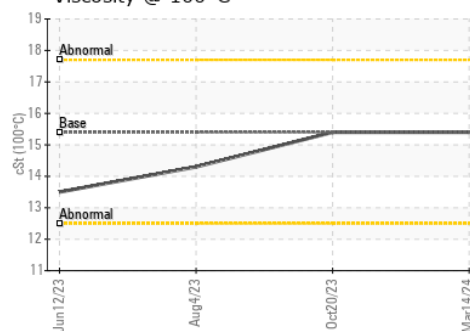

▲ Base Number

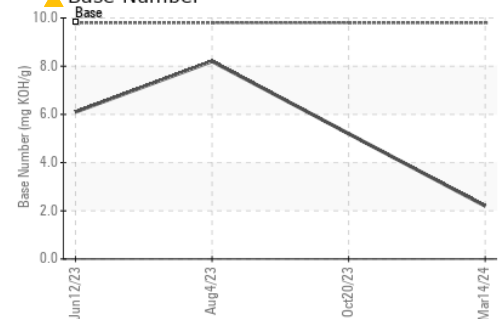

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0084811
Lab Number : 06125501
Unique Number : 10939652
Test Package : FLEET

Received : 21 Mar 2024
Tested : 22 Mar 2024
Diagnosed : 25 Mar 2024 - Don Baldrige

GFL Environmental - 959A - Urbana HC
 4808 cunningham Rd
 Urbana, IL
 US 61802
 Contact: Kristine Tryon
 Ktryon@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: