


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

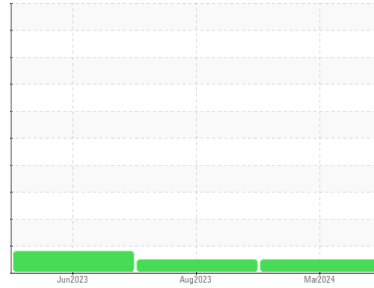

Area  
**Walgreens - Tractor**  
 Machine for  
**[Walgreens - Tractor] 136A63398**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0117289</b>	PCA0094374	PCA0094361
Sample Date	Client Info		<b>12 Mar 2024</b>	01 Aug 2023	04 Jun 2023
Machine Age	mls	Client Info	<b>160338</b>	113085	50079
Oil Age	mls	Client Info	<b>160338</b>	113085	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	0.0

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>33</b>	45	57
Chromium	ppm	ASTM D5185m >5	<b>4</b>	4	3
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>16</b>	32	57
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >150	<b>54</b>	125	▲ 160
Tin	ppm	ASTM D5185m >5	<b>1</b>	2	3
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>1</b>	5	25
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>67</b>	61	46
Manganese	ppm	ASTM D5185m 0	<b>1</b>	2	5
Magnesium	ppm	ASTM D5185m 950	<b>953</b>	919	569
Calcium	ppm	ASTM D5185m 1050	<b>1298</b>	1347	1872
Phosphorus	ppm	ASTM D5185m 995	<b>1056</b>	940	707
Zinc	ppm	ASTM D5185m 1180	<b>1316</b>	1199	896
Sulfur	ppm	ASTM D5185m 2600	<b>2359</b>	2373	2213

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>10</b>	11	11
Sodium	ppm	ASTM D5185m	<b>1</b>	3	11
Potassium	ppm	ASTM D5185m >20	<b>36</b>	75	146



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.7	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.9</b>	11.0	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.8</b>	22.6	24.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.7</b>	22.4	26.5
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.7</b>	5.5	7.0





# OIL ANALYSIS REPORT

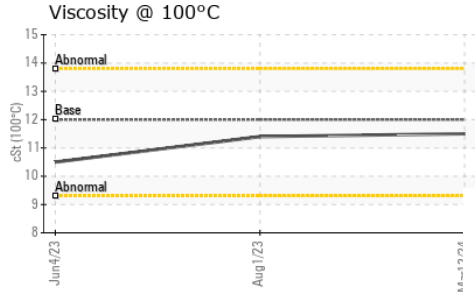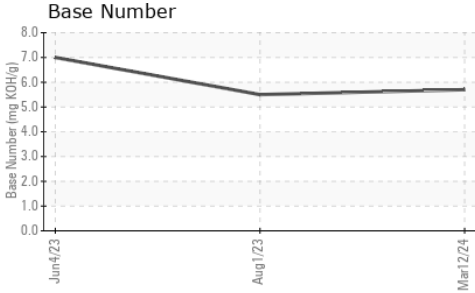

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.4	10.5

## GRAPHS

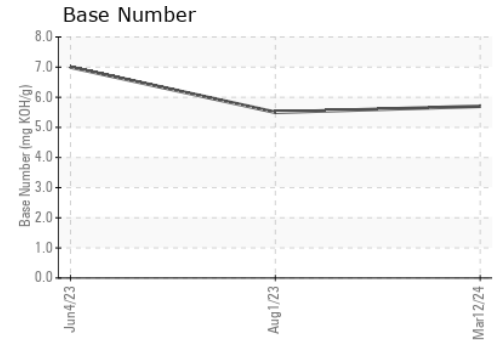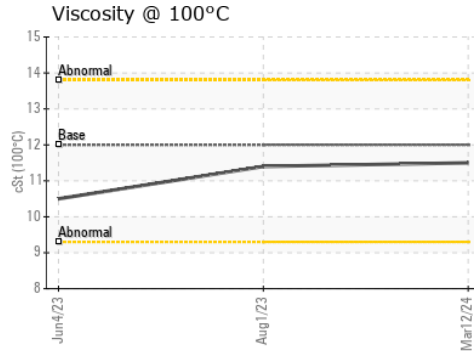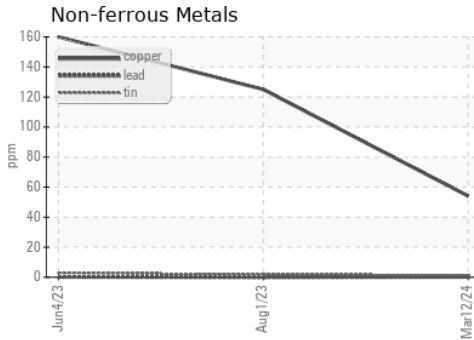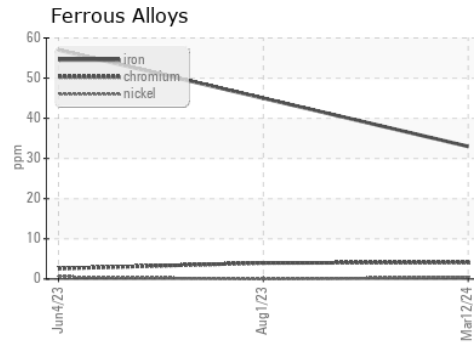

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117289  
**Lab Number** : **06125525**  
**Unique Number** : 10939676  
**Test Package** : FLEET

**Received** : 21 Mar 2024  
**Tested** : 22 Mar 2024  
**Diagnosed** : 22 Mar 2024 - Wes Davis

**Transervice - Shop 1363 - Berkeley-Orlando**  
 2455 Premier Row  
 Orlando, FL  
 US 32809

Contact: James Bennett  
jbennett@transervice.com

T: (407)856-8590  
F: (407)856-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)