




OIL ANALYSIS REPORT

Sample Rating Trend

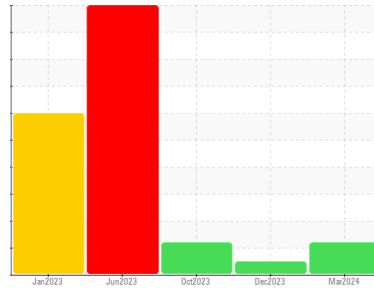

DEGRADATION



Machine Id
423078
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0106915	GFL0092097	GFL0084605
Sample Date	Client Info	19 Mar 2024	07 Dec 2023	01 Oct 2023
Machine Age	hrs	15459	14861	0
Oil Age	hrs	154198	600	0
Oil Changed	Client Info	Changed	Changed	N/A
Sample Status		ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	18	17	11
Chromium	ppm ASTM D5185m >5	1	1	1
Nickel	ppm ASTM D5185m >2	<1	<1	0
Titanium	ppm ASTM D5185m	<1	<1	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	2	2	0
Lead	ppm ASTM D5185m >30	<1	<1	18
Copper	ppm ASTM D5185m >150	24	44	3
Tin	ppm ASTM D5185m >5	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	3	8	23
Barium	ppm ASTM D5185m 0	0	3	0
Molybdenum	ppm ASTM D5185m 60	58	57	60
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	552	564	681
Calcium	ppm ASTM D5185m 1070	1637	1578	1844
Phosphorus	ppm ASTM D5185m 1150	710	669	861
Zinc	ppm ASTM D5185m 1270	1002	979	1095
Sulfur	ppm ASTM D5185m 2060	2390	2544	2569

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	5	5	5
Sodium	ppm ASTM D5185m	18	25	8
Potassium	ppm ASTM D5185m >20	15	29	0

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	11.0	10.3	13.0
Sulfation	Abs/.1mm *ASTM D7415 >30	22.8	22.2	28.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.9	19.1	28.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 3.6	4.6	▲ 3.8








OIL ANALYSIS REPORT

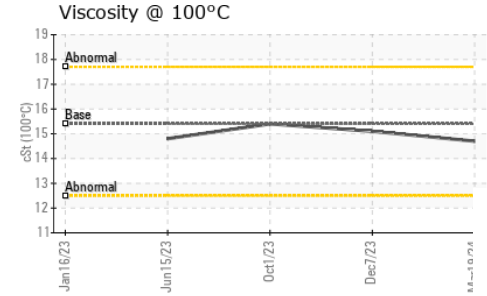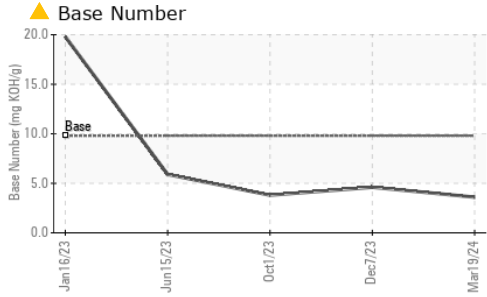

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.7	15.1	15.4

GRAPHS

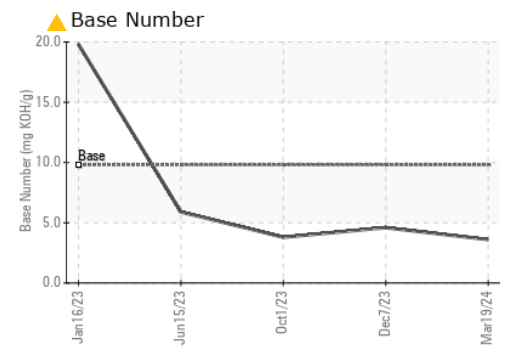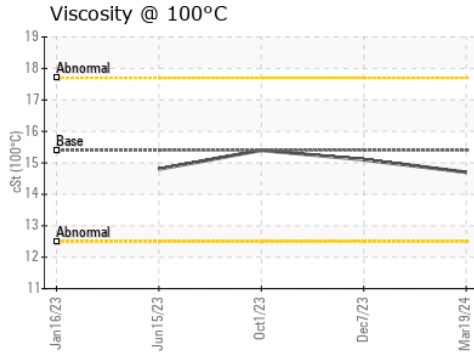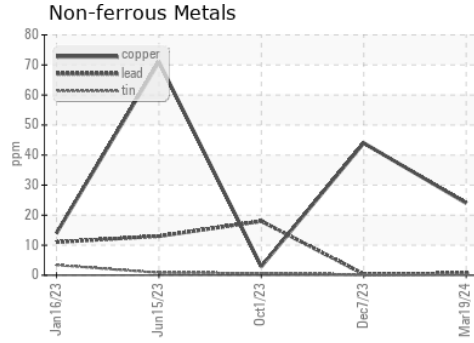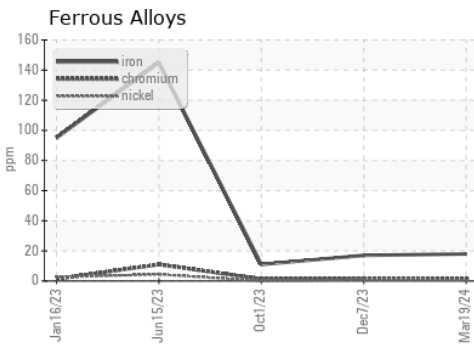

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0106915 **Received** : 22 Mar 2024
Lab Number : **06126131** **Tested** : 22 Mar 2024
Unique Number : 10940282 **Diagnosed** : 26 Mar 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 856 - Houston South
 8515 Highway 6 South
 Houston, TX
 US 77083
 Contact: Apolinar Zacarias
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)