




# OIL ANALYSIS REPORT

Sample Rating Trend

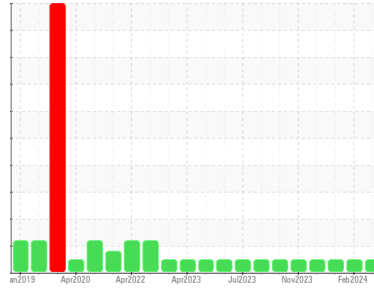

**NORMAL**



Machine Id  
**428058-402378**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0105115</b>	GFL0105244	GFL0105320
Sample Date	Client Info		<b>19 Mar 2024</b>	26 Feb 2024	02 Feb 2024
Machine Age	hrs	Client Info	<b>13668</b>	13529	13374
Oil Age	hrs	Client Info	<b>300</b>	300	600
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>11</b>	9	10
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	1	1
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	3	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	72	56
Manganese	ppm	ASTM D5185m 0	<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>915</b>	1092	901
Calcium	ppm	ASTM D5185m 1070	<b>1058</b>	1206	978
Phosphorus	ppm	ASTM D5185m 1150	<b>1034</b>	1050	973
Zinc	ppm	ASTM D5185m 1270	<b>1218</b>	1417	1196
Sulfur	ppm	ASTM D5185m 2060	<b>2936</b>	3775	2919

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>2</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	3

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.4</b>	6.3	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	18.5	19.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.7</b>	13.8	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.8</b>	8.2	7.9







# OIL ANALYSIS REPORT

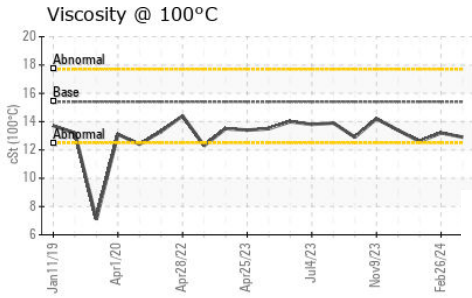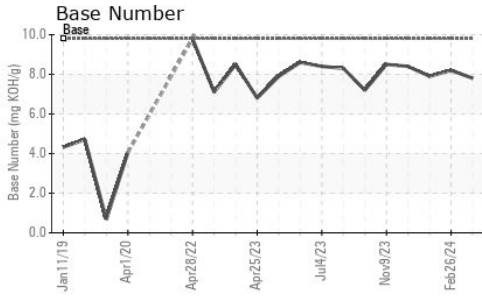

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	13.2

## GRAPHS

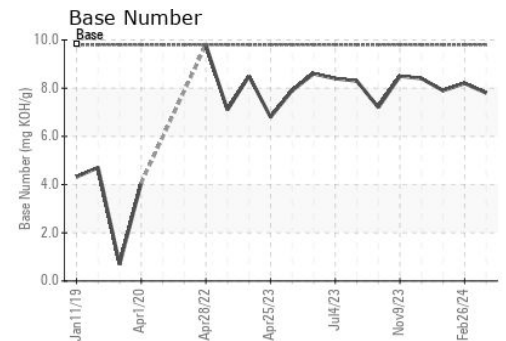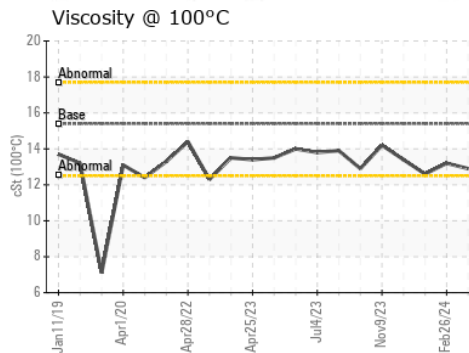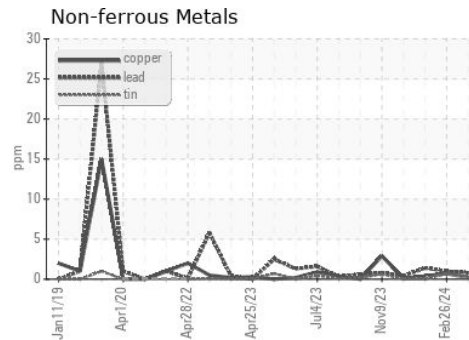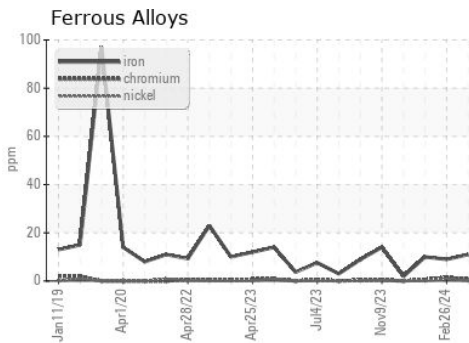

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0105115  
 Lab Number : 06126167  
 Unique Number : 10940318  
 Test Package : FLEET

Received : 22 Mar 2024  
 Tested : 22 Mar 2024  
 Diagnosed : 22 Mar 2024 - Wes Davis

GFL Environmental - 821 - Ozarks Hauling  
 33924 Olath Drive  
 Lebanon, MO  
 US 65536

Contact: Landen Johnson  
 landen.johnson@gflenv.com  
 T: (417)664-0010

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: