




OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Machine Id
710015
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (25 GAL)

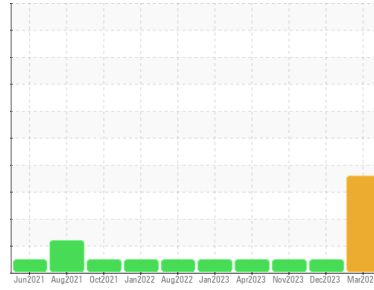

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Fuel content negligible.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0108729	GFL0105654	GFL0101591
Sample Date	Client Info		20 Mar 2024	07 Dec 2023	18 Nov 2023
Machine Age	hrs	Client Info	10232	9642	9503
Oil Age	hrs	Client Info	0	9503	7933
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	55	27	24
Chromium	ppm	ASTM D5185m >20	2	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	0	<1
Titanium	ppm	ASTM D5185m >2	<1	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	▲ 23	11	9
Lead	ppm	ASTM D5185m >40	1	0	<1
Copper	ppm	ASTM D5185m >330	2	1	2
Tin	ppm	ASTM D5185m >15	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	10	2	0
Barium	ppm	ASTM D5185m 0	0	0	9
Molybdenum	ppm	ASTM D5185m 60	100	59	61
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	1302	936	899
Calcium	ppm	ASTM D5185m 1070	1416	1083	1078
Phosphorus	ppm	ASTM D5185m 1150	1321	907	1012
Zinc	ppm	ASTM D5185m 1270	1731	1264	1213
Sulfur	ppm	ASTM D5185m 2060	3848	3231	3009

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	16	4	5
Sodium	ppm	ASTM D5185m	▲ 595	4	2
Potassium	ppm	ASTM D5185m >20	▲ 38	14	16
Fuel	%	ASTM D3524 >3.0	0.7	<1.0	<1.0
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.6	0.5	0.5
Nitration	Abs/cm	*ASTM D7624 >20	10.5	9.3	9.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.2	20.4	20.3


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.5	17.0	17.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.6	7.7	8.5




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

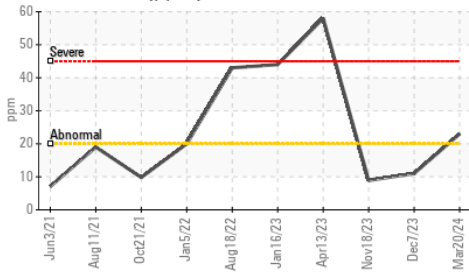


▲ Fuel Dilution

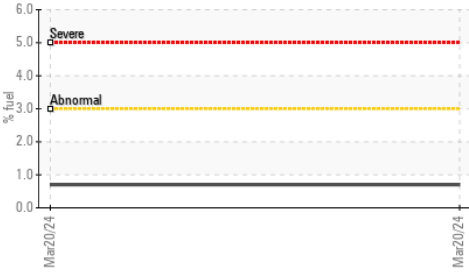


Glycol Contamination

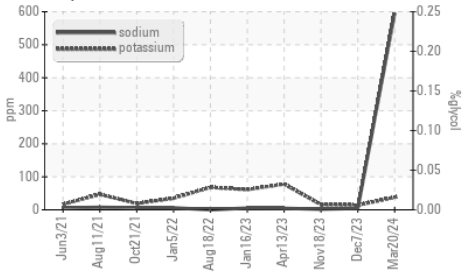

Base Number

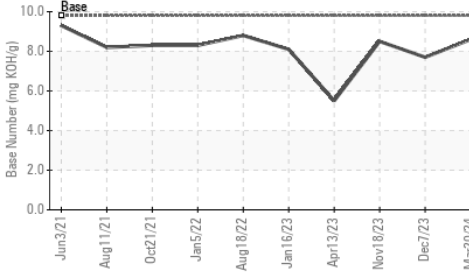

Glycol Contamination

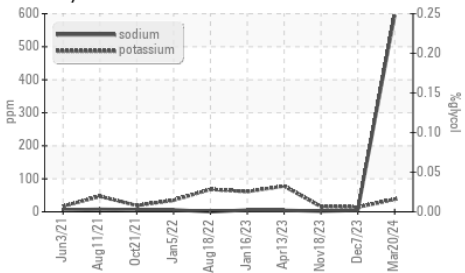


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	● 11.06	13.9	13.7

GRAPHS


Ferrous Alloys

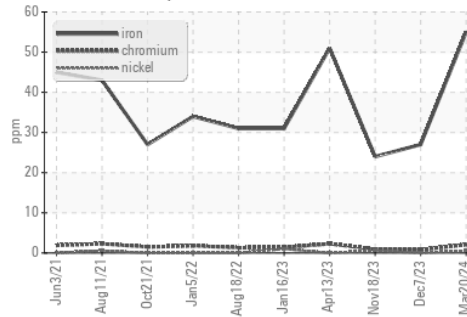


Non-ferrous Metals

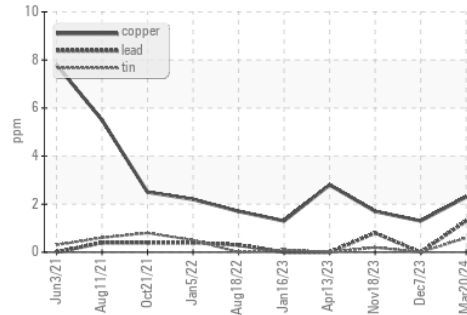

● Viscosity @ 100°C

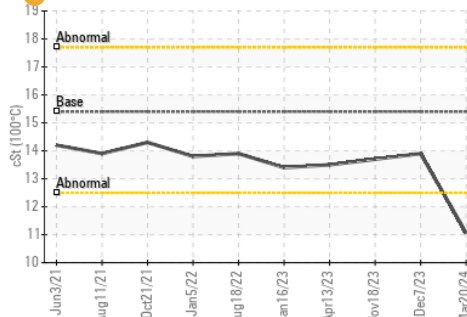

Base Number

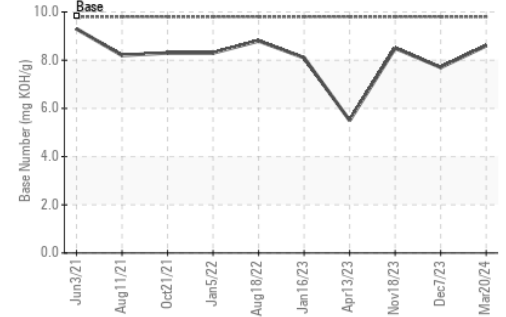

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0108729 Received : 22 Mar 2024
 Lab Number : 06126187 Tested : 02 Apr 2024
 Unique Number : 10940338 Diagnosed : 02 Apr 2024 - Jonathan Hester
 Test Package : FLEET (Additional Tests: FuelDilution, Glycol, PercentFuel)

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)