




# OIL ANALYSIS REPORT

Sample Rating Trend

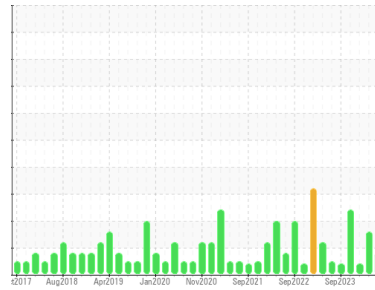

FUEL



Machine Id  
**3743**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0111554</b>	GFL06096096	GFL0074638
Sample Date	Client Info	<b>20 Mar 2024</b>	20 Feb 2024	13 Nov 2023
Machine Age	hrs	<b>0</b>	20454	19937
Oil Age	hrs	<b>0</b>	0	59
Oil Changed	Client Info	<b>Changed</b>	Changed	Not Chngd
Sample Status		<b>MARGINAL</b>	ABNORMAL	ATTENTION

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>15</b>	52	10
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	2	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>1</b>	3	1
Lead	ppm ASTM D5185m >25	<b>0</b>	0	0
Copper	ppm ASTM D5185m >100	<b>7</b>	2	<1
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>4</b>	4	6
Barium	ppm ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 100	<b>54</b>	49	46
Manganese	ppm ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 450	<b>864</b>	660	646
Calcium	ppm ASTM D5185m 3000	<b>1040</b>	▲ 735	720
Phosphorus	ppm ASTM D5185m 1150	<b>963</b>	761	774
Zinc	ppm ASTM D5185m 1350	<b>1135</b>	911	896
Sulfur	ppm ASTM D5185m 4250	<b>3292</b>	2127	2252

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	8	3
Sodium	ppm ASTM D5185m >158	<b>5</b>	11	3
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	1
Fuel	% ASTM D3524 >3.0	▲ <b>2.2</b>	▲ 3.8	0.3

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.5</b>	1.5	1.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.4</b>	9.6	5.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.6</b>	19.9	17.8

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.5</b>	12.9	9.5
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>7.6</b>	5.4	8.1







# OIL ANALYSIS REPORT

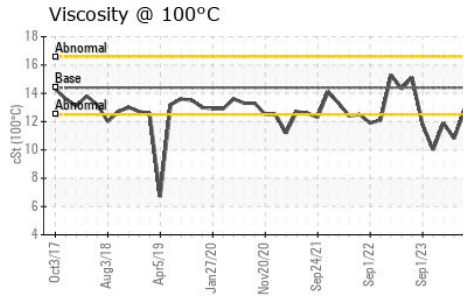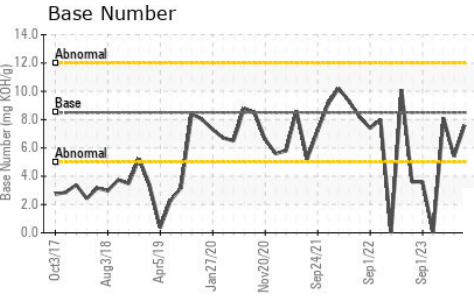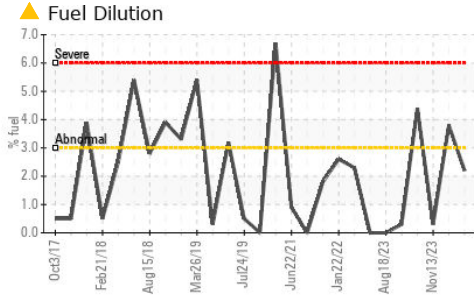

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	▲ 10.8 ● 11.9

## GRAPHS

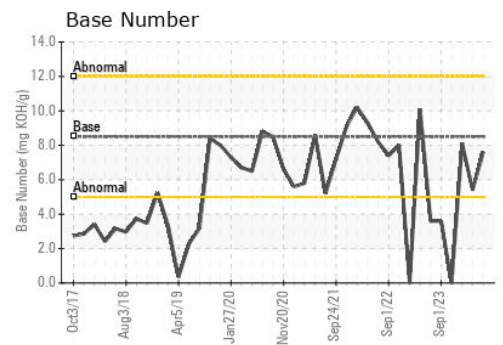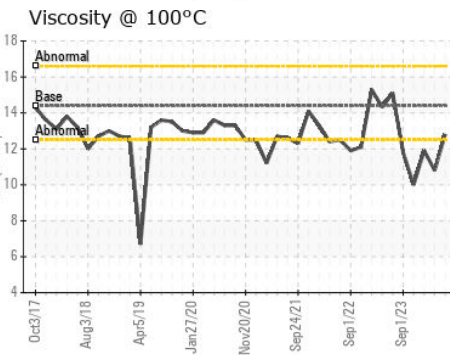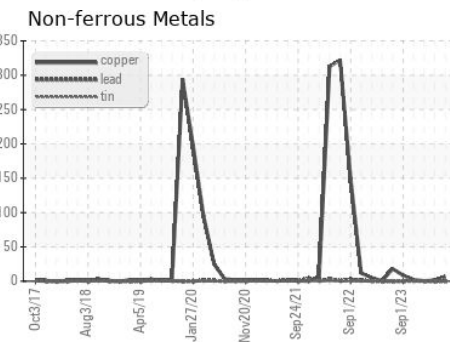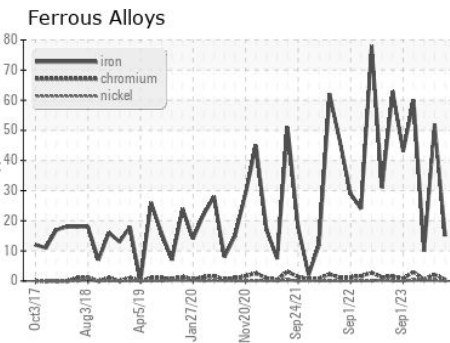

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111554

Lab Number : 06127395

Unique Number : 10941546

Test Package : FLEET ( Additional Tests: PercentFuel )

Received : 25 Mar 2024

Tested : 27 Mar 2024

Diagnosed : 27 Mar 2024 - Wes Davis

GFL Environmental - 095 - Atlanta West

2699 Cochran Industrial Blvd

Douglasville, GA

US 30127-1332

Contact: Darrell Welch

darrell.welch@gflenv.com

T: (800)207-6618

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)