




OIL ANALYSIS REPORT

Sample Rating Trend

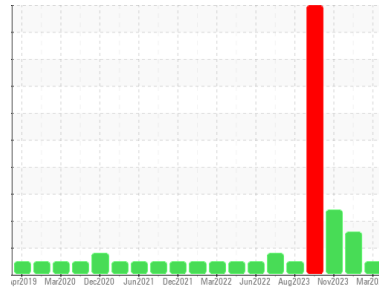

NORMAL



Area
(YA150042)

Machine Id
3843C

Component
Natural Gas Engine

Fluid
CHEVRON DELO 400 NG (46 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0090036 | GFL0090014 | GFL0099792 |
| Sample Date | Client Info | | 22 Mar 2024 | 05 Mar 2024 | 20 Nov 2023 |
| Machine Age | hrs | Client Info | 1466 | 1466 | 1466 |
| Oil Age | hrs | Client Info | 0 | 0 | 7641 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | ABNORMAL | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | 7 | 10 | 31 |
| Chromium | ppm | ASTM D5185m >4 | 1 | 0 | 2 |
| Nickel | ppm | ASTM D5185m >2 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m >3 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >9 | 2 | 2 | 3 |
| Lead | ppm | ASTM D5185m >30 | 2 | 0 | 22 |
| Copper | ppm | ASTM D5185m >35 | 5 | 6 | 2 |
| Tin | ppm | ASTM D5185m >4 | 1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | <1 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-----------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 33 | 29 | 10 |
| Barium | ppm | ASTM D5185m | 1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 54 | 52 | 61 |
| Manganese | ppm | ASTM D5185m | 1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 470 | 566 | 670 |
| Calcium | ppm | ASTM D5185m | 1534 | 1475 | 1889 |
| Phosphorus | ppm | ASTM D5185m 800 | 734 | 763 | 920 |
| Zinc | ppm | ASTM D5185m 880 | 917 | 902 | 1147 |
| Sulfur | ppm | ASTM D5185m | 2467 | 2276 | 2657 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185m >+100 | 8 | 8 | 10 |
| Sodium | ppm | ASTM D5185m | 10 | 18 | ▲ 88 |
| Potassium | ppm | ASTM D5185m >20 | 55 | ▲ 99 | ▲ 116 |
| Glycol | % | *ASTM D2982 | --- | --- | --- |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | 0 | 0 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 8.8 | 9.6 | 12.8 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 19.7 | 19.5 | 28.7 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 16.8 | 16.8 | 24.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 6.1 | 6.8 | 6.5 | 3.5 |




OIL ANALYSIS REPORT


Glycol Contamination

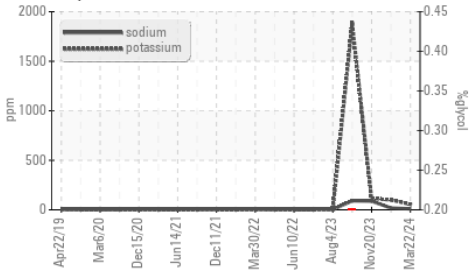

Viscosity @ 100°C

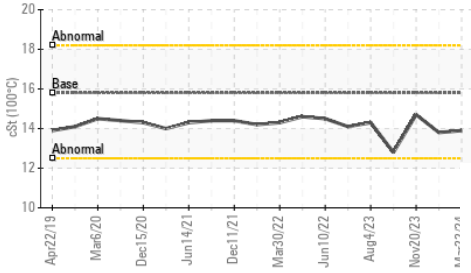

Glycol Contamination

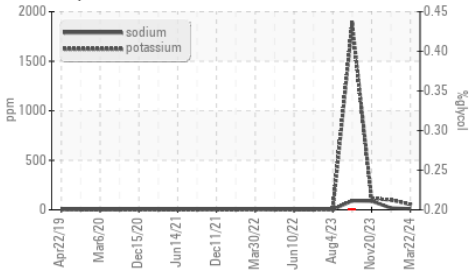


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D445 | 15.8 | 13.9 | 13.8 | 14.7 |

GRAPHS


Ferrous Alloys

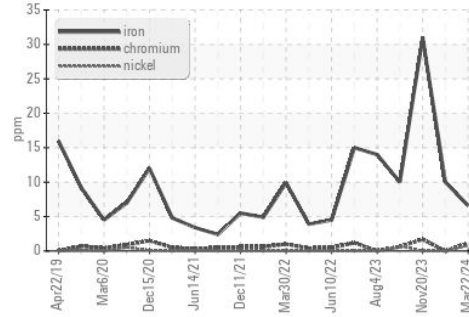


Non-ferrous Metals

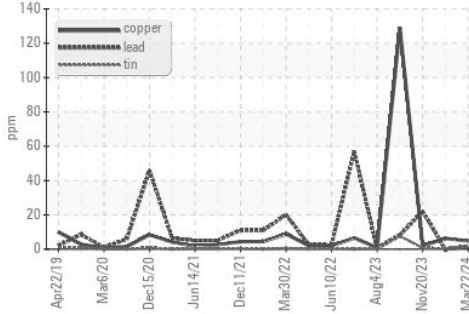

Viscosity @ 100°C

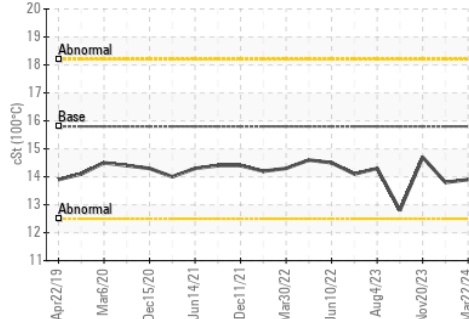

Base Number

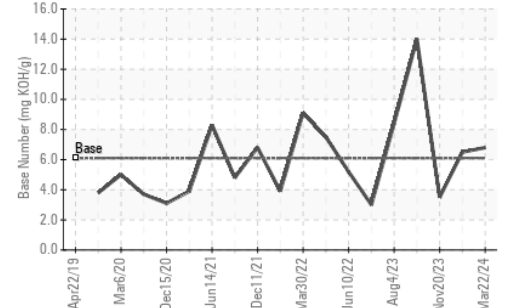

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0090036 **Received** : 25 Mar 2024
Lab Number : **06127496** **Tested** : 27 Mar 2024
Unique Number : 10941647 **Diagnosed** : 27 Mar 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 018 - Fayetteville
 4621 Marracco Drive
 Hope Mills, NC
 US 28348
 Contact: Robert Carter
 robert.carter@gflenv.com
 T: (910)596-1170
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)