




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Area
(YA172365) {UNASSIGNED}
 Machine Id
913177
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (8 GAL)

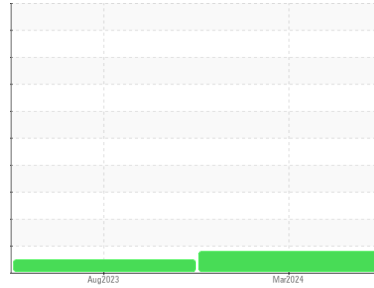

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0090040	GFL0080569	---
Sample Date	Client Info		22 Mar 2024	23 Aug 2023	---
Machine Age	hrs	Client Info	1726	0	---
Oil Age	hrs	Client Info	1726	0	---
Oil Changed	Client Info		Not Chngd	Changed	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	38	17	---
Chromium	ppm	ASTM D5185m >20	2	<1	---
Nickel	ppm	ASTM D5185m >5	▲ 11	<1	---
Titanium	ppm	ASTM D5185m >2	<1	0	---
Silver	ppm	ASTM D5185m >2	<1	<1	---
Aluminum	ppm	ASTM D5185m >20	4	6	---
Lead	ppm	ASTM D5185m >40	1	0	---
Copper	ppm	ASTM D5185m >330	30	11	---
Tin	ppm	ASTM D5185m >15	2	1	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	3	12	---
Barium	ppm	ASTM D5185m 10	1	0	---
Molybdenum	ppm	ASTM D5185m 100	65	69	---
Manganese	ppm	ASTM D5185m	3	1	---
Magnesium	ppm	ASTM D5185m 450	892	1013	---
Calcium	ppm	ASTM D5185m 3000	1108	1176	---
Phosphorus	ppm	ASTM D5185m 1150	975	1059	---
Zinc	ppm	ASTM D5185m 1350	1216	1308	---
Sulfur	ppm	ASTM D5185m 4250	2752	3689	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	10	10	---
Sodium	ppm	ASTM D5185m >216	8	3	---
Potassium	ppm	ASTM D5185m >20	14	5	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.7	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	10.1	7.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.2	19.7	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.3	15.5	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	5.8	8.2	---



OIL ANALYSIS REPORT


▲ Ferrous Alloys

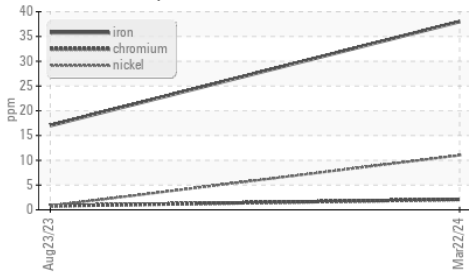

Base Number



Viscosity @ 100°C

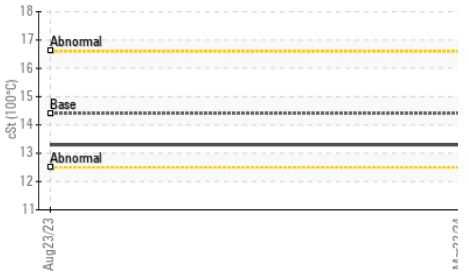


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	---

GRAPHS

▲ Ferrous Alloys

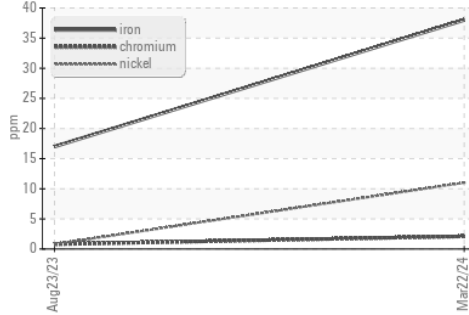


Non-ferrous Metals

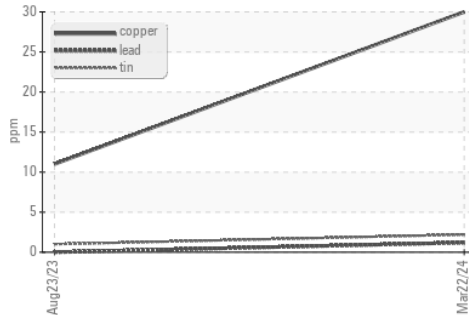

Viscosity @ 100°C



Base Number

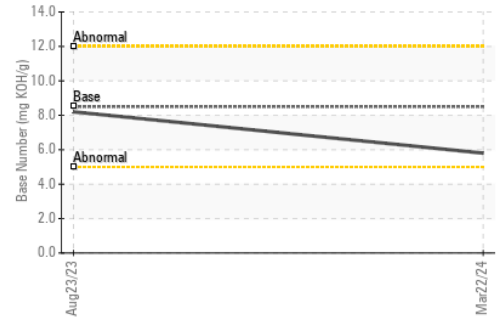

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0090040
 Lab Number : 06127507
 Unique Number : 10941658
 Test Package : FLEET

Received : 25 Mar 2024
 Tested : 26 Mar 2024
 Diagnosed : 27 Mar 2024 - Don Baldrige

GFL Environmental - 018 - Fayetteville
 4621 Marracco Drive
 Hope Mills, NC
 US 28348
 Contact: CHRIS HALL
 christopherh@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: