


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

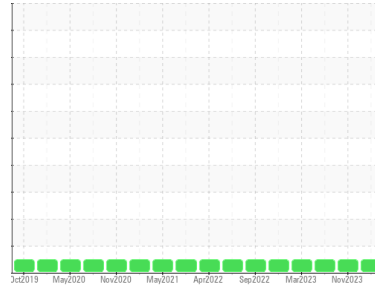

Area
FLEET
Machine Id
Volvo 1926709
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (40 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0119899	PCA0108216	PCA0099306	
Sample Date	Client Info	14 Mar 2024	30 Nov 2023	10 Aug 2023	
Machine Age	mls	Client Info	459913	439708	419491
Oil Age	mls	Client Info	40422	20217	49881
Oil Changed	Client Info	Changed	Not Changd	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >6.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	36	13	35
Chromium	ppm ASTM D5185m >20	2	<1	1
Nickel	ppm ASTM D5185m >2	2	<1	<1
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >2	<1	<1	<1
Aluminum	ppm ASTM D5185m >25	8	3	4
Lead	ppm ASTM D5185m >40	2	0	2
Copper	ppm ASTM D5185m >330	20	14	6
Tin	ppm ASTM D5185m >15	2	<1	2
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<1	2	2
Barium	ppm ASTM D5185m 0	1	0	0
Molybdenum	ppm ASTM D5185m 50	64	56	59
Manganese	ppm ASTM D5185m 0	2	<1	<1
Magnesium	ppm ASTM D5185m 950	883	911	950
Calcium	ppm ASTM D5185m 1050	1070	1014	1087
Phosphorus	ppm ASTM D5185m 995	850	993	984
Zinc	ppm ASTM D5185m 1180	1156	1214	1275
Sulfur	ppm ASTM D5185m 2600	2462	2804	3241

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	4	6
Sodium	ppm ASTM D5185m	10	7	20
Potassium	ppm ASTM D5185m >20	10	3	3



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.7	0.4	0.7
Nitration	Abs/cm *ASTM D7624 >20	11.1	8.4	11.3
Sulfation	Abs/.1mm *ASTM D7415 >30	22.6	19.8	23.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.7	16.4	20.7
Base Number (BN)	mg KOH/g ASTM D2896	5.2	7.5	5.1





OIL ANALYSIS REPORT

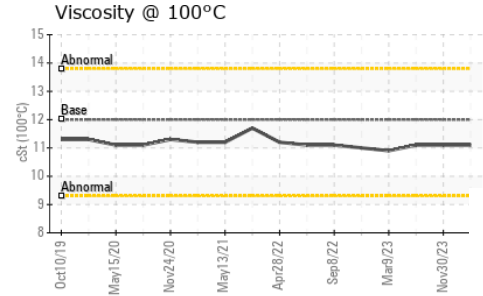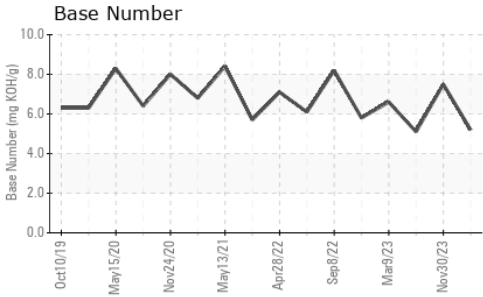

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.1	11.1

GRAPHS

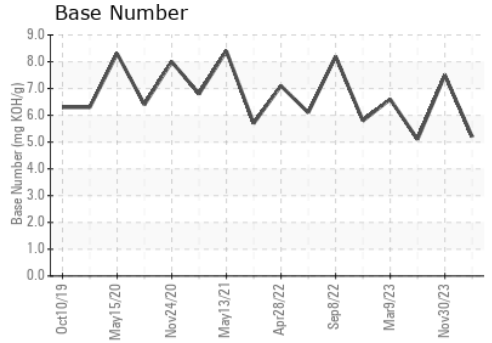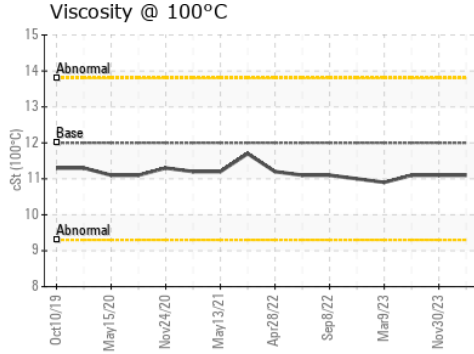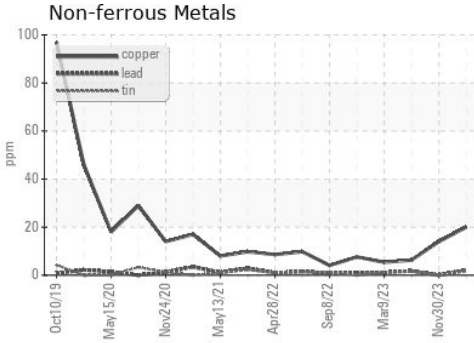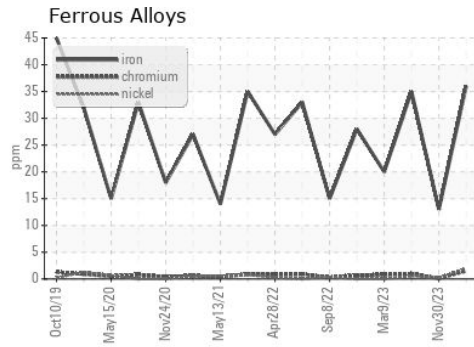

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119899 **Received** : 25 Mar 2024
Lab Number : **06127512** **Tested** : 26 Mar 2024
Unique Number : 10941663 **Diagnosed** : 26 Mar 2024 - Wes Davis
Test Package : FLEET

PERDUE FARMS - ACCOMAC
 22520 LANKFORD HWY
 ACCOMAC, VA
 US 23301
 Contact: PEGGY KIMES
 peggy.kimes@perdue.com
 T: (757)787-5304
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)