




# OIL ANALYSIS REPORT

Sample Rating Trend

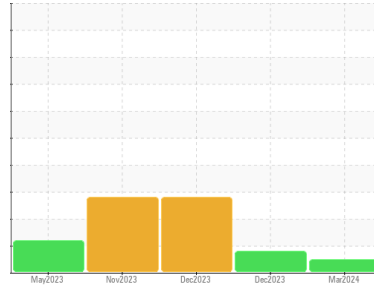

**NORMAL**



Machine Id  
**4548M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108757</b>	GFL0105742	GFL0105590
Sample Date	Client Info	<b>21 Mar 2024</b>	19 Dec 2023	11 Dec 2023
Machine Age	hrs	<b>9731</b>	9604	9540
Oil Age	hrs	<b>9604</b>	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Not Chngd
Sample Status		<b>NORMAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>3</b>	22	5
Chromium	ppm ASTM D5185m >20	<b>0</b>	1	<1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	2	<1
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>0</b>	<1	7
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	0	16
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>56</b>	55	47
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>970</b>	898	805
Calcium	ppm ASTM D5185m 1070	<b>1106</b>	1012	889
Phosphorus	ppm ASTM D5185m 1150	<b>1083</b>	999	856
Zinc	ppm ASTM D5185m 1270	<b>1264</b>	1203	993
Sulfur	ppm ASTM D5185m 2060	<b>3798</b>	2920	2523

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>2</b>	6	6
Sodium	ppm ASTM D5185m	<b>1</b>	5	2
Potassium	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Fuel	% ASTM D3524 >3.0	<b>0.4</b>	▲ 3.5	▲ 18.8

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.3</b>	0.6	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>5.6</b>	8.6	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.2</b>	20.4	18.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.9</b>	16.5	15.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.5</b>	7.2	8.5







# OIL ANALYSIS REPORT

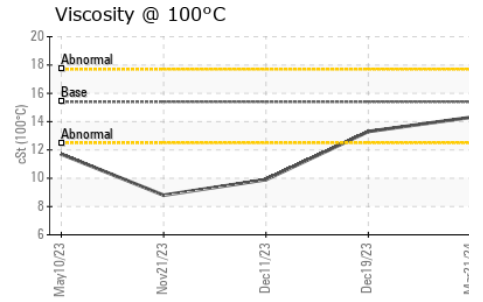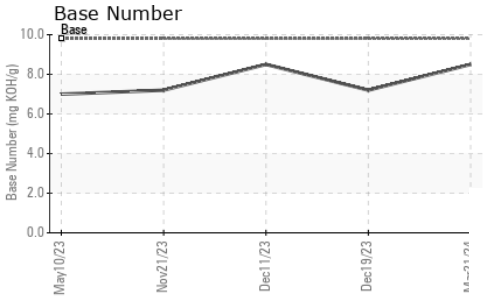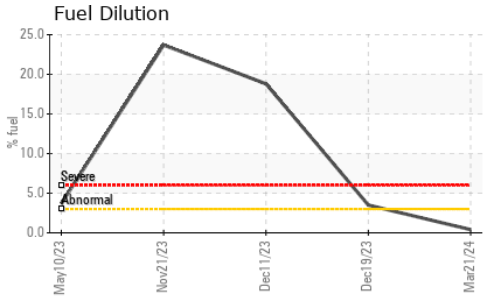

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.3</b>	13.3 ▲ 9.9

## GRAPHS

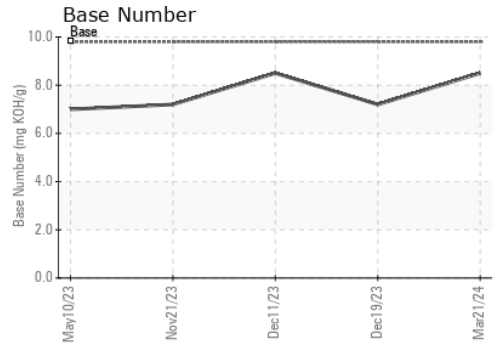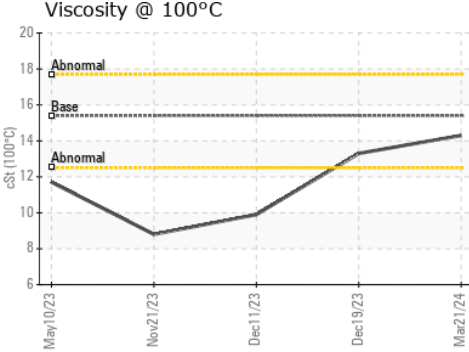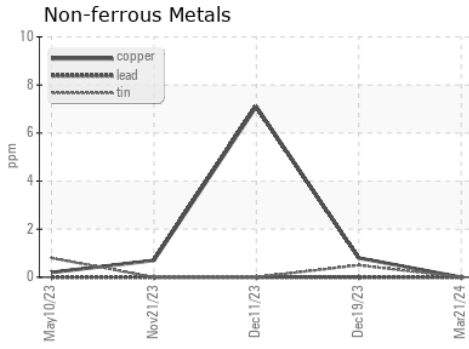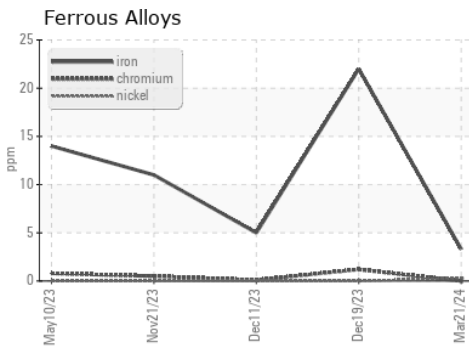

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108757 **Received** : 25 Mar 2024  
**Lab Number** : **06127559** **Tested** : 27 Mar 2024  
**Unique Number** : 10941710 **Diagnosed** : 27 Mar 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)