




# OIL ANALYSIS REPORT

Sample Rating Trend

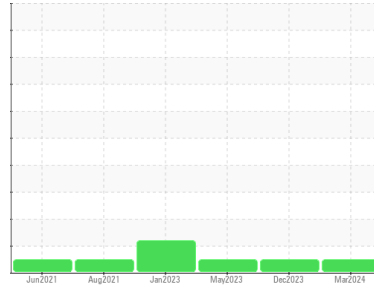

**NORMAL**



Machine Id  
**188M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0108738</b>  | GFL0105711  | GFL0081364  |
| Sample Date   | Client Info |             | <b>21 Mar 2024</b> | 18 Dec 2023 | 24 May 2023 |
| Machine Age   | hrs         | Client Info | <b>17511</b>       | 16300       | 15246       |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 15246       | 14662       |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Not Chngd   | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current  | history1 | history2 |
|----------|--------|------------------|----------|----------|----------|
| Iron     | ppm    | ASTM D5185m >90  | <b>7</b> | 4        | 59       |
| Chromium | ppm    | ASTM D5185m >20  | <b>0</b> | <1       | 5        |
| Nickel   | ppm    | ASTM D5185m >2   | <b>0</b> | 0        | <1       |
| Titanium | ppm    | ASTM D5185m >2   | <b>0</b> | 0        | 1        |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b> | 0        | <1       |
| Aluminum | ppm    | ASTM D5185m >20  | <b>3</b> | 2        | 17       |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b> | 0        | <1       |
| Copper   | ppm    | ASTM D5185m >330 | <b>0</b> | 12       | 10       |
| Tin      | ppm    | ASTM D5185m >15  | <b>0</b> | 0        | 1        |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b> | 0        | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b> | 0        | <1       |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 18       | 3        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>58</b>    | 60       | 60       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 1        |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>1010</b>  | 871      | 952      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1159</b>  | 972      | 1070     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1117</b>  | 858      | 967      |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1314</b>  | 1104     | 1226     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3960</b>  | 2911     | 2925     |

## CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>2</b>     | 9        | 17       |
| Sodium    | ppm    | ASTM D5185m     | <b>1</b>     | 0        | 55       |
| Potassium | ppm    | ASTM D5185m >20 | <b>&lt;1</b> | 1        | 4        |

## INFRA-RED



|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >6  | <b>0.2</b>  | 0.1      | 1.5      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>5.7</b>  | 4.5      | 9.0      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.1</b> | 17.8     | 22.2     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.0</b> | 13.3     | 16.2     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>8.9</b>  | 9.4      | 8.7      |







# OIL ANALYSIS REPORT

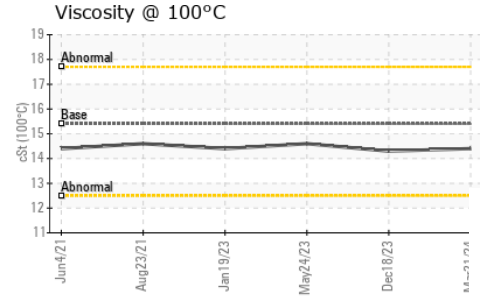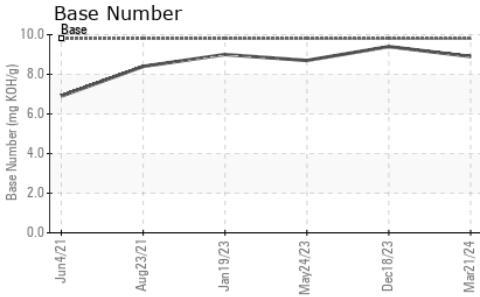

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>14.4</b> | 14.3     | 14.6 |

## GRAPHS

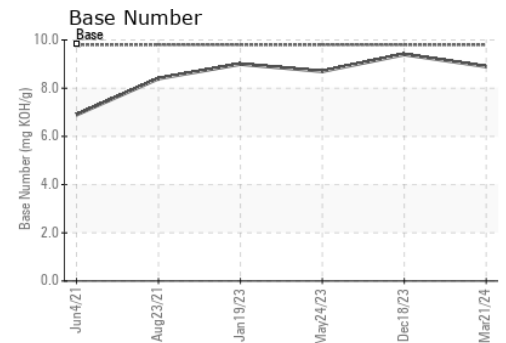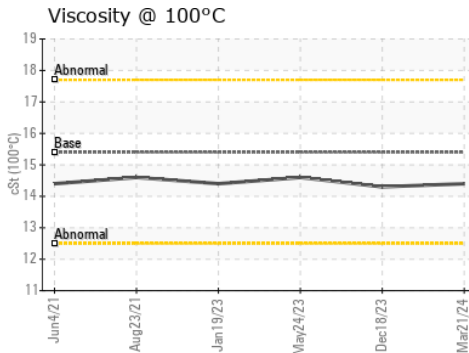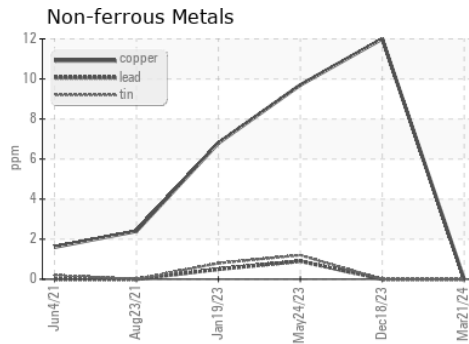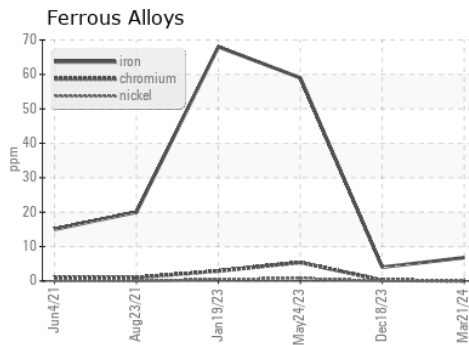

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108738  
**Lab Number** : **06127576**  
**Unique Number** : 10941727  
**Test Package** : FLEET

**Received** : 25 Mar 2024  
**Tested** : 26 Mar 2024  
**Diagnosed** : 26 Mar 2024 - Wes Davis

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)