




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

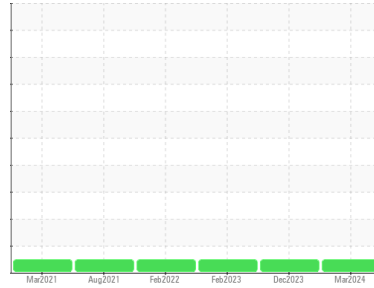

Machine Id  
**4599M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108736</b>	GFL0105706	GFL0073840
Sample Date	Client Info		<b>21 Mar 2024</b>	18 Dec 2023	23 Feb 2023
Machine Age	hrs	Client Info	<b>19426</b>	18838	18457
Oil Age	hrs	Client Info	<b>0</b>	18457	16431
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>6</b>	4	87
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>0</b>	12	3
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	18	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	61	65
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	1
Magnesium	ppm	ASTM D5185m 1010	<b>1010</b>	878	942
Calcium	ppm	ASTM D5185m 1070	<b>1152</b>	984	1198
Phosphorus	ppm	ASTM D5185m 1150	<b>1118</b>	846	1021
Zinc	ppm	ASTM D5185m 1270	<b>1302</b>	1113	1307
Sulfur	ppm	ASTM D5185m 2060	<b>3952</b>	2885	2885

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	9	10
Sodium	ppm	ASTM D5185m	<b>1</b>	0	10
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.2</b>	0.1	2.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.7</b>	4.5	12.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	17.8	25.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.3</b>	13.2	21.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.7</b>	8.7	7.1







# OIL ANALYSIS REPORT

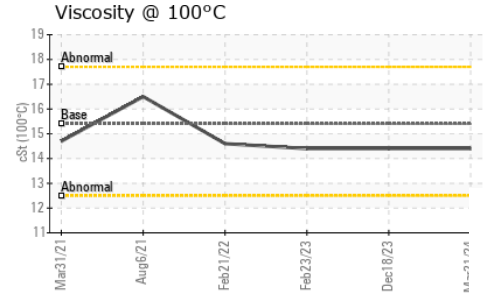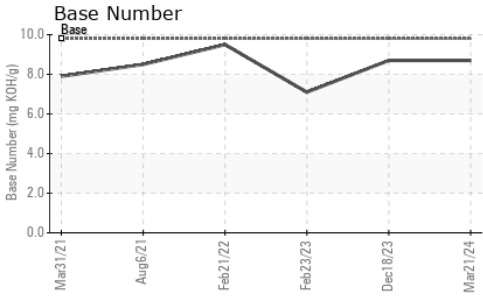

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.4	14.4

## GRAPHS

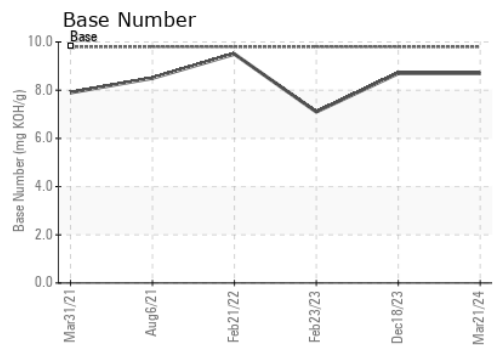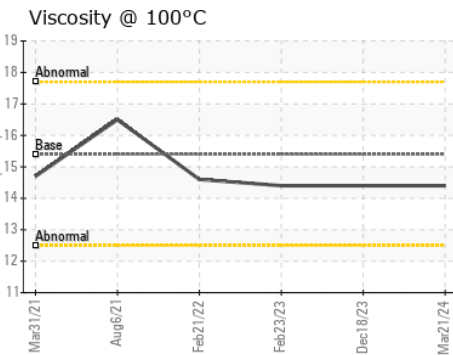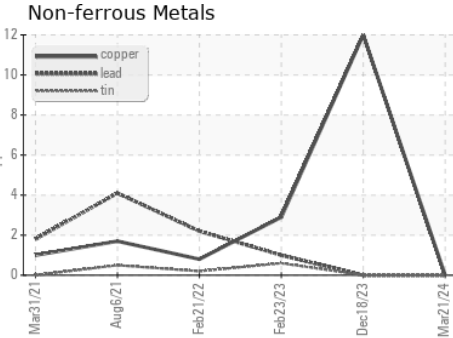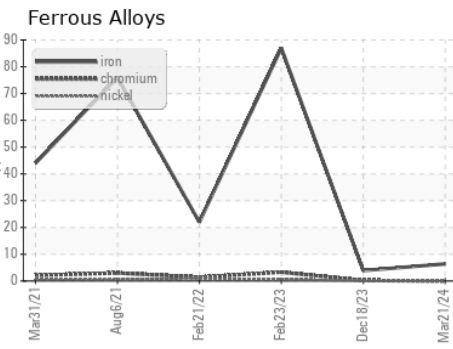

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108736 **Received** : 25 Mar 2024  
**Lab Number** : **06127577** **Tested** : 26 Mar 2024  
**Unique Number** : 10941728 **Diagnosed** : 26 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)