




# OIL ANALYSIS REPORT

Sample Rating Trend

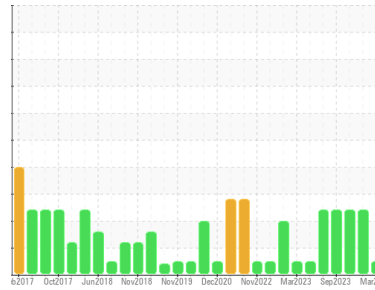

**NORMAL**



Area  
**180**  
Machine Id  
**2659**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0113703</b>	GFL0113694	GFL0111006
Sample Date	Client Info	<b>13 Mar 2024</b>	21 Feb 2024	09 Feb 2024
Machine Age	hrs	<b>30902</b>	30787	30818
Oil Age	hrs	<b>786</b>	0	702
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	SEVERE	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >120	<b>7</b>	63	37
Chromium	ppm	ASTM D5185m >20	<b>0</b>	1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	6	3
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>0</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>15</b>	174	111
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	122	74
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>949</b>	1051	673
Calcium	ppm	ASTM D5185m 1070	<b>1184</b>	1665	1089
Phosphorus	ppm	ASTM D5185m 1150	<b>1062</b>	1136	764
Zinc	ppm	ASTM D5185m 1270	<b>1270</b>	1463	942
Sulfur	ppm	ASTM D5185m 2060	<b>3840</b>	3894	2464

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>3</b>	11	6
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	1
Fuel	%	ASTM D3524 >3.0	<b>1.4</b>	▲ 11.0	▲ 9.5

## INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >4	<b>0.8</b>	1.8	1.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.2</b>	7.1	7.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	21.2	21.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.4</b>	13.2	13.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.8</b>	7.5	8.4







# OIL ANALYSIS REPORT

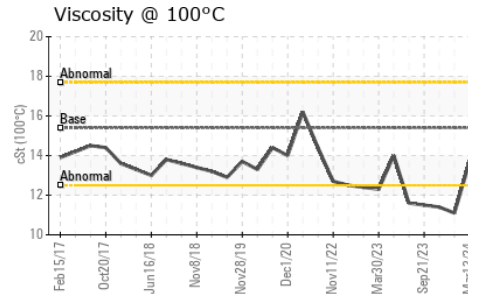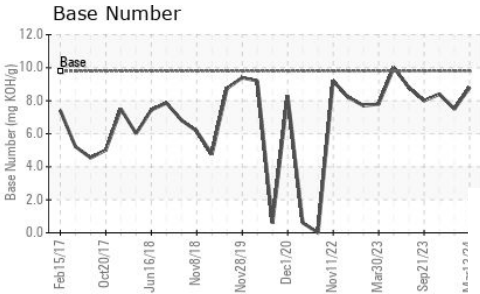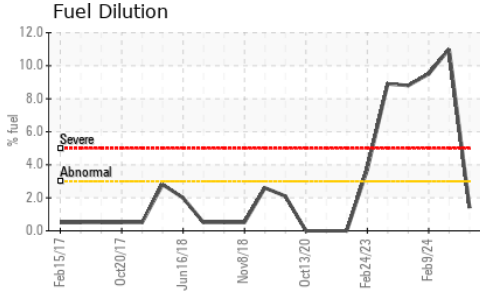

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	▲ 11.1 ▲ 11.4

## GRAPHS

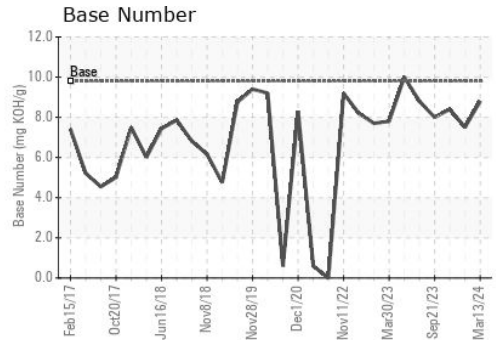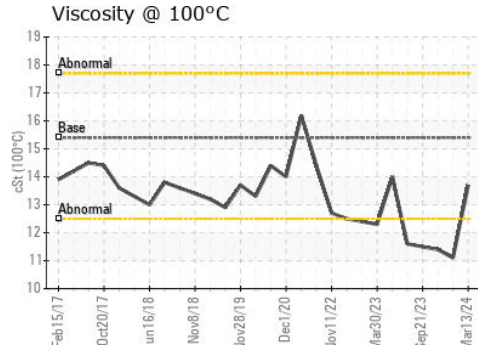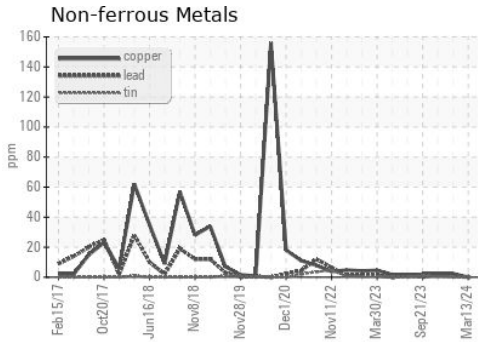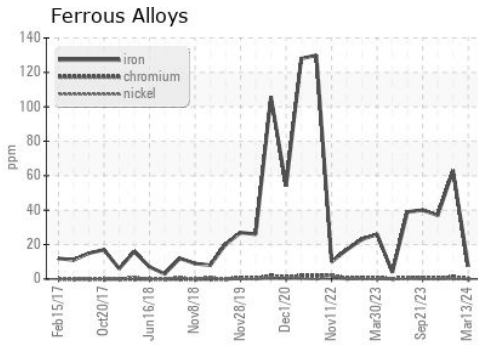

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0113703  
**Lab Number** : 06127587  
**Unique Number** : 10941738  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)  
 13737 Plant Rd  
 Childersburg, AL  
 US 35044  
 Contact: JONATHAN WILLIAMS  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: