

## **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

## East Chicago Operations LIEBHERR MH-12 (S/N LHZ074 Component

**Hydraulic System** 

AW HYDRAULIC OIL ISO 46 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

744ZZK014	140)					
				Mar2024		
SAMPLE INFOR		method	limit/base		biotonut	history2
	WATON		iiiiii/base		history1	
Sample Number		Client Info Client Info		PCA0113802 14 Mar 2024		
Sample Date Machine Age	hrs	Client Info		14 Mar 2024		
Dil Age	hrs	Client Info		682		
Dil Changed	1115	Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Vater		WC Method		NEG		
WEAR METAL	c		limit/base		biotonut	history?
		method			history1	history2
ron	ppm	ASTM D5185m	>20	3		
Chromium	ppm	ASTM D5185m	>10	<1		
lickel ītanium	ppm	ASTM D5185m ASTM D5185m	>10	0		
Silver	ppm	ASTM D5185m		0		
Numinum	ppm ppm	ASTM D5185m	>10	0		
.ead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>75	<1		
in	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
/lolybdenum	ppm	ASTM D5185m	5	0		
langanese	ppm	ASTM D5185m		0		
lagnesium	ppm	ASTM D5185m	25	<1		
Calcium	ppm	ASTM D5185m	200	61		
hosphorus	ppm	ASTM D5185m	300	357		
Zinc	ppm	ASTM D5185m	370	445		
Sulfur	ppm	ASTM D5185m	2500	1040		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	0		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEAN	LINESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	3799		
Particles >6µm		ASTM D7647	>5000	573		
Particles >14µm		ASTM D7647	>640	34		
Particles >21µm		ASTM D7647	>160	7		
Particles >38µm		ASTM D7647	>40	0		
Particles >71µm		ASTM D7647	>10	0		
Dil Cleanliness		ISO 4406 (c)	>21/19/16	19/16/12		
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.507		

Contact/Location: DAN GERTLER - SCREAS



25

Ê 20


of particles (1 r


5

n,


Mar1


## **OIL ANALYSIS REPORT**

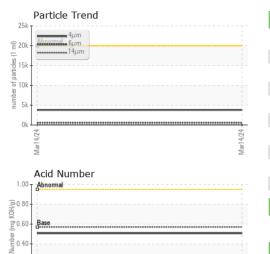

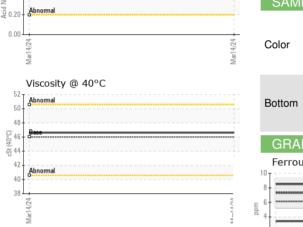

# GRAPHS Ferrous Alloys Particle Trend

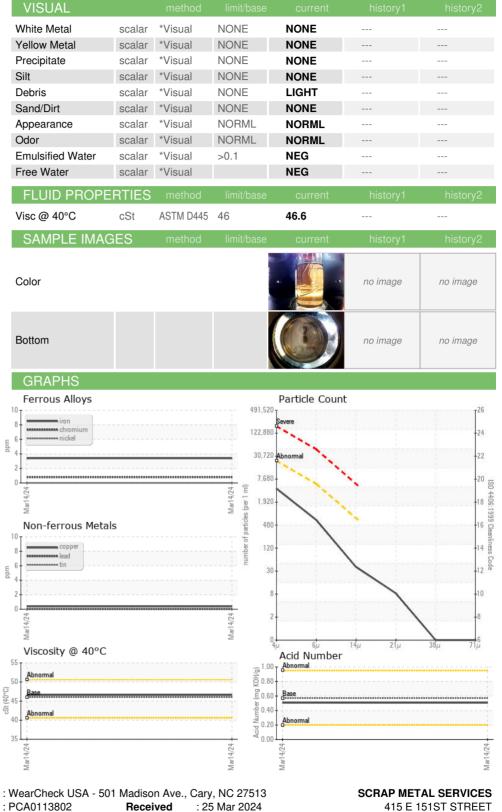



Tested

: 27 Mar 2024

55

50 (40°C)

41 ŝ

41

35

Laboratory

Sample No.

Lab Number : 06127785

EAST CHICAGO, IN US 46312 Contact: DAN GERTLER dgertler@scrapmetalservices.com T: (312)771-4999 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: